



Technical Detail

Swivel double arm glass connector

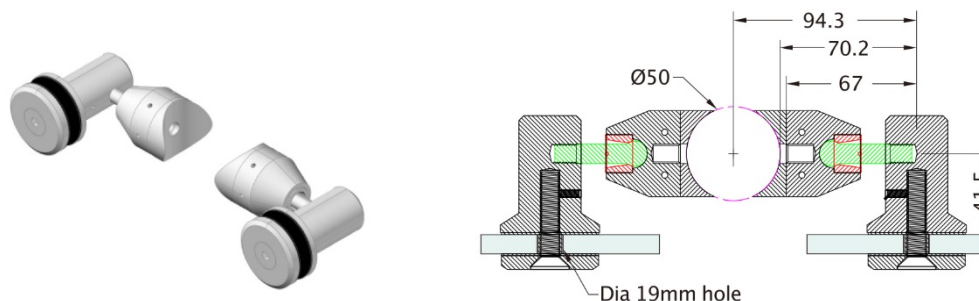


MODEL	Glass thickness	Glass type	Max. glass weight
SSGC017XX16S	12mm glass	Tempered	40kg

Finishes = Brushed stainless steel

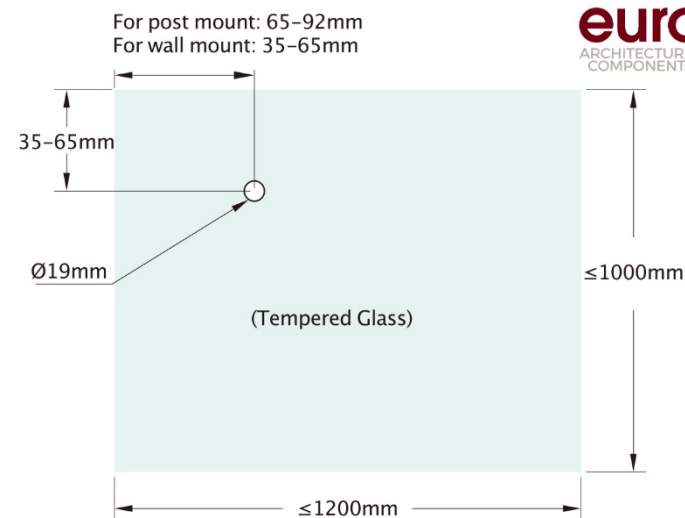


Installation Instructions

Option 1: Round post mount

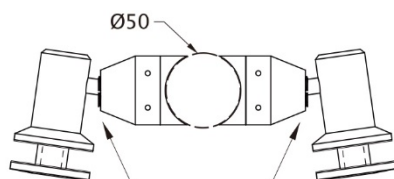


Designed for segment applications. Each swivel fitting is adjustable up to 8 degrees.

Option 2: Square or rectangular post mount

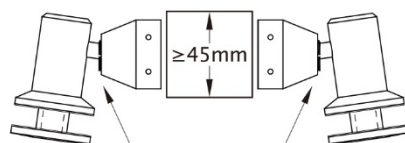

Option 3: Wall Mount




Step 1. Install the double arm connector onto the post or wall.

*For round posts or flat posts with a width of 50mm or less, thread the M10×70mm screw through the post and install the connectors on either ends of the screw.

*For wider posts or wall mounting, use one M10×50mm screw for each side.

Step 2. Align the 19mm diameter hole on the glass with the glass connector and install as shown.

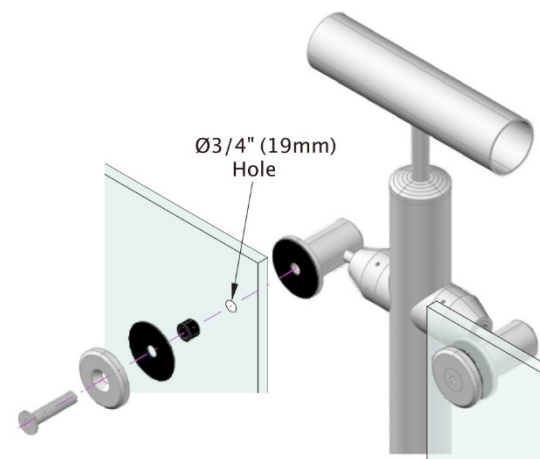

Tools required for installation:

Spirit Level
Measuring tape
Power drill
8-10 mm drill bit for installation stone

Please see safety instructions on power drill before starting assembly