

Stainless Steel & Glass Hardware Collection

Volume 4.3





Style. Design. Innovation.

EURO ARCHITECTURAL COMPONENTS (EAC) has been your #1 source for custom-made Components and is Canada's largest distributor of Architectural Components for the Railing, Fence, and Glass industries. We pride ourselves on our ability to develop new products, create trends and design styles you desire. In recent years, we have added a wide variety of new product lines, including but not limited to Elite Posts - Handrail Series and Frameless Series, Glass Wall Channels, Patch Fittings, Glass Panels, Shower Fittings, and more.

Style

We listen to our customers and are encouraged to remain current with the latest looks. Recently, we expanded our extensive colour line by offering PVD Brushed Gold, and custom Powder Coating in Satin Black, Texture Black, Matte White, and many more.

Design

Our Tilt-Lock™ product range continues to grow, now featuring Base Shoes, Spigots, and the latest additions: the T3 Adjustable Lockable Glass Standoffs and Side Mount Post Adapters. Committed to innovation, Tilt-Lock™ ensures maximum versatility and ease of installation on-site. Offering the most refined solution for both commercial and residential glass railing systems.

Innovation

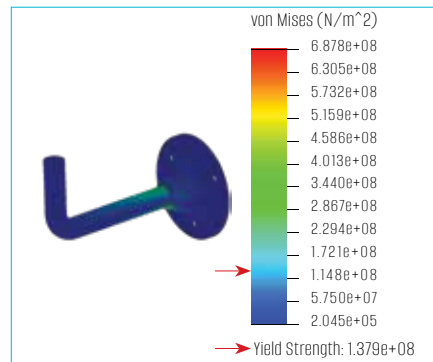

Many years of experience in the architectural industry drives our desire to craft innovative products. Our team of experts will help turn your designs into reality by providing product development services for exclusive custom products from ideation all the way through to final testing and certification.

Simplicity, precision, and quality are the key features that our engineering team aims for during product development by using the latest state-of-the-art CAD/CAE programs and equipment such as 3D printers.

Our goal is to develop and innovate every product meticulously, ensuring that the final product meets or exceeds standard strength requirements while taking into consideration aesthetics and ease of installation.

Our in-house testing and certification procedure helps ensure that new products undergoing integrated developing stages comply with national and provincial building codes.

For more details on product development and to inquire about sourcing your exclusive design, please contact engineering@euroeac.com.





1

Base Shoes

- 01 Base Shoes with Tilt-Lock™



23

Spigots

- 25 Spigots with Tilt-Lock™
- 33 Standard Spigots



37

Standoffs

- 39 T3 Adjustable Standoffs with Tilt-Lock™
- 43 Standard Non-Adjustable Standoffs



47

Mini Posts



49

Posts & Accessories


- 51 Elite Posts
- 69 Standard Posts, Prefabricated Posts, & Accessories
- 75 Heavy Duty Posts



81

Post Bases

- 83 Round Discs, Base Plates, Flanges, Mounts, Covers
- 85 Square Base Plates, Flanges, Mounts, Covers



87

Glass Clips & Connectors

- 89 Glass Clips & Gaskets
- 93 Glass Connectors



97

Glass Railing Tops

- 99 Stainless Steel Cap Rails & Fittings
- 103 Aluminum Cap Rails & Fittings
- 107 Top Channels & Fittings
- 109 Top Edge Covers



111

Tubes / Rods / Bars


- 113 Round Fittings
- 117 Square Fittings
- 118 Rectangular Fittings



121

Handrail Components

- 123 Handrail Attachment Plates
- 124 Handrail Connectors
- 125 Tube Supports
- 127 Handrail Brackets



135

Rod Railing Components

- 136 Rod Connectors, Holders & Accessories



137

Horizontal Tubing



139

CableRail®

- 149 CableRail® Conceal Kit
- 151 Design Rail



159

Coloured Stainless Steel Balusters



163

LumaRail LED Lighting



167

Glass Panels & Accessories

- 170 Tools & Glass Handling



169

Glass Pool Gate Hardware

- 171 Standard Hinges & Latches
- 173 Polaris Hinges & Latches
- 176 Door Stop



177

Glass Door Hardware

- 189 Patch Fittings & Accessories
- 182 Handles
- 183 Locks



185

Glass Wall Channels & Kits

- 185 Glass Wall Channel Kits
- 189 Glass Wall Channels



191


Sliding Glass Door Hardware



195

Wine Cellar Collection

- 197 Wine Cellar Pegs
- 199 Wood Crates & Glass Holders



201

Fasteners, Drill Bits & Taps

- 201 Screws, Rods & Accessories
- 203 Bolts, Anchors, & Accessories
- 206 Drill Bits & Taps



207

Metal Machinery, Tools & Accessories

- 209 Bandsaws & Metal Saws
- 211 Grinding Tools & Accessories
- 213 Metal Finishing
- 214 Notching Systems



215

Cleaners, Silicones & Accessories

- 217 Glass Care

Base Shoes with TVLT-LOCK™



Adjustable Railing Technology

Ready-to-Install
Easy Adjustability
Residential & Commercial





EAC Base Shoes with Tilt-Lock™ Technology



Our exclusive **Ready-to-Install** Base Shoes with **Tilt-Lock™** Technology are available in 6 models: **M2, M3, M4, M5, M6L, & M6Y**, accommodating Glass sizes from **12-26.52mm**.



All our Base Shoes are available as **Top Mounts**, which can be **Recessed** and finished with optional Top Cover Cladding. **Side Mount** options are available with our **M3** and **M6Y** models and as a custom order with our **M4** and **M5** models. Kits come Non-Cladded or with your choice of Cladding available in Brushed Clear or Brushed Black Anodized Aluminum, or 316 Grade Satin Stainless Steel.

Tilt-Lock™ technology allows a **2°** front and back tilt of the Glass within the Shoe, giving you faster and easier installation with exact alignment every time. This is all achievable from one side, making your projects more efficient.

EAC Base Shoes with **Tilt-Lock™** Technology are **Ready-to-Install** with pre-drilled holes and fully concealed components, offering a clean, finished, and perfectly aligned look. Additional accessories are available.

Features

- Engineered for the National Building Code of Canada. Refer to back inside cover for glass guard design information.



Patented in Canada, the U.S., the U.K., Europe, Australia, New Zealand, and China.



Curved Base Shoe

Base Shoes could be formed to support curved Glass Panels.

SPECIAL ORDER ONLY.
Please inquire.



Base Shoes Overview

Cladding Options




Residential Shoe Kits come Cladded and Non-Cladded and include Base Shoe, Gaskets, Grips, and End Caps.

Commercial Shoe Kits require your choice of Glass Kit option to accommodate your Glass size.



*Glass Kits are a package including Grips and Gaskets tailored for specific Glass thicknesses. Select your desired Glass Kit for M4 (Pg 14), M5 (Pg 18), & M6 (Pg 21,22).




Use 1/2" or M12 Fasteners. Refer to pages 203-207



M2
SSSM2SHOE
Residential

M3
SSSM3SHOE
Residential

M4
SSSM4SHOE
Commercial


GLASS THICKNESS (mm)	12 - 12.76	12 - 12.76	12 - 17.52
12 - 12.76	Kit	Kit	—
12 - 13.52	—	—	Base + Glass Kit*
14.28 - 15	—	—	Base + Glass Kit*
16 - 17.52	—	—	Base + Glass Kit*
19 - 21.52	—	—	—
24.76 - 26.52	—	—	—
LENGTH	10'	10' & 20'	10'
NUMBER OF HOLES	10	10 for 10' / 20 for 20'	20
HOLE SPACE	12"	12"	6"
TOP MOUNT	Kit 10'	Kit 10' & 20'	Kit 10'
SIDE MOUNT	—	Kit 10'	Custom Order
RECESSED	Yes	Yes	Yes
CLADDING OPTIONS	A, B, S	A, B, S	A, B, S
INSTALLATION VIDEO			

Aluminum Kits (A) & (B)

- **SHOE:** Alkaline Anodized Aluminum 6063-T6.
- **CLADDING:** Brushed Clear and Brushed Black Anodized Aluminum 6463-T5 with attached Gaskets.
- **END CAPS:** Brushed Clear and Brushed Black Anodized Aluminum 6463-T5 to match cladding.

*Glass Kits are a package including Grips and Gaskets tailored for specific Glass thicknesses. Select your desired Glass Kit for M4 (Pg 14), M5 (Pg 18), & M6 (Pg 21,22).

Use 1/2" or M12 Fasteners.
Refer to pages 203-207




M5

SSSM5SHOE
Commercial

Stainless Steel Kits (S)


- **SHOE:** Alkaline Anodized Aluminum 6063-T6.
- **CLADDING:** Stainless Steel 316L in Satin finish and small Aluminum Clip-on Channel with attached Gaskets.
- **END CAPS:** Stainless Steel 316L in Satin finish to match Cladding.

M6 Shoes are custom order.
Please Inquire.






M6L

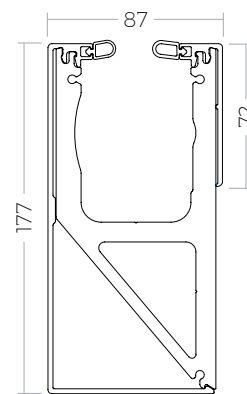SSSM6SHOEL
Commercial



M6Y

SSSM6SHOEY
Commercial

GLASS THICKNESS (mm)	19 - 26.52	19 - 26.52	19 - 26.52
12 - 12.76	—	—	—
12 - 13.52	—	—	—
14.28 - 15	—	—	—
16 - 17.52	—	—	—
19 - 21.52	Base + Glass Kit*	Base + Glass Kit*	Base + Glass Kit*
24.76 - 26.52	Base + Glass Kit*	Base + Glass Kit*	Base + Glass Kit*
LENGTH	10'	10'	10'
NUMBER OF HOLES	20	20	20
HOLE SPACE	6"	6"	6"
TOP MOUNT	Kit 10'	Kit 10'	—
SIDE MOUNT	Custom Order	—	Kit 10'
RECESSED	Yes	—	—
CLADDING OPTIONS	A, B, S	A, B, S	A, B, S
INSTALLATION VIDEO			

M2

BASE SHOE




PHOTO: Fort Rouge Glass Ltd.




M2 Base Shoe

Residential
Interior / Exterior

TVLT-LOCK™
Adjustable Railing Technology




Top Mount
Aluminum Cladding

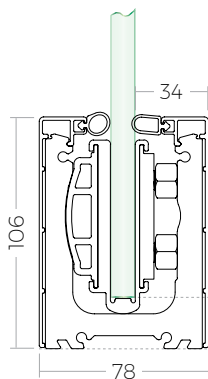


Glass sits
23mm
above ground

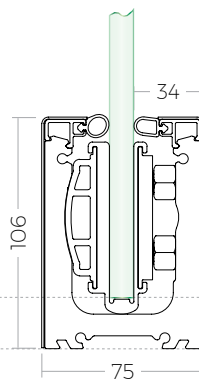Top Mount
Stainless Steel Cladding



Recessed or
No Cladding

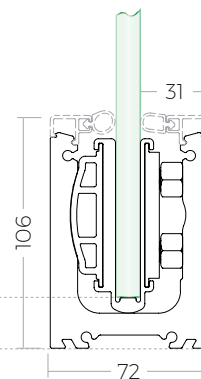

Kit Includes

PART #	Shoe Length	Full Cover Cladding	Glass Grips	End Caps	Joining Pins	Glass Gap
Top Mount Cladded Kits						
SSSM2SHOE10A	10'	2 x 10'	10	2	4	1 x 4"
SSSM2SHOE10B	10'	2 x 10'	10	2	4	1 x 4"
SSSM2SHOE10S	10'	2 x 10'	10	2	4	1 x 4"
Top Mount Non-Cladded Kit						
SSSM2SHOE10	10'	N/A	10	2	4	1 x 4"



Cladding

Top Cover Cladding

Sold as a pair with Gaskets for **12-12.76mm** Glass thickness.

- SSSM3TCC10A** 10' Brushed Clear Anodized Aluminum.
- SSSM3TCC10B** 10' Brushed Black Anodized Aluminum.



Top Mount Cladding 10' Lengths

Sold individually with installed Gasket for **12-12.76mm** Glass included.

- SSSM2CLADA** Brushed Clear Anodized Aluminum.
- SSSM2CLADB** Brushed Black Anodized Aluminum.
- SSSM2CLADS** Satin Stainless Steel SS316.



Cladding Tape

Can be used when installing Cladding.

- SSSMCLADTAPE** Double-sided, 108' length.



90° Base Shoe Corners

90° Aluminum extruded 6" mitered corners with 2 Holes, 2 Washers, and 4 Joining Pins.

- SSSM2CCSHOEI** Inside.
- SSSM2CCSHOEO** Outside.



90° Corner Cut Cladding Kits

90° Mitered Corner Cladding Kits match Top Mount Base Shoe. Each Kit consists of 2 outside and 2 inside pieces to complete the corner. 12" in length.

Includes: Cladding And Gaskets.

- SSSM2CCKITA** Brushed Clear Anodized Aluminum.
- SSSM2CCKITB** Brushed Black Anodized Aluminum.
- SSSM2CCKITS** Satin Stainless Steel SS316.



Drain Blocks

Anodized Aluminum. Sold in a package of 10.

- SSSM2DRAINT** For M2, 3/8" thick.



End Caps

Top Mount Installations

Sold in a package of 2.

SSSM2ENDCP1X	Brushed Clear Anodized Aluminum.
SSSM2ENDCP2X	Brushed Black Anodized Aluminum.
SSSM2ENDCP3X	Satin Stainless Steel SS316.

Top Mount Stair Installations

Sold Individually.

SSSM2ENDCAP1	Brushed Clear Anodized Aluminum.
SSSM2ENDCAP2	Brushed Black Anodized Aluminum.
SSSM2ENDCAP3	Satin Stainless Steel SS316.



Leveling Shims

Anodized Aluminum. Sold in a package of 5.

SSSM2SHIM	1.5mm thick.
------------------	--------------



Grips

Sold in a package of 2 for **12-12.76mm** Glass.

SSSM2GRIPS



Gap Rubber Spacer

Glass Spacer to fill the gap between Glass Panels.

SSSM2GAP



Joining Pins

Sold in a package of 4. Pins are used to attach sections of the extruded Base Shoe together.

SSSM3JOINPIN



Tools

Wrenches for Base Shoe Grips. Open End Wrench size: 19mm or 3/4".

SSWRENCH1	Standard Wrench.
SSWRENCH3	Ratcheting Wrench.

M3

BASE SHOE


PHOTO: AC Glass & Mirror Ltd




M3 Base Shoe

Residential
Interior / Exterior


TVLT-LOCK™
Adjustable Railing Technology




Top Mount
Aluminum Cladding

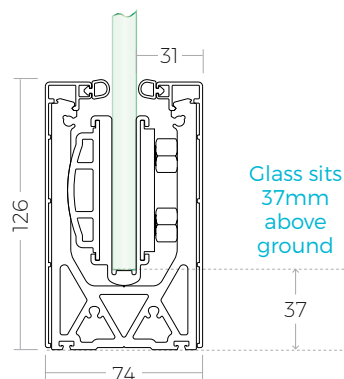


Top Mount
Stainless Steel Cladding

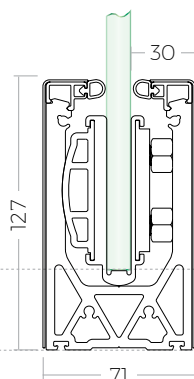

Side Mount
Aluminum Cladding

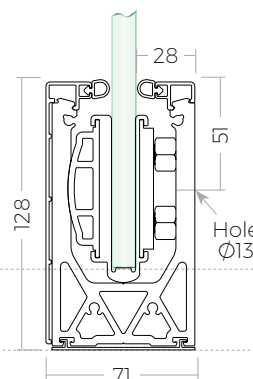

Recessed or
No Cladding

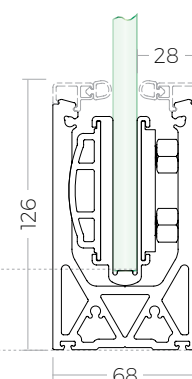

Kit Includes

PART #	Shoe Length	Full Cover Cladding	Glass Grips	End Caps	Joining Pins	Glass Gap	Stabilizing Washers
Top Mount Cladded Kits							
SSSM3SHOE10A	10'	2 x 10'	10	2	4	1 x 4"	10
SSSM3SHOE10B	10'	2 x 10'	10	2	4	1 x 4"	10
SSSM3SHOE10S	10'	2 x 10'	10	2	4	1 x 4"	10
SSSM3SHOE20A	20'	2 x 20'	20	2	8	1 x 8"	20
SSSM3SHOE20S	20'	2 x 20'	20	2	8	1 x 8"	20
Top Mount Non-Cladded Kits							
SSSM3SHOE10	10'	N/A	10	2	4	1 x 4"	10
SSSM3SHOE20	20'	N/A	20	2	8	1 x 8"	20
Side Mount Cladded Kits							
SSSM3SIDE10A	10'	1 x 10'	10	2	4	1 x 4"	10
SSSM3SIDE10B	10'	1 x 10'	10	2	4	1 x 4"	10



Cladding

Top Cover Cladding

Sold as a pair with Gaskets for **12-12.76mm** Glass thickness.

SSSM3TCC10A	10' Brushed Clear Anodized Aluminum.
SSSM3TCC10B	10' Brushed Black Anodized Aluminum.

Top Mount Cladding 10' Lengths

Sold individually with installed Gasket for **12-12.76mm** Glass included.

SSSM3CLADA	Brushed Clear Anodized Aluminum.
SSSM3CLADB	Brushed Black Anodized Aluminum.
SSSM3CLADC	Mill Finish Aluminum.
SSSM3CLADS	Satin Stainless Steel SS316.
SSSM3CLADM	Mirror Stainless Steel SS316.
SSSM3CLADSB	Satin Black Anodized Aluminum. NEW



20' Lengths

Sold individually with installed Gasket for **12-12.76mm** Glass included.

SSSM3CLADA1	Brushed Clear Anodized Aluminum.
SSSM3CLADS1	Satin Stainless Steel SS316.

Side Mount Cladding 10' Lengths

Sold Individually with installed Gasket for **12-12.76mm** Glass included.

SSSM3CLADXA	Brushed Clear Anodized Aluminum.
SSSM3CLADXB	Brushed Black Anodized Aluminum.



Cladding Tape

Can be used when installing Cladding.

SSSMCLADTAPE	Double-sided, 108' length.
---------------------	----------------------------



90° Base Shoe Corners For Top Mount Shoes Only

90° Aluminum extruded 6" mitered corners with 2 Holes, 2 Washers, and 4 Joining Pins.

SSSM3CCSHOEI	Inside.
SSSM3CCSHOEI	Outside.



90° Corner Cut Cladding Kits For Top Mount Shoes Only

90° Mitered Corner Cladding Kits match Top Mount Base Shoe. Each Kit consists of 2 outside and 2 inside pieces to complete the corner. 12" in length.

Includes: Cladding and Gaskets.

SSSM3CCKITA	Brushed Clear Anodized Aluminum.
SSSM3CCKITB	Brushed Clear Anodized Aluminum.
SSSM3CCKITS	Satin Stainless Steel SS316.



Drain Blocks

Anodized Aluminum. Sold in a package of 10.

SSSM3DRAINT	For M3 Top Mount Shoe. 3/8" thick.
SSSM3DRAINS	For M3 Side Mount Shoe. 3/8" thick.

Top Mount

Side Mount

End Caps

Top Mount Installations

Sold in a package of 2.

SSSM3ENDCP1X	Brushed Clear Anodized Aluminum.
SSSM3ENDCP3X	Brushed Clear Anodized Aluminum.
SSSM3ENDCP2X	Satin Stainless Steel SS316.
SSSM3ENDCP4X	Mirror Stainless Steel SS316.
SSSM3ENDCP5X	Satin Black Anodized Aluminum. NEW

Top & Side Mount Stair Installations

Sold Individually.

SSSM3ENDCAP1	Brushed Clear Anodized Aluminum.
SSSM3ENDCAP5	Brushed Black Anodized Aluminum.
SSSM3ENDCAP2	Satin Stainless Steel SS316.
SSSM3ENDCAP7	Mirror Stainless Steel SS316.
SSSM3ENDCAP4	Satin Black Anodized Aluminum. NEW

Side Mount Installations

Sold Individually.

SSSM3ENDCAP3	Brushed Clear Anodized Aluminum.
---------------------	----------------------------------

Leveling Shims

Anodized Aluminum. Sold in a package of 5.

SSSM3SHIM1	1.5mm thick.
SSSM3SHIM2	3mm thick.

Grips

Sold in a package of 2 for **12-12.76mm** Glass.

SSSM3GRIPS

Gap Rubber Spacer

Glass Spacer to fill the gap between Glass Panels.

SSSM3GAP

Joining Pins

Sold in a package of 4. Pins are used to attach sections of the extruded Base Shoe together.

SSSM3JOINPIN

Tools

Wrenches for Base Shoe Grips. Open End Wrench size: 19mm or 3/4".

SSWRENCH1	Standard Wrench.
SSWRENCH3	Ratcheting Wrench.



M4

BASE SHOE





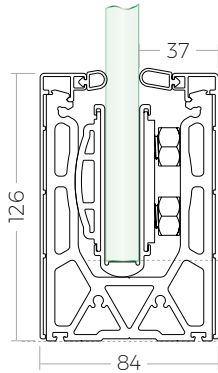
M4 Base Shoe

Residential / Commercial
Interior / Exterior

TVLT-LOCK™
Adjustable Railing Technology




Top Mount
Aluminum Cladding




Top Mount
Stainless Steel Cladding

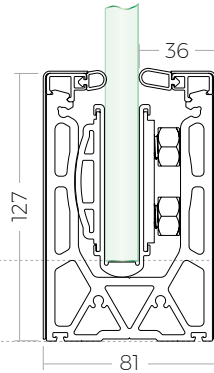
Glass sits
37mm
above
ground



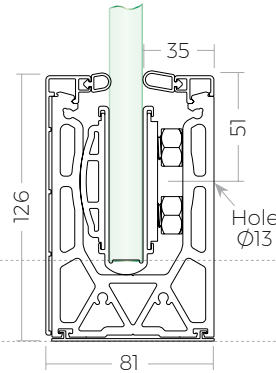Side Mount
Aluminum Cladding
CUSTOM ORDER



Recessed or
No Cladding

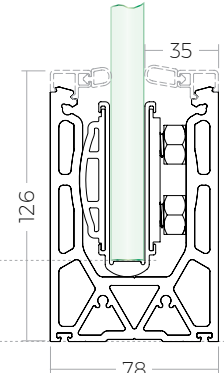

Kit Includes

PART #	Shoe Length	Full Cover Cladding	*Glass Grips	End Caps	Joining Pins	Glass Gap	Stabilizing Washers
Top Mount Cladded Kit							
SSSM4SHOE10A	10'	2 x 10'	10	2	4	1 x 4"	10
SSSM4SHOE10B	10'	2 x 10'	10	2	4	1 x 4"	10
SSSM4SHOE10S	10'	2 x 10'	10	2	4	1 x 4"	10
Top Mount Non-Cladded Kit							
SSSM4SHOE10	10'	N/A	10	2	4	1 x 4"	10

*10 Glass Grips are included in Glass Kit Options below. Select Glass Kit option to suit your Glass thickness.

Glass Kit Options

PART #	Glass Thickness (mm)
SSSM4GLASS1	12-13.52
SSSM4GLASS2	14.28-15
SSSM4GLASS3	16-17.52



Cladding Top Cover Cladding

Sold as a pair. Use the Gaskets provided in the Glass Kit.

- SSSM3TCC10A** 10' Brushed Clear Anodized Aluminum.
- SSSM3TCC10B** 10' Brushed Black Anodized Aluminum.

10' Lengths

Sold as a pair. Use the Gaskets provided in the Glass Kit.

- SSSM3CLADA** Brushed Clear Anodized Aluminum.
- SSSM3CLADB** Brushed Black Anodized Aluminum.
- SSSM3CLADC** Mill Finish Aluminum.
- SSSM3CLADS** Satin Stainless Steel SS316.
- SSSM3CLADM** Mirror Stainless Steel SS316.
- SSSM3CLADSB** Satin Black Anodized Aluminum. **NEW**



20' Lengths

Sold as a pair. Use the Gaskets provided in the Glass Kit.

- SSSM3CLADA1** Brushed Clear Anodized Aluminum.
- SSSM3CLADS1** Satin Stainless Steel SS316.



Cladding Tape

Can be used when installing Stainless Steel Cladding.

- SSSMCLADTAPE** Double-sided, 108' length.



90° Base Shoe Corners For Top Mount Shoes Only

90° Aluminum extruded 6" mitered corners with 2 Holes, 2 Washers, and 4 Joining Pins.

- SSSM4CCSHOEI** Inside.
- SSSM4CCSHOEI** Outside.



90° Corner Cut Cladding Kits For Top Mount Shoes Only

90° Mitered Corner Cladding Kits match Top Mount Base Shoe. Each Kit consists of 2 outside and 2 inside pieces to complete the corner. 12" in length.

Includes: Cladding. Use the Gaskets provided in the Glass Kit.

- SSSM3CCKITA** Brushed Clear Anodized Aluminum.
- SSSM3CCKITB** Brushed Black Anodized Aluminum.
- SSSM3CCKITS** Satin Stainless Steel SS316.



Drain Blocks

Anodized Aluminum. Sold in a package of 10.

SSSM4DRAINT For M4 Top Mount. 3/8" thick.



End Caps

Top Mount Installations

Sold in a package of 2.

SSSM4ENDCAP3 Brushed Black Anodized Aluminum.

SSSM4ENDCAP2 Satin Stainless Steel SS316.

SSSM4ENDCAP4 Powder Coated Satin Black. 

Top & Side Mount Stair Installations

Sold Individually.

SSSM4ENDCAP1 Brushed Clear Anodized Aluminum.



Leveling Shims

Anodized Aluminum. Sold in a package of 5.

SSSM4SHIM1 1.5mm thick.

SSSM4SHIM2 3mm thick.



Grips

Sold in a package of 2 for 16-17.52mm Glass.

SSSM4GRIPS



Gap Rubber Spacer

Glass Spacer to fill the gap between Glass Panels.

SSSM4GAP



Joining Pins

Sold in a package of 4. Pins are used to attach sections of the extruded Base Shoe together.

SSSM3JOINPIN



Tools

Wrenches for Base Shoe Grips. Open End Wrench size: 19mm or 3/4".

SSWRENCH1 Standard Wrench.

SSWRENCH3 Ratcheting Wrench.

M5

BASE SHOE







M5 Base Shoe

Residential / Commercial
Interior / Exterior


TVLT-LOCK™
Adjustable Railing Technology




Top Mount
Aluminum Cladding

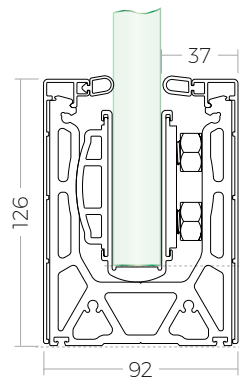


Top Mount
Stainless Steel Cladding

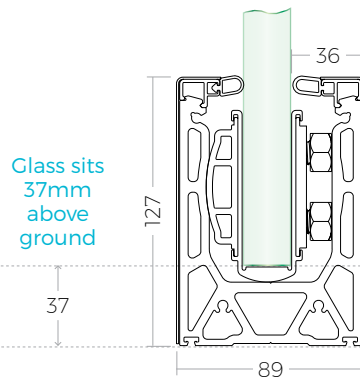

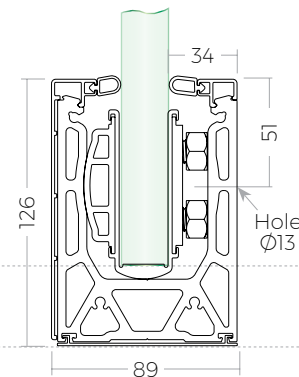Side Mount
Aluminum Cladding
CUSTOM ORDER



Recessed or
No Cladding

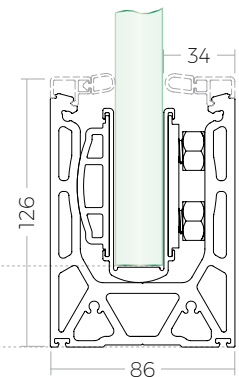

Kit Includes

PART #	Shoe Length	Full Cover Cladding	*Glass Grips	End Caps	Joining Pins	Glass Gap	Stabilizing Washers
Top Mount Cladded Kit							
SSSM5SHOE10A	10'	2 x 10'	10	2	4	1 x 4"	10
SSSM5SHOE10B	10'	2 x 10'	10	2	4	1 x 4"	10
SSSM5SHOE10S	10'	2 x 10'	10	2	4	1 x 4"	10
Top Mount Non-Cladded Kit							
SSSM5SHOE10	10'	N/A	10	2	4	1 x 4"	10

*10 Glass Grips are included in Glass Kit Options below. Select Glass Kit option to suit your Glass thickness.

Glass Kit Options

PART #	Glass Thickness (mm)
SSSM5GLASS1	19-21.52
SSSM5GLASS2	24.76-26.52



Cladding Top Cover Cladding

Sold as a pair. Use the Gaskets provided in the Glass Kit.

SSSM3TCC10A	10' Brushed Clear Anodized Aluminum.
SSSM3TCC10B	10' Brushed Black Anodized Aluminum.

10' Lengths

Cladding. Use the Gaskets provided in the Glass Kit.

SSSM3CLADA	Brushed Clear Anodized Aluminum.
SSSM3CLADB	Brushed Black Anodized Aluminum.
SSSM3CLADC	Mill Finish Aluminum.
SSSM3CLADS	Satin Stainless Steel SS316.
SSSM3CLADM	Mirror Stainless Steel SS316.
SSSM3CLADSB	Satin Black Anodized Aluminum. NEW



20' Lengths

Cladding. Use the Gaskets provided in the Glass Kit.

SSSM3CLADA1	Brushed Clear Anodized Aluminum.
SSSM3CLADS1	Satin Stainless Steel SS316.



Cladding Tape

Can be used when installing Cladding.

SSSMCLADTAPE	Double-sided, 108' length.
---------------------	----------------------------



90° Base Shoe Corners For Top Mount Shoes Only

90° Aluminum extruded 6" mitered corners with 2 Holes, 2 Washers, and 4 Joining Pins.

SSSM5CCSHOEI	Inside.
SSSM5CCSHOE0	Outside.



90° Corner Cut Cladding Kits For Top Mount Shoes Only

90° Mitered Corner Cladding Kits match Top Mount Base Shoe. Each Kit consists of 2 outside and 2 inside pieces to complete the corner. 12" in length.

Includes: Cladding. Use the Gaskets provided in the Glass Kit.

SSSM3CCKITA	Brushed Clear Anodized Aluminum.
SSSM3CCKITB	Brushed Black Anodized Aluminum.
SSSM3CCKITS	Satin Stainless Steel SS316.



Drain Blocks

Anodized Aluminum. Sold in a package of 10.

SSSM5DRAINT For M5, 3/8" thick.



End Caps

Top Mount Installations

Sold in a package of 2.

SSSM5ENDCAP3 Brushed Black Anodized Aluminum.

SSSM5ENDCAP2 Satin Stainless Steel SS316.

SSSM5ENDCAP4 Powder Coated Satin Black. **NEW**

Top & Side Mount Stair Installations

Sold Individually.

SSSM5ENDCAP1 Brushed Clear Anodized Aluminum.



Leveling Shims

Anodized Aluminum. Sold in a package of 5.

SSSM5SHIM1 1.5mm thick.

SSSM5SHIM2 3mm thick.



Grips

Sold in a package of 2 for 19-21.52mm Glass.

SSSM5GRIPS



Gap Rubber Spacer

Glass Spacer to fill gap between Glass Panels.

SSSM5GAP



Joining Pins

Sold in a package of 4. Pins are used to attach sections of the extruded Base Shoe together.

SSSM3JOINPIN

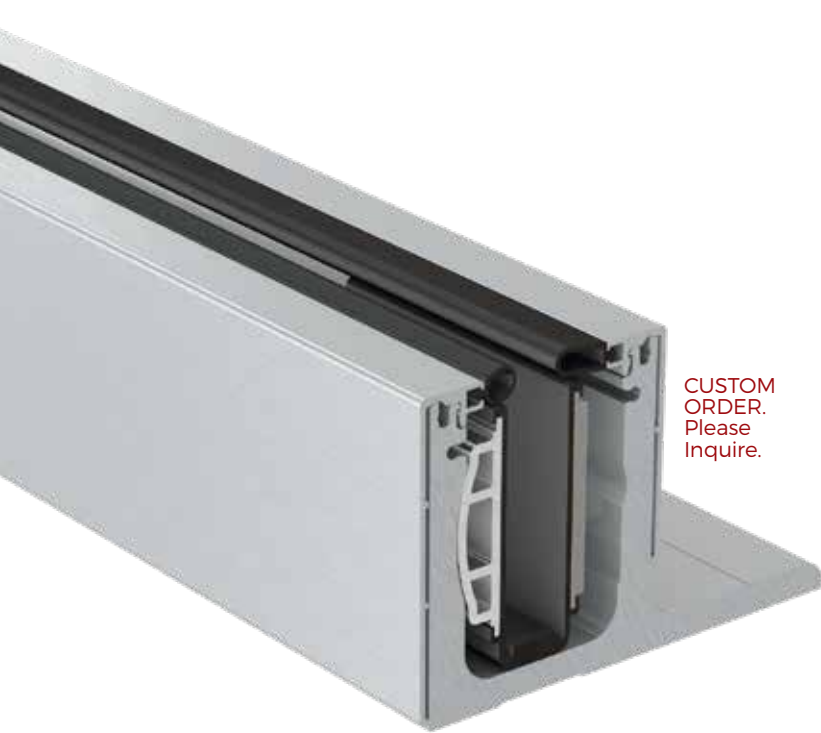


Tools

Wrenches for Base Shoe Grips. Open End Wrench size: 19mm or 3/4".

SSWRENCH1 Standard Wrench.

SSWRENCH3 Ratcheting Wrench.






CUSTOM
ORDER.
Please
Inquire.


M6L Base Shoe

Commercial
Interior / Exterior

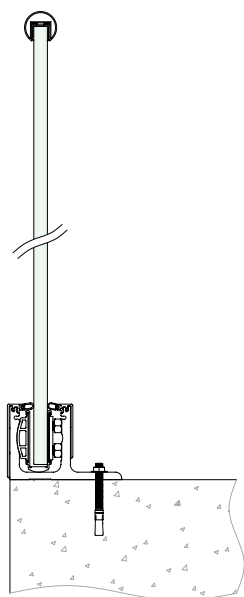TVLT-LOCK™
Adjustable Railing Technology



Top Mount
Aluminum Cladding

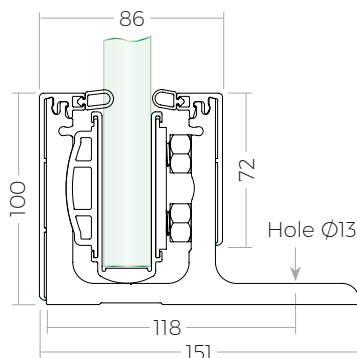

M6L Base Shoe Accessories

Use 1/2"
or M12
Fasteners.
Refer to pages
203-207.



Drain Blocks

Anodized Aluminum.
Sold in a package of 10.

SSSM6DRAINL For M6L 3/8" thick.



Leveling Shims

Anodized Aluminum.
Sold in a package of 5.

SSSM6SHIM1 1.5mm thick.

SSSM6SHIM2 3mm thick.



Gap Rubber Spacer

Glass Spacer to fill the gap
between Glass Panels.

SSSM5CAP

Kit Includes

PART #	Shoe Length	Full Cover Cladding	*Glass Grips	End Caps	Joining Pins	Glass Gap
Top Mount Cladded Kits						
SSSM6SHOELA	10'	2 x 10'	10	2	4	1 x 4"
SSSM6SHOELB	10'	2 x 10'	10	2	4	1 x 4"
SSSM6SHOELS	10'	2 x 10'	10	2	4	1 x 4"

*10 Glass Grips are included in Glass Kit options below. Select Glass Kit option to suit your Glass thickness.

Glass Kit Options

PART #	Glass Thickness (mm)
SSSM6GLASS1	19
SSSM6GLASS2	20-21.52
SSSM6GLASS3	24.76-25.52
SSSM6GLASS4	26.52

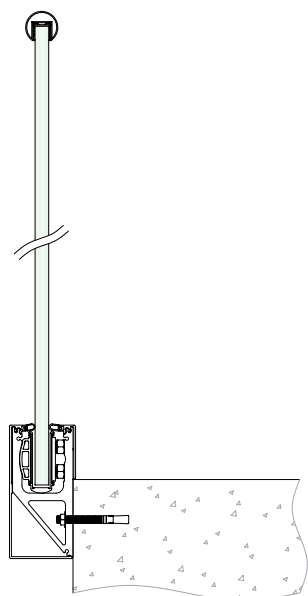


M6Y Base Shoe

Commercial
Interior / Exterior


TVLT-LOCK™
Adjustable Railing Technology



CUSTOM
ORDER.
Please
Inquire.



Side Mount
Aluminum Cladding

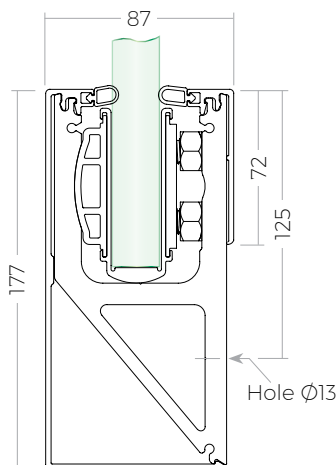

M6Y Base Shoe Accessories

Use 1/2"
or M12
Fasteners.
Refer to pages
203-207.



Drain Blocks

Anodized Aluminum.
Sold in a package of 10.

SSSM6DRAINL For M6L 3/8" thick.



Leveling Shims

Anodized Aluminum.
Sold in a package of 5.

SSSM6SHIM1 1.5mm thick.

SSSM6SHIM2 3mm thick.



Gap Rubber Spacer

Glass Spacer to fill the gap
between Glass Panels.

SSSM5CAP

Kit Includes

PART #	Shoe Length	Full Cover Cladding	*Glass Grips	End Caps	Joining Pins	Glass Gap
Side Mount Cladded Kits						
SSSM6SHOEYA	10'	2 x 10'	10	2	4	1 x 4"
SSSM6SHOEYB	10'	2 x 10'	10	2	4	1 x 4"
SSSM6SHOEYS	10'	2 x 10'	10	2	4	1 x 4"

*10 Glass Grips are included in Glass Kit options below. Select Glass Kit option to suit your Glass thickness.

Glass Kit Options

PART #	Glass Thickness (mm)
SSSM6GLASS1	19
SSSM6GLASS2	20-21.52
SSSM6GLASS3	24.76-25.52
SSSM6GLASS4	26.52

Spigots




PHOTO: Millan Glass & Mirror

Spigots Overview



- Front & back tilt with vertical adjustability.
- Stainless Steel Duplex 2205.



LumaRail™
Top Mount
LED-Ready
Square Base Plate
Cover Model
with **Tilt-Lock™**
Technology

Pg 27.



Top Mount
Square Base Plate
Cover Model
with **Tilt-Lock™**
Technology

Pg 29..



Top Mount
Center Concealed
Mounting Model
with **Tilt-Lock™**
Technology

Pg 30.



Edge Mount
with **Tilt-Lock™**
Technology

Pg 31.





Side Mount
with **Tilt-Lock™**
Technology

Mounts to the fascia
of the deck and is not
visible from the deck
surface.

Pg 32.

Standard Top Mount Models

- Vertical adjustability.
- Stainless Steel Duplex 2205.



Standard 6" Model

Recommended for Landing only.
Pg 33.



Standard 8" Model

Recommended for Landing and Stairs
with a Stopper Pin. Pg 34.



Standard 10" Model

Matches the look of our
Tilt-Lock™ Spigots. Pg 36.

Spigots

with **TILT-LOCK™**

Adjustable Railing Technology

Duplex 2205 Ultra Marine Grade Stainless Steel
Superior Strength
Superior Corrosion Resistance



Spigots with Tilt-Lock™ Adjustability

EAC Spigots are equipped with our exclusive **Tilt-Lock™** Adjustable Railing Technology and are available in 4 models to suit almost every possible mounting requirement for **12-17.52mm** Glass:

- Top Mount Square Base Plate Model.
- Top Mount Centre Concealed Model.
- Edge Mount Model.
- Side Mount Model.

Our Adjustable Spigots with **Tilt-Lock™** Technology are available in 4 Stainless Steel finishes: Satin, Powder Coated Satin Black, and PVD Brushed Graphite Black. These Spigots have clean architectural lines, creating a unique façade and providing a very cost-efficient modern solution for structural Glass Railings. We also offer Standard Spigots in the same finishes.

The **No-Holes-in-the-Glass** system along with our patented technology allows a **2°** front and back tilting of the Glass in the Spigots, giving you a perfect installation every time by simply tightening the upper or lower Screw. All adjustments can be achieved from one side. This strong, reliable Glass Mounting System is highly recommended for pools and decks, where there is constant exposure to the elements in the Exterior environment.

Features

- Duplex 2205 low carbon Ultra Marine Grade Stainless Steel, allowing for superior corrosion resistance as well as more tensile strength than 316 Grade Stainless Steel.
- Highly suitable for use in Exterior structures with a high degree of corrosion due to chlorine or sulphur dioxide load, high humidity, and accumulation of harmful substances (e.g. coastal regions and swimming pool environments).
- Engineered for the National Building Code of Canada. Refer to back inside cover for glass guard design information.



Patented in Canada, U.S., U.K., Europe, Australia, New Zealand, and China.



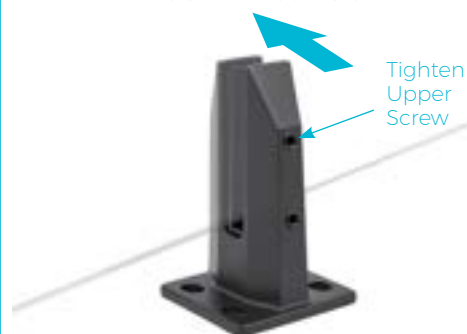
DISCLAIMER: Please be aware that chlorine, dirt, and other particles can get sprayed onto the Spigots if using a power washer while cleaning your Spigot environment. To avoid potential Stainless Steel contamination, remove any residue on Spigots with warm water and soap or mild detergent, then rinse thoroughly with clear hot water.

Adjustment




Tightening

Glass Tilt Backward



Glass Tilt Forward

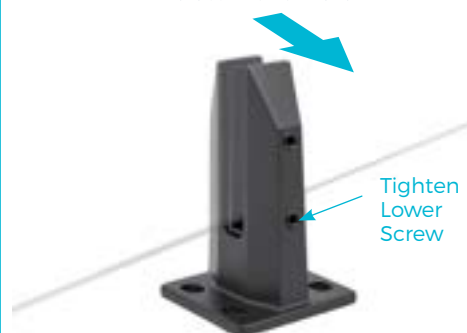




**NEW
PRODUCT**



Top Mount LED-Ready Spigot with Tilt-Lock™ Technology

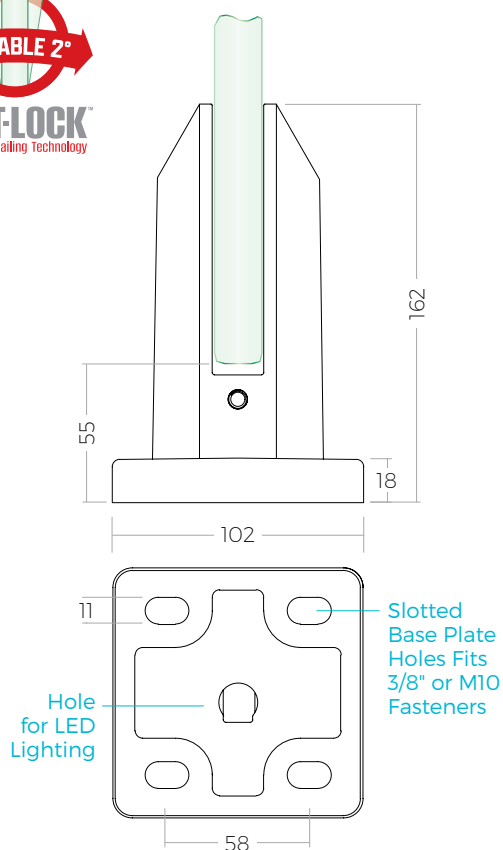LumaRail™
LED RAILING SYSTEMS



SPIGOT PART #	Finish
SSSPIGOTADLS	S
SSSPIGOTADLB	B

Fastener Options

(Sold Separately. See Pg 203-207)

Choose according to your needs.
Refer to engineering for Fastener sizing.

For Wood:



- 3/8" Lag Bolt

For Concrete:



- 3/8" or M10 Wedge Anchors.



- 3/8" or M10 Threaded Rod with Nut, Washer and Epoxy.



Scan for more info and
installation procedure.
Inquire about engineering.



Top Mount Led-Ready Spigot

Features

- LED-compatible top mount adjustable spigot allowing for glass to be tilted $\pm 2^\circ$.
- Made of duplex 2205 low-carbon ultramarine-grade stainless steel. Suitable for 12-15mm glass (13.52-15mm gasket sold separately #SSSPIGOTADLX).
- Slotted base plate holes.
- Cover plate included.



LED Lighting Kit

SSL3KIT (Sold Separately)

Features

- 16-piece LED deck light set - 1.5W RGB
- 4 mode settings: Flash, Strobe, Fade, and Smooth
- Waterproof Rating: IP67, for temperatures from -20°C to 60°C
- Input Voltage: DC 5-24V
- Output Power: 100W
- 1 RGB keypad remote control



Adjustable Spigots



PHOTO: DM l'Equipeur



Top Mount Spigot Square Base Plate Cover Model



Duplex
2205
Stainless
Steel

Pressure
Plate
Model

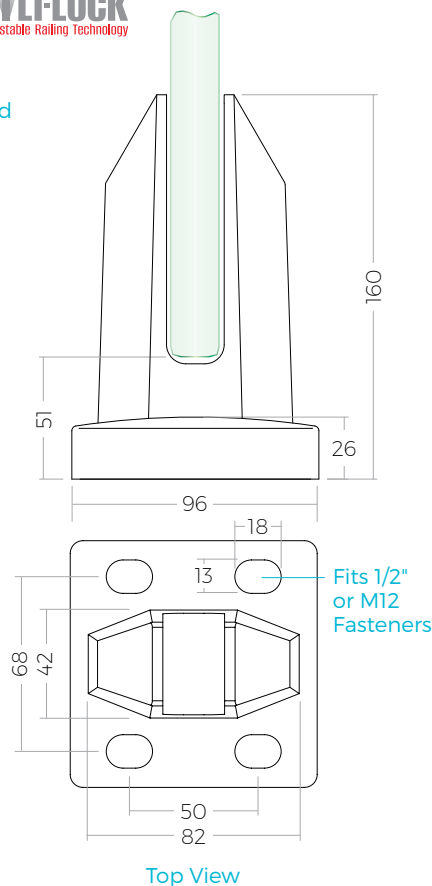
Suitable for
12-17.52mm
Glass

Slotted Base
Plate Holes

Cover Plate
Included

Adjust Outward
Tightening
Screws

Adjust Inward
Tightening
Screws



Top View

SPIGOT PART #	Finish
SSSPIGOTADJ	S
SSSPIGOTADJB	B
SSSPIGOTAGB	GB

Fastener Options

(Sold Separately. See Pg 203-207)
Refer to engineering for Fastener sizing.

For Wood:



- 1/2" Lag Bolt

Thru-Bolt:



- SSSPIGOTBOLT

For Concrete:



- 1/2" or M12 Wedge Anchors.



- 1/2" or M12 Threaded Rod with Nut, Washer and Epoxy.



Scan for more info and
installation procedure.
Inquire about engineering.



Top Mount Spigot

Center Concealed Mounting Model



Duplex
2205
Stainless
Steel

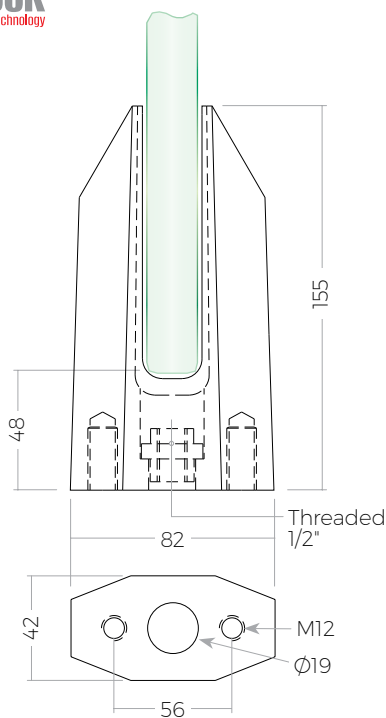
Pressure
Plate
Model

Suitable for
12-17.52mm
Glass

No Cover
Plate
Required

Adjust Outward
Tightening
Screws

Adjust Inward
Tightening
Screws



Bottom View

SPIGOT PART #	Finish
SSSPIGOTADJN	S

Fastening Kit

(Sold Separately)



Part # SSSPIGOTADJP

2 Stainless Steel M16 x 170mm
Threaded Rod & M16 Nut secured by
Epoxy for concrete or as a Thru-Bolt.

Fastener Options

(Sold Separately)

For Wood:



- 1/2" Threaded Rod with Nut and Washer used as a Thru-Bolt.

For Concrete:



- 1/2" or M12 Wedge Anchors.

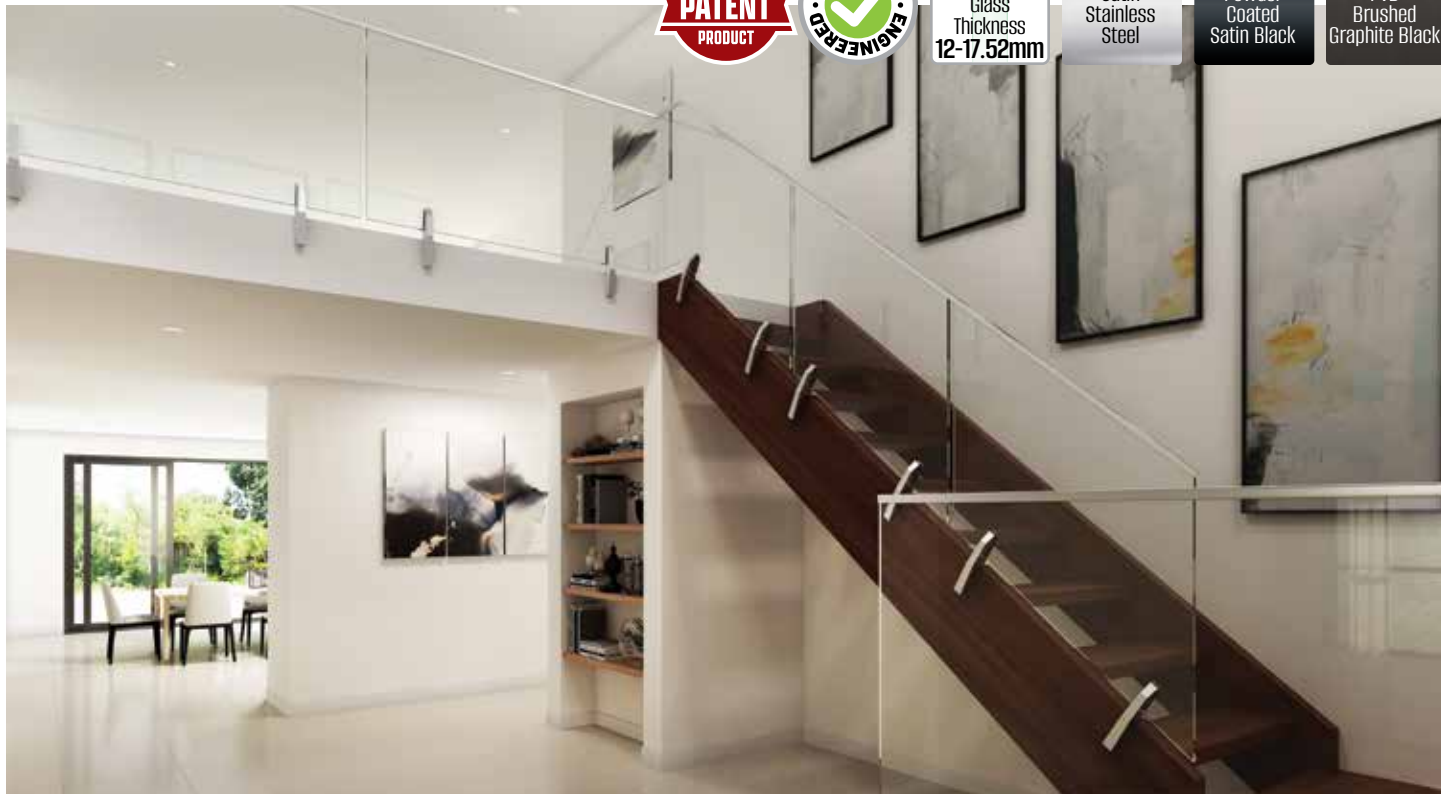



- 1/2" or M2 Threaded Rod with Nut, Washer and Epoxy.



Scan for more info and
installation procedure.
Inquire about engineering.

Adjustable Spigots



Edge Mount Spigot



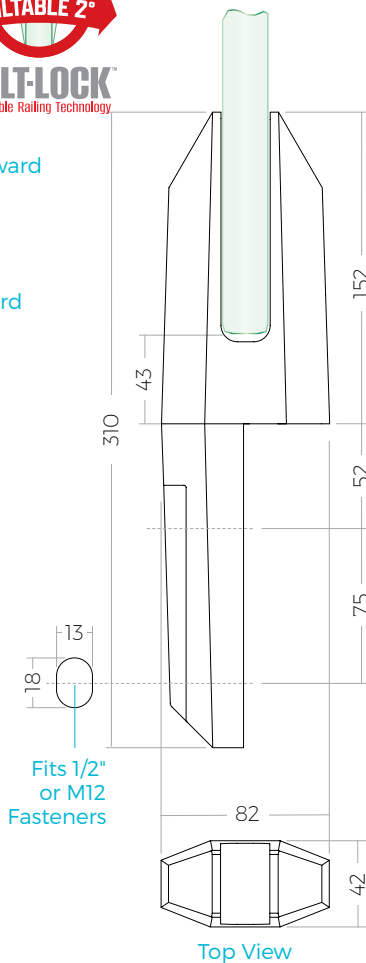
Duplex
2205
Stainless
Steel

Suitable
for
12-17.52mm
Glass

Pressure
Plate
Model

Adjust Outward
Tightening
Screws

Adjust Inward
Tightening
Screws



SPIGOT PART #	Finish
SSSPIGOTEDGE	S
SSSPIGOTEDB	B
SSSPIGOTEGB	GB

Fastener Options

(Sold Separately. See Pg 203-207)

Refer to engineering for Fastener sizing.

For Wood:



- 1/2" Lag Bolt

Thru-Bolt:



- **SSSPIGOTBOLT**

For Concrete:



- 1/2" or M12 Wedge Anchors.



- 1/2" or M12 Threaded Rod with Nut, Washer and Epoxy.



Scan for more info and
installation procedure.
Inquire about engineering.



Side Mount Spigot



Duplex 2205
Stainless
Steel



Adjust
Outward
Tightening
Screws

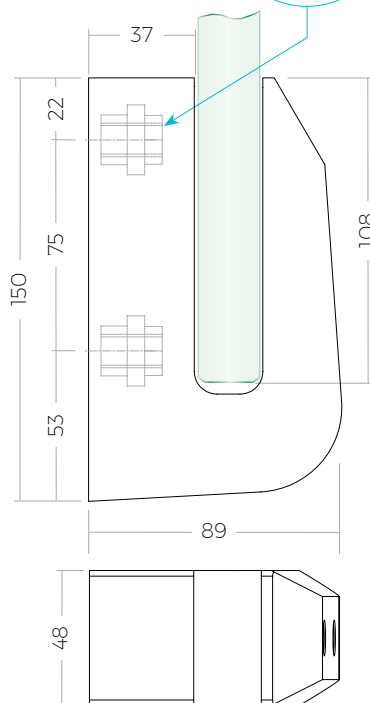
Adjust
Inward
Tightening
Screws

Suitable for
12-17.52mm
Glass

Pressure
Plate
Model

Custom
Socket Tool
SSSPIGOTSIDT
Available

(2 pcs)
1/2" Threaded
Custom
Fasteners
Included



Top View

SPIGOT PART #	Finish
SSSPIGOTSIDE	S
SSSPIGOTSIDB	B
SSSPIGOTSIGB	GB

1/2" Threaded Custom Fastener (2 pcs. Included)



Fastener Options

(Sold Separately - See pg 203-207)

Refer to engineering for Fastener sizing.

For Wood:



- 1/2" Hanger Bolt, or Thru-Bolt.

For Concrete:



- 1/2" Wedge Anchors.



- 1/2" or M2 Threaded Rod with Nut, Washer and Epoxy.





Scan for more info and
installation procedure.
Inquire about engineering.

Standard Spigots



PHOTO: Millan Glass & Mirror

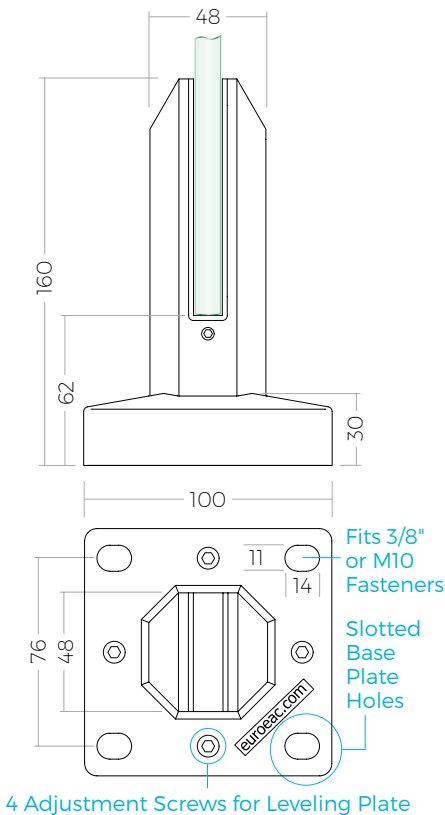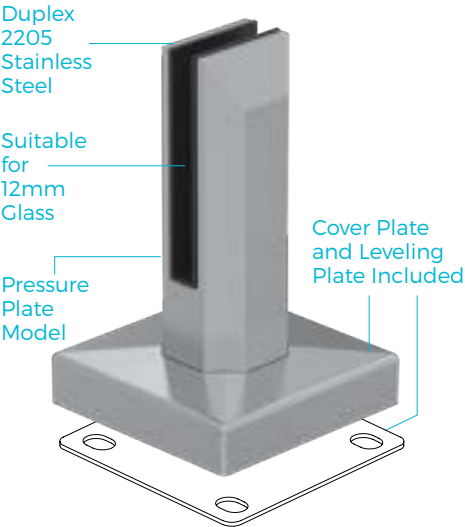6" Standard Top Mount Spigot



SPIGOT PART #	Finish
SSSPIGOTS6S	S
SSSPIGOTS6B	B
SSSPIGOTS6GB	GB
SSSPIGOTS6G	G

Fastener Options

(Sold Separately. See Pg 203-207)
Choose according to your needs.
Refer to engineering for Fastener sizing.

For Wood:



- 3/8" Lag Bolt

For Concrete:



- 3/8" or M10 Wedge Anchors.



- 3/8" or M10 Threaded Rod with Nut, Washer and Epoxy.




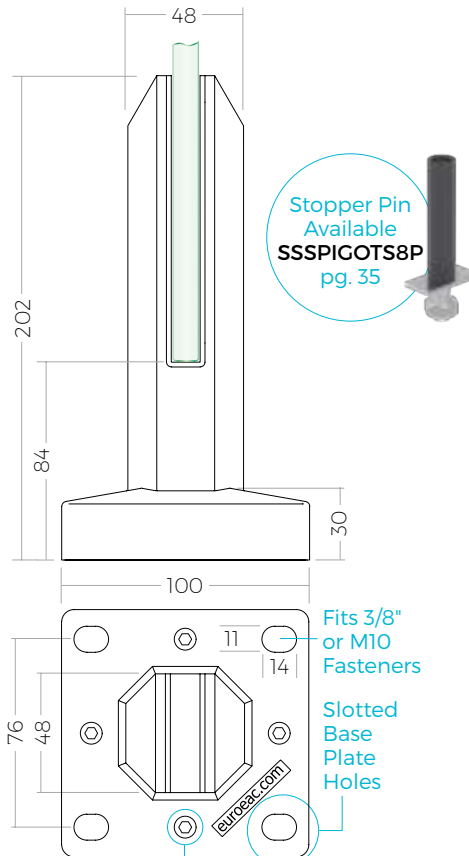
Scan for more info and installation procedure.
Inquire about engineering.



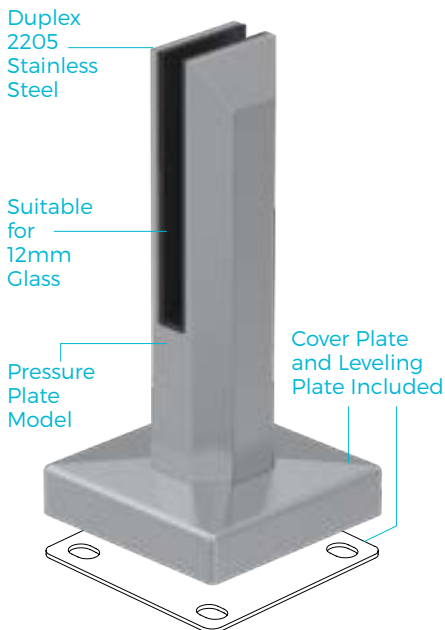PHOTO: Millan Glass



8 Standard Top Mount Spigot



4 Adjustment Screws for Leveling Plate

SPIGOT PART #	Finish
SSSPICOTS8S	S
SSSPICOTS8B	B
SSSPICOTS8GB	GB
SSSPICOTS8G	G

Fastener Options

(Sold Separately. See Pg 203-207)

Choose according to your needs. Refer to engineering for Fastener sizing.

For Wood:



- 3/8" Lag Bolt

For Concrete:



- 3/8" or M10 Wedge Anchors.



- 3/8" or M10 Threaded Rod with Nut, Washer and Epoxy.



Scan for more info and installation procedure. Inquire about engineering.



SSSPIGOTS8P

-
- Technical drawing of the SSSPIGOTS8P glass-to-glass connector. The drawing includes a perspective view on the left and a detailed cross-sectional view on the right. The perspective view shows a black cylindrical connector with a base plate. The cross-sectional view shows the connector installed between two glass panes. Key dimensions include: a top diameter of $\varnothing 13$, a total height of 61, a top flange width of 16, a central shaft diameter of ± 6 , a central shaft length of 48, a base plate thickness of 84, a base plate width of 127, and a total width of 279. The glass panes are labeled "Glass Edge" and "Glass Edge". The connector is labeled "Steps Surface".



NOTE: Install the STOPPER PIN before securing the Spigot to the floor. There is a possibility to adjust the STOPPER PIN up to a max of ± 6 mm sideways without removing the Spigot.





PHOTO: Vitrerie Pros

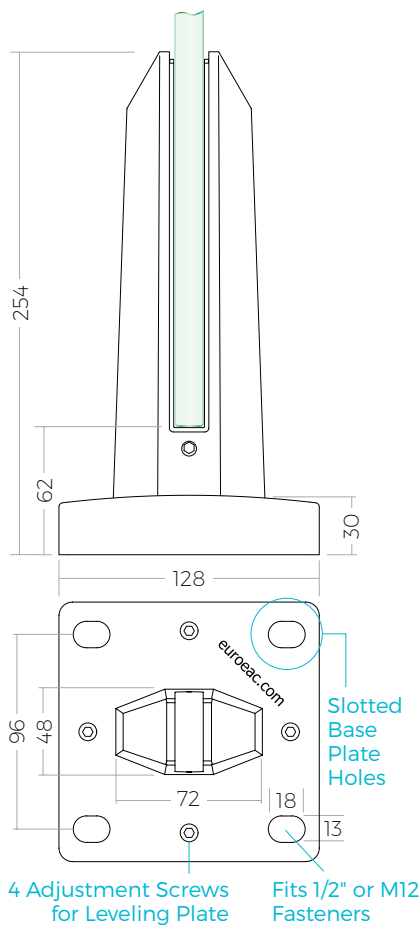10" Standard Top Mount Spigot



SPIGOT PART #	Finish
SSSPIGOT10S	S
SSSPIGOT10B	B
SSSPIGOT10GB	GB

Fastener Options

(Sold Separately. See Pg 203-207)

Choose according to your needs.
Refer to engineering for Fastener sizing.

For Wood:



- 1/2" Lag Bolt

For Concrete:



- 1/2" or M12 Wedge Anchors.



- 1/2" or M12 Threaded Rod with Nut, Washer and Epoxy.



Scan for more info and installation procedure.
Inquire about engineering.

Standoffs





T3 Adjustable Lockable Standoffs with Tilt-Lock™ Adjustability

Our Adjustable Glass Standoffs are equipped with our exclusive **Tilt-Lock™** Adjustable technology allowing easy and precise vertical alignment of glass panels. After the glass panel is set in place, it can be vertically aligned from the front using our Adjustable Standoff Tool by tightening or loosening the Telescope portion of the standoff.

Our Adjustable Glass Standoffs are available in 1 1/2" and 2" diameters in various lengths. All sizes are available in **Satin (S)**, with some sizes also available in **Powder Coated Satin Black (B)**, **PVD Brushed Graphite Black (GB)**, and **PVD Brushed Gold (G)** finishes. These standoffs feature an internal locking mechanism with a clean design that conceals the threads in the spacer.

- **NEW** increased range of glass sizes from 3/8" - 7/8", suitable for commercial and residential projects.
- **Locking System** secures standoff in adjusted position, preventing misalignment once the cap is assembled. See page 42.
- **Tilt-Lock™ Adjustability** enables a tilt range of **+/-3°** for glass railings, while our **T3** slotted model's slot hole offers both vertical and horizontal adjustment, allowing for complete **3D** adjustability.
- **Duplex 2205** Ultra Marine Grade Stainless Steel, solid material.
- **Designed by EURO** and fully engineered for the National Building Code of Canada.
- Cap and Threaded Rod come as one cast piece for superior strength.
- **Patented in Canada (313 8408), and U.S. (118 41043).**

Standard Glass Standoffs

Our popular **Standard** Glass Standoffs are made of high-quality 316-Grade Stainless Steel and are available Round or Square to suit your design needs. They are finished in **Satin** with most sizes offering **PVD Brushed Graphite Black** and **Powder Coated Satin Black**.

Features

- 316-Grade Stainless Steel, solid material.
- 3/8"-16 Imperial threaded and is available in 3 finishes: **Satin**, **PVD Brushed Graphite Black**, and **SS304 Powder Coated Satin Black**.
- The Spacer design has a short lip to provide a smooth surface for Glass to be held in place for installation.
- Imperial fasteners are available. For Threaded Rods and Hanger Bolts, use 3/8"-16 Thread size.



T3 Lockable Adjustable Glass Standoffs




**NEW
PRODUCT**




T3T Tapped Round

Our **T3T Tapped Series** Adjustable Glass Standoffs with **Tilt-Lock™ Technology**, features a revised tapped thread for simpler and affordable fastening options.



1 1/2" Diameter

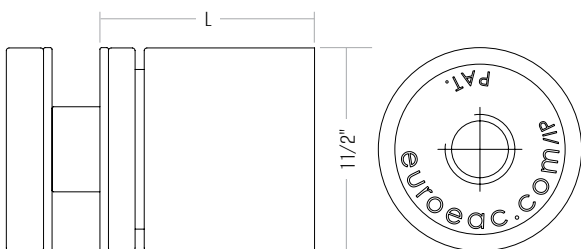Accommodates **10-16mm** Glass.
Recommended Glass Hole size 3/4".
Recommended Fastener 1/2".



PART #	L (Min - Max Length)	Glass Size	Finish
SSJ12112T	1 1/2" - 1 3/4"	10-16	S/B
SSJ1222T	2" - 2 3/8"	10-16	S/B



Socket Tool

Achieve quick, one-step installation for our T3T Standoffs by utilizing our dedicated Socket tool **HBDS34**.
Sold Separately.



Lock into place with **SSJT1** Adjustable Standoff Tool.
Sold separately.

Application & Fastening Options

Concrete Application

1 1/2" Diameter


Fastening Option A: Threaded Rod with Epoxy

SSKF121	SS threaded rods 1/2" x 5"
FR5-10MX	FLO-ROK® epoxy (Fills 28 holes 9/16" x 4 1/2")

Fastening Option B: Wedge Anchors

ISS12334	SS wedge anchor 1/2" x 3 3/4"
ISS12412	SS wedge anchor 1/2" x 4 1/2"


NOTE 1: Length of threaded rods or wedge anchors should protrude 3/8" from the surface.




Wood Application

1 1/2" Diameter

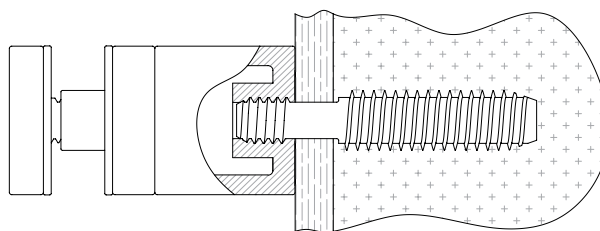1/2" SS EURO Hanger Bolts




SSASHANG212S
Exposed Wood



SSASHANG314S
Drywall



NOTE 2: Regular 1/2" hanger bolts or 1/2" threaded rods fit in T3T Standoffs based on application by installers. Pilot hole for Euro hanger bolts: Softwood: 1/2" · Hardwood: 37/64"



T3 Slotted Round

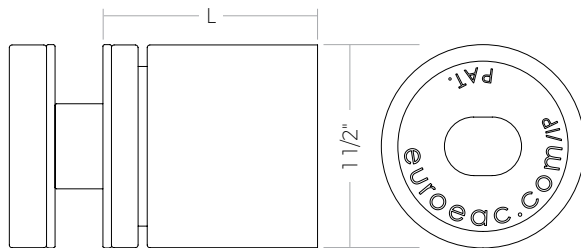


T3 Slotted Square




1 1/2" Diameter

Accommodates **10-16mm** Glass.
Recommended Glass Hole size 3/4".
Recommended Fastener M10 or 3/8". Pg 46.



1 1/2" Diameter

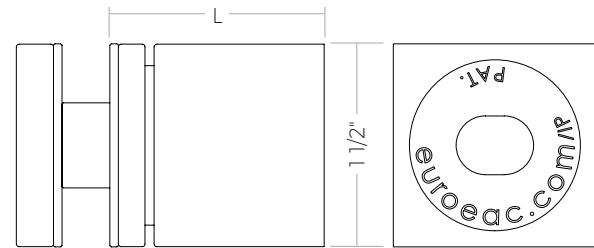Accommodates **10-16mm** Glass.
Recommended Glass Hole size 3/4".
Recommended Fastener M10 or 3/8". Pg 46.




PART #	L (Min - Max Length)	Glass Size	Finish
SSJ12114	1 1/4" - 1 1/2"	10-16mm	S
SSJ12112	1 1/2" - 1 3/4"	10-16mm	S / B / GB / G
SSJ122	2" - 2 3/8"	10-16mm	S / B / GB

PART #	L (Min - Max Length)	Glass Size	Finish
SSJQ112	1 1/2" - 1 3/4"	10-16mm	S / B / GB / G



2" Diameter

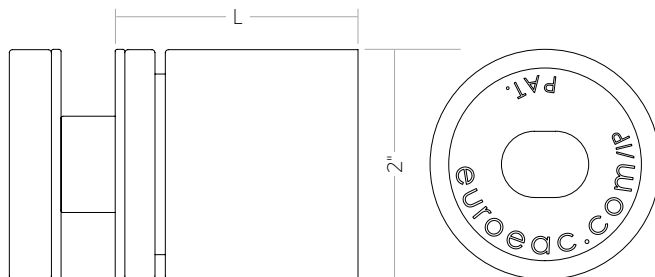Accommodates **12-22mm** Glass.
Recommended Glass Hole size 1".
Recommended Fastener M12 or 1/2". Pg 46.



PART #	L (Min - Max Length)	Glass Size	Finish
SSJ2112	1 1/2" - 1 3/4"	12-19mm	S / B / GB / G
SSJ22	2" - 2 3/8"	12-22mm	S / B / GB



Application & Fasteners for T3 Slotted Standoffs

Concrete Application

Threaded Rods with Epoxy or Wedge Anchors are two options to install Standoffs on Concrete.

1 1/2" Dia. Standoffs

Option A: Threaded Rod with Epoxy.

SSKF381 - SS Threaded Rod 3/8" x 5".

SSNUT3816 - SS Nut 3/8"-16.

PWS38VP - SS Flat Washer 3/8".

FR5-10MX - FLO-ROK® Epoxy (Fills 39 holes 7/16" x 4 1/2").

Option B: Wedge Anchor.

ISS38334 - SS Wedge Anchor 3/8" x 3 3/4".

2" Dia. Standoffs:

Option A: Threaded Rod with Epoxy.

SSKF121 - SS Threaded Rods 1/2" x 5".

SSNUT1213 - SS Nut 1/2"-13.

PWS12CT - SS Flat Washer 1/2".

FR5-10MX - FLO-ROK® Epoxy (Fills 28 holes 9/16" x 4 1/2").


Option B: Wedge Anchors

ISS12334 - SS Wedge Anchor 1/2" x 3 3/4".

ISS12412 - SS Wedge Anchor 1/2" x 4 1/2".

NOTE 3: Make sure the length of the Threaded Rods or Wedge Anchors protruding from the surface matches size "L" shown in the chart below:

PART #	L
SSJ112114	9/16"
SSJ112112	5/8"
SSJ1122	3/4"
SSJQ112	3/4"
SSJ2112	3/4"
SSJ22	3/4"

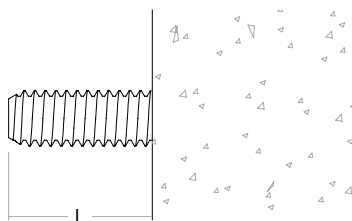


Wood Application


When installed, our Wood Fasteners transfer the load to the Wood structure without compressing the surface material such as Drywall or Siding.

1 1/2" Dia. Standoffs

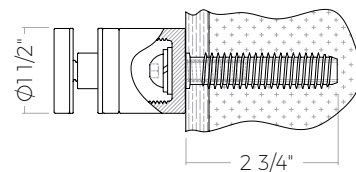Standoffs are secured to wood insert by using the 3/8" machine screws below.



For **SSJ112114**




Use **SSFLPK1**
SS Screw 3/8" x 1 1/4"

For **SSJ112112**




Use **SSFLPK2**
SS Screw 3/8" x 1 1/4"

For **SSJ1122**
or **SSJQ112**



Use **SSFLPK3**
SS Screw 3/8" x 1 1/4"

Use all 3 screws in conjunction with




SSKFW38234

SS Wood Insert

See Pg 46
for more options


2" Dia. Standoffs

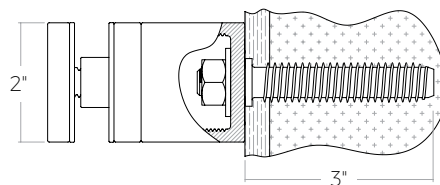SS Hanger Bolt sets are used to secure the Standoffs.



For **SSJ2112** or **SSJ22**

Use **SSJHB124SS** SS Hanger Bolt Set.



NOTE 4: Pilot hole for wood insert and hanger bolt set: Softwood: 1/2" · Hardwood: 3/7/64". When installed, our wood fasteners transfer the load to the wood structure without compressing the surface material such as drywall or siding.

Note 5: Using wood inserts eliminates compression on the surface and prevents cracks on drywall.



PHOTO: Trueline Moulding Group Inc.



Adjustable Standoff Tool

Part # **SSJT1**

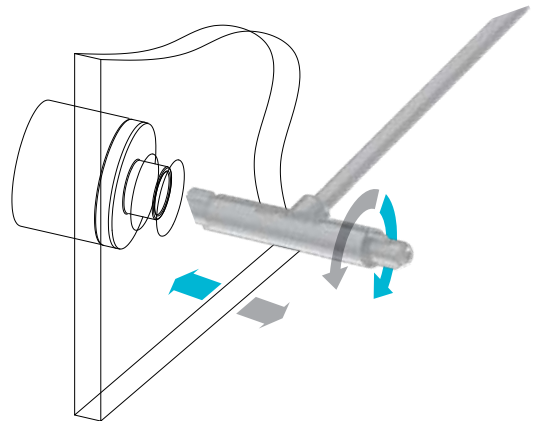
This Tool is designed by **EURO** to facilitate adjustments of our Adjustable Glass Standoffs. The 2 rounded ends are for adjusting 1 1/2" and 2" diameters respectively. The Allen key is used to lock and secure the standoffs in place. Sold Separately.

3D Adjustability (T3 models only)



1. Adjust horizontally side to side and vertically up and down.




2. Adjust forward or background to allow a $\pm 3^\circ$ adjustment



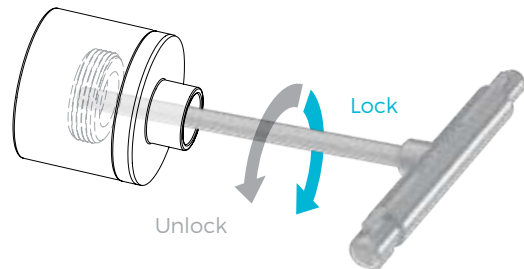3. Lock into place.




More standoffs
online



T3 installation
video

Please direct questions to:
engineering@euroeac.com

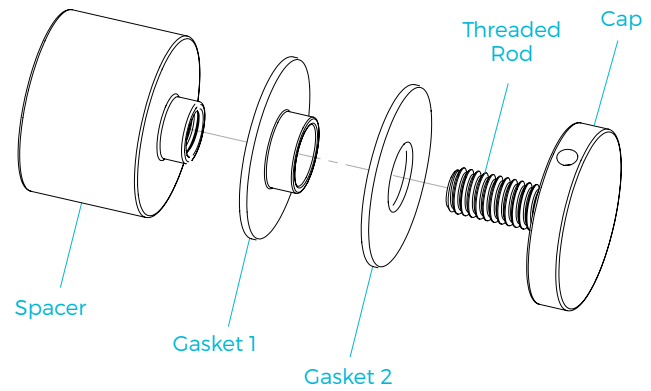Follow the fastener recommendations on page 41 in order to activate the lock properly.



- 316-Grade Stainless Steel, solid material.
- Includes Imperial Thread and is available in 3 finishes: Satin, PVD Brushed Graphite Black, and SS304 Powder Coated Satin Black.
- The Spacer design has a short lip to provide a smooth surface for Glass to be held in place for installation.
- Imperial Fastening options are available. For Threaded Rods and Hanger Bolts, use the same Thread size as the Spacer.



PHOTO: Venetian Iron Design


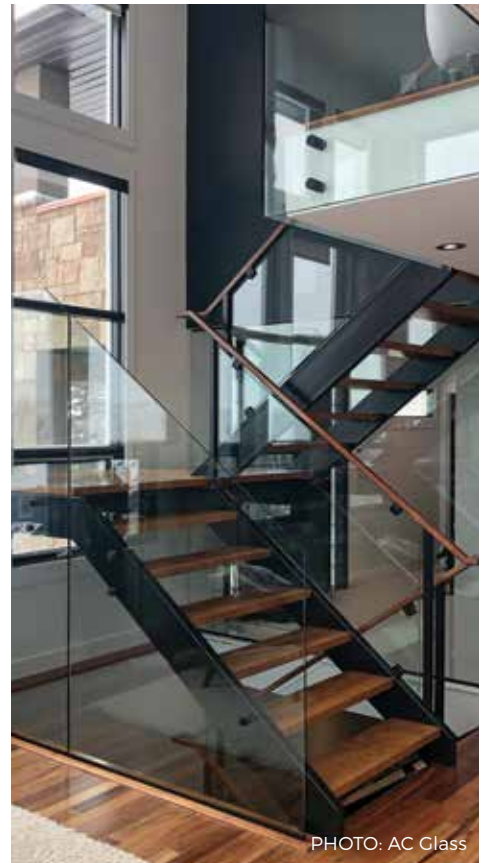


PHOTO: AC Glass

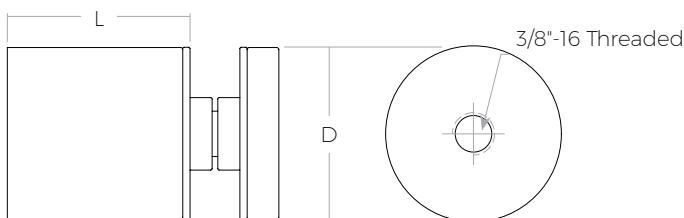

INCLUDES: Gasket (2 pcs) & 3/8-16" x 1 1/8" Threaded Rod for 10-13.52mm Glass (1 pc).


Caps

PART #	Thread (UNC)	SS Grade	Finish
1 1/4" Diameter			
SSKCAP1146S	5/16"	316	S
1 1/2" Diameter			
SSKCAP1126S	3/8"	316	S
SSKCAP1124B	3/8"	304	B
SSKCAP1126GB	3/8"	316	GB
2" Diameter			
SSKCAP26S	3/8"	316	S
SSKCAP24B	3/8"	304	B
SSKCAP26GB	3/8"	316	GB



Threaded Rods for Caps

PART #	Thread (UNC)	Length	Glass Size
SSKF384	3/8"	1 1/8"	10-13.52
SSKF383	3/8"	1 9/16"	15-19



Gaskets (2 pcs)

PART #	D (Diameter)	Finish
SSKCAP114GAS	1 1/4"	Clear Plastic
SSKCAP112GAS	1 1/2"	Clear Plastic
SSKCAP2GAS	2"	Clear Plastic
SSKCAP112GAX	1 1/2"	Black Plastic
SSKCAP2GAX	2"	Black Plastic



Spacers

1 1/4" Diameter

Recommended Glass Hole size 5/8".

Recommended Fastener 5/16".

PART #	L (Length)	Thread (UNC)	SS Grade	Finish
SSK114126S	1/2"	5/16"	316	S

1 1/2" Diameter

Recommended Glass Hole size 3/4".

Recommended Fastener 3/8".

PART #	L (Length)	Thread (UNC)	SS Grade	Finish
SSK112126S	1/2"	3/8"	316	S
SSK112346S	3/4"	3/8"	316	S
SSK112344B	3/4"	3/8"	304	B
SSK11216S	1"	3/8"	316	S
SSK11214B	1"	3/8"	304	B
SSK11216GB	1"	3/8"	316	GB
SSK1121146S	1 1/4"	3/8"	316	S
SSK1121126S	1 1/2"	3/8"	316	S
SSK1121124B	1 1/2"	3/8"	304	B
SSK1121126GB	1 1/2"	3/8"	316	GB
SSK1121346S	1 3/4"	3/8"	316	S
SSK11226S	2"	3/8"	316	S
SSK11224B	2"	3/8"	304	B
SSK11226GB	2"	3/8"	316	GB



2" Diameter

Recommended Glass Hole size 3/4".

Recommended Fastener 3/8".

PART #	L (Length)	THREAD (UNC)	SS Grade	Finish
SSK2126S	1/2"	3/8"	316	S
SSK2346S	3/4"	3/8"	316	S
SSK2344B	3/4"	3/8"	304	B NEW
SSK216S	1"	3/8"	316	S
SSK214B	1"	3/8"	304	B
SSK216GB	1"	3/8"	316	GB
SSK21146S	1 1/4"	3/8"	316	S
SSK21126S	1 1/2"	3/8"	316	S
SSK21124B	1 1/2"	3/8"	304	B
SSK21126GB	1 1/2"	3/8"	316	GB
SSK21346S	1 3/4"	3/8"	316	S
SSK226S	2"	3/8"	316	S
SSK224B	2"	3/8"	304	B
SSK226GB	2"	3/8"	316	GB

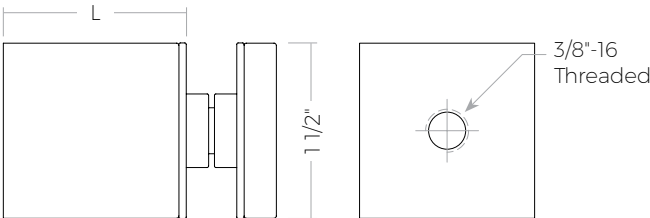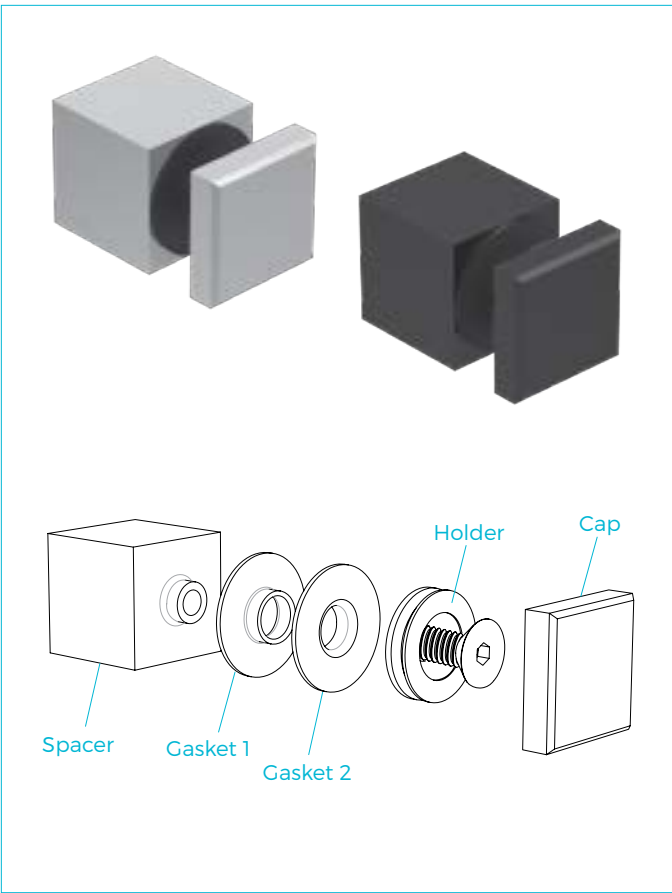Square Standard Glass Standoffs



Cap, Spacer, and Gaskets included.

1 1/2" Square

Recommended Glass Hole size 3/4".

Recommended Fastener 3/8".

PART #	L (Length)	Thread (UNC)	SS Grade	Finish
SSK112SQR	1 1/2"	3/8"	316	S
SSK112SQRB	1 1/2"	3/8"	304	B
SSK112SQRGB	1 1/2"	3/8"	316	GB



PHOTO: Bloor Railing




PHOTO: Bloor Railing

Fastening Options & Essentials

The following Fastening options and essentials are available for our Adjustable and Standard Glass Standoffs. All items are sold separately and are not included with the Standoffs.

Threaded Rods

PART #	Thread (UNC)	L (Length)
SSKF5161	5/16"	4"
SSKF384	3/8"	1 1/8"
SSKF383	3/8"	1 9/16"
SSKF382	3/8"	3 9/16"
SSKF381	3/8"	5"
SSKF121	1/2"	5"



Hanger Bolts

PART #	Thread (UNC)	L (Length)
SSKFHB5161	5/16"	3"
SSKFHB38212	3/8"	2 1/2"
SSKFHB38314	3/8"	3 1/4"
SSKFHBI3835	3/8"	3 1/2"
SSKFHBI384	3/8"	4"
SSKFHB384	3/8"	4"
SSASHANG212S	1/2"	2 1/2"
SSASHANG314S	1/2"	3 1/4"
HZ38212VP	3/8"	2 1/2"
HZ38312VP	3/8"	3 1/2"
HZ383VP	3/8"	3"
HZ384VP	3/8"	4"




Wood Insert

PART #	Thread (UNC)	L (Length)
SSKFW382	3/8"	2"
SSKFW38234	3/8"	2 3/4"
SSKFW38112	3/8"	1 1/2"



Essentials

PART #	Description
1. SSSPANNER1	Spanner for 3/4"-2" Diameter (Small).
2. SSSPANNER2	Spanner for 1 1/4"-3" Diameter (Large).
3. SSSPANNER3	Spanner Kit for 1 1/2" and 2" Standoff Caps. Includes: 2 Standoff Cap Covers with Plastic Liner, 1 Ratchet Spanner, and 1 Allen Key.
4. SSSPANNER4 	Spanner for 1.5" & 2" Diameter Standoffs.
5. FR5-10MX	FLO-ROK® FR5 MAX 10 oz. Injection Anchoring Adhesive/Epoxy.
6. PA100	FLO-ROK® FR5 MAX 10 oz. Manual Dispensing Tool.



Mini Posts with TVLT-LOCK™

Adjustable Railing Technology



PHOTO: Excel Enclosures & Railings

Mini Posts with Tilt-Lock™ Adjustable Standoffs



Features

- Engineered for Interior and Exterior Landing and Stairway applications. Refer to back inside cover for glass guard design information.
- Includes **EAC T3 Series Lockable Glass Standoffs with Tilt-Lock™ Technology**, equipped with a locking system to secure Standoff in an adjusted position, preventing misalignment once the Cap is assembled or disassembled.
- Adjustable Standoffs secure Glass Panels, providing tilt adjustability for Glass Panels by extending in length.
- EAC Mini Posts are available in 316-Grade Satin Stainless Steel and Brushed Black Anodized Aluminum. Accompanying Standoffs are made of solid Duplex-2205 Stainless Steel and are available in Satin and Powder Coated Satin Black finishes.
- Recommended hole size for Glass is 3/4".



Patented in Canada (313 8408), and U.S. (118 41043).

Top Mount

Recommended Fastener:

3/8" or M10 Lag Bolt for Wood.

3/8" or M10 Wedge Anchor for Concrete.



PHOTO: Custom Glass Railings



Side Mount

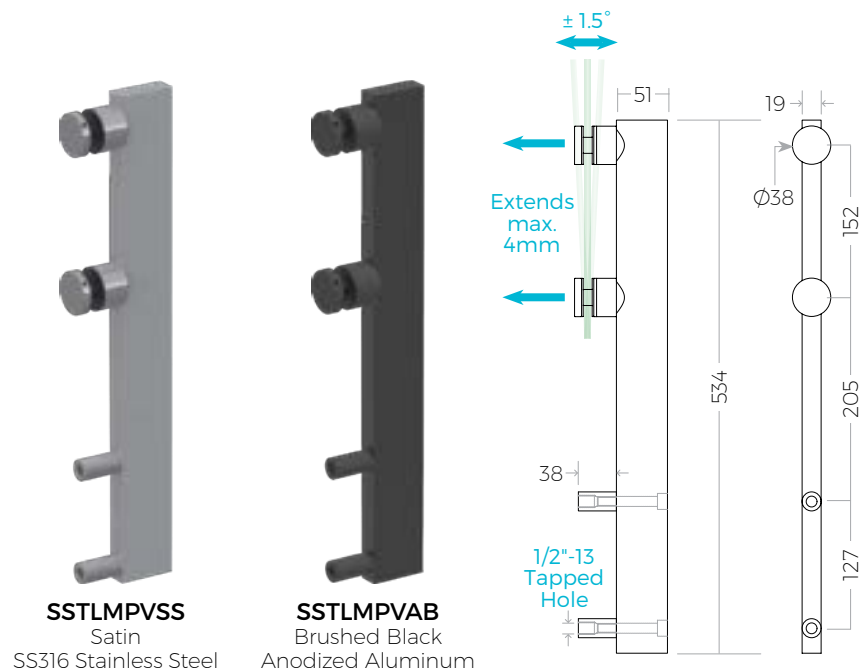
Recommended Fastener:

1/2" Hanger Bolt for Wood.

1/2" Threaded Rod with epoxy for Concrete.




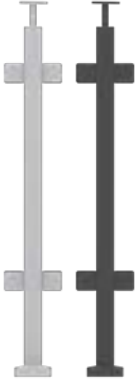
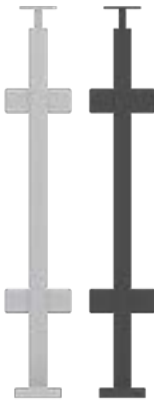
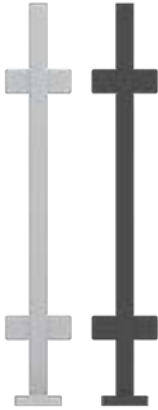














PHOTO: Excel Enclosures & Railings



Posts & Accessories



Posts and Accessories Overview

<div>  <div> <div>ElitePosts</div> <div>Prefabricated Posts</div> </div> </div>						
	 <div> <div>H1</div> <div>Handrail Series</div> </div>	 <div> <div>H2</div> <div>Handrail Series</div> </div>	 <div> <div>F1</div> <div>Frameless Series</div> </div>	 <div> <div>S1</div> <div>Sidemount Series</div> </div>	 <div> <div>Standard Blank / Rod* Posts</div> </div>	 <div> <div>Heavy Duty Posts</div> </div>
APPLICATION	INTERIOR Residential	EXTERIOR Residential	INTERIOR EXTERIOR Residential	INTERIOR EXTERIOR Residential	INTERIOR EXTERIOR Residential	INTERIOR EXTERIOR Commercial
MOUNT	Top	Top	Top	Side	Top	Top
SHAPE/SIZE	Square 40 x 40mm	Square 40 x 40mm	Square 40 x 40mm	Square 40 x 40mm	See Pg 71 & 72.	Round Ø50mm Square 50 x 50mm
MATERIAL & FINISH	SS304, Satin SS304, Satin Black	SS316, Satin SS304, Satin Black	SS316 - Satin SS304 - Satin Black	SS316 - Satin SS304 - Satin Black	SS316 - Satin	SS316 - Satin
HEIGHT & APPLICATION	915 (36") Landing / Stairs	915 (36") Landing / Stairs 1070 (42") Landing	915 (36") Landing / Stairs 1070 (42") Landing	915 (36") Landing / Stairs 1070 (42") Landing	915 (36") Landing / Stairs 1070 (42") Landing	1070 (42") Landing / Stairs
FEATURES	<ul style="list-style-type: none"> Seamless Top Cap. Welded Tube Support (Fixed/ Swivel). Small Glass Clips. 	<ul style="list-style-type: none"> Seamless Top Cap. Welded Tube Support (Fixed/ Swivel). Large Glass Clips. 	<ul style="list-style-type: none"> Seamless Top Cap. Large Glass Clips. 	<ul style="list-style-type: none"> Side Mount Post Support with Tilt-Lock™ Technology. Welded Tube Support (Fixed/ Swivel) Large Glass Clips 	<ul style="list-style-type: none"> Customizable Top Cap & Tube Support. Rod Holders.* 	<ul style="list-style-type: none"> Seamless Top Cap. Height Adjustable Tube Support. Suits Glass Clips, Arm Fittings, and Spiders.
TUBE WALL THICKNESS						
GLASS THICKNESS						Based on chosen Glass hardware
INSTALLATION	76 (3") Base. 5/16" Fasteners. 3/8" GRK.	100 (4") Base. 3/8" Fasteners.	100 (4") Base. 3/8" Fasteners.	Side Mount Support Sold Separately. 3/8" & 1/2" Fasteners.	See Page 71 & 72 for Base Sizes. 3/8" & 1/2" Fasteners.	125 (5") Base. 1/2" Fasteners.
BLANK POST OPTIONS	Available for Landing / Stairs.	Available for Landing / Stairs.	Available for Landing 42".	Available for Landing 42".	Blank Posts available. *Height does not apply to Rod Post.	Suits Core Mount without Base Plate. Base Plate & Cover sold separately.
PAGE	53	57	61	65	69	75

ElitePosts

PREFABRICATED STAINLESS STEEL SQUARE POSTS FOR GLASS RAILINGS



Our engineered **Elite Posts** are precision-crafted square posts designed for top-mounted and side-mounted glass railing applications. Constructed from robust SS304 Grade Stainless Steel in our Satin Black Finish and SS316 Grade Stainless Steel in our Satin Finish, they combine strength with timeless elegance. **Elite Posts** are available in three series: **H (Handrail Series)**, **F (Frameless Series)**, and **S (Sidemount Series)**.



All series' come pre-drilled and include glass clips for easy installation. The **H** and **F Series** feature a welded base plate and push-fit base plate cover, providing a durable and modern top-mounting solution. They incorporate fully welded tube supports, enabling a strong, seamless handrail integration. Our newly designed **S Series** introduces our innovative Side Mount Post Support with our **Exclusive Tilt-Lock™ Technology**, ensuring precise alignment and effortless side mounting. Ready to install, **Elite Posts** offer a streamlined and efficient solution for all railing applications.



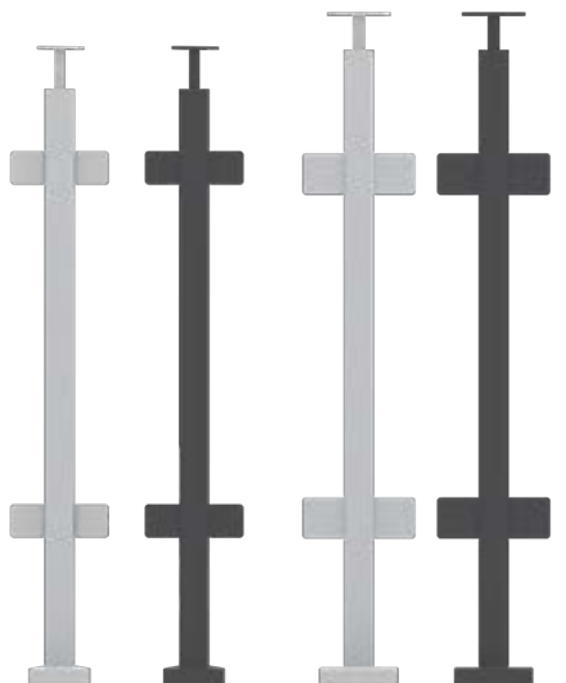
H
HANDRAIL
SERIES

H1

Interior Line

H2

Exterior Line



SS304 Satin (S) SS304 Satin Black (B) SS316 Satin (S) SS304 Satin Black (B)

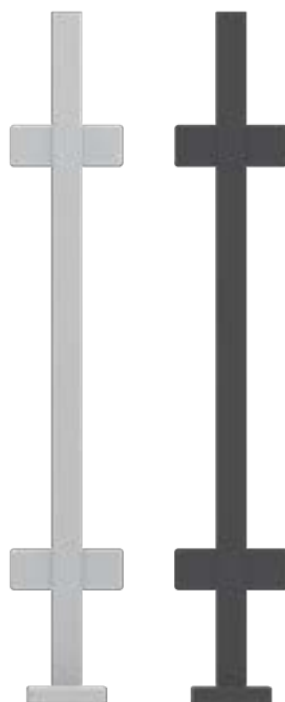
The **H (Handrail) Series** is comprised of the **H1 (Interior Line)** and **H2 (Exterior Line)**. The **H Series** is engineered and designed for today's clean aesthetics, and feature fully welded Tube Supports with a Solid Square Stem for a more durable and streamlined Handrail installation. (Handrail sold separately).



F
FRAMELESS
SERIES

F1

Interior / Exterior



SS316 Satin (S) SS304 Satin Black (B)

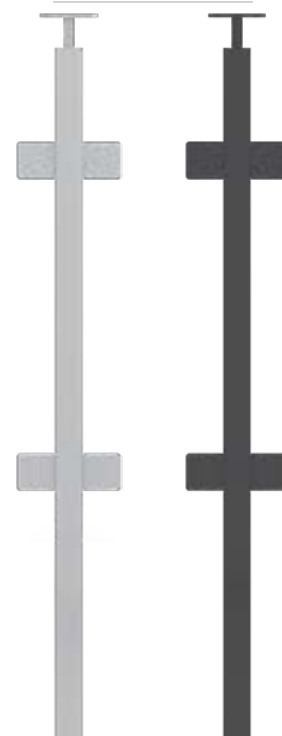
The **F (Frameless) Series** includes the **F1 Line** engineered and designed for both **Interior and Exterior** applications. It features Flat-top Posts with welded Top Caps for a railing-free sight line offering a contemporary sleek, minimalist look for an unobstructed view of your surroundings.



S
SIDEMOUNT
SERIES

S1

Interior / Exterior



SS316 Satin (S) SS304 Satin Black (B)



Introducing the **S (Sidemount) Series**, designed for **Interior and Exterior** use. It features our patented Sidemount Bracket with our exclusive **Tilt-Lock™** technology for level installations, the **S1 Line** offers fully welded tube supports with a square stem for a durable, modern solution. Its side mount design maximizes stair and balcony space while delivering a modern, timeless look.



H1

Handrail Interior Line






H1 Features

- Engineered for **Interior Residential** applications.
- Square tube size of **40x40x2mm (1.5"x1.5"x1/16")**.
- Material is SS304, in both Satin and Powder Coated Satin Black.
- Provides placement on the front, middle, and back of the tread for **36" (914mm)** high with installed Handrail.
- Fully welded Tube Support with a Solid Square Stem, with included Flat Handrail Attachment secured by an M6 Screw
- Fully welded 3" (76mm) solid cast Stainless Steel Base Plates with flat push-fit Base Plate Covers.
- Includes Small Square Glass Clips, M8x20 Stainless Steel Fasteners and flow-drilled and tapped holes in the Posts.
- Flat Handrail Attachment Plate and Base Plate Covers are also included.
- 10mm (3/8")** Gasket included. Additional Gaskets available.


	PART #	Description
1	SSPE36BPEF	Stair Bottom Post - Front.
2	SSPE36BPEM	Stair Bottom Post - Middle.
3	SSPE36BPEB	Stair Bottom Post - Back.
4	SSPE36STLF	Stair Line Post - Front.
5	SSPE36STLM	Stair Line Post - Middle.
6	SSPE36STLB	Stair Line Post - Back.
7	SSPE36STEF	Stair End Post - Front.
8	SSPE36STEM	Stair End Post - Middle.
9	SSPE36STEB	Stair End Post - Back.
10	SSPE36STBF	Stair Blank Post - Front.
11	SSPE36STBM	Stair Blank Post - Middle.
12	SSPE36STBB	Stair Blank Post - Back.
13	SSPE36LNDE	Landing End / Turn Post 36".
14	SSPE36LNDL	Landing Line Post 36".
15	SSPE36LNDC	Landing Corner Post.
16	SSPE36LNDB	Landing Blank Post.
17	SSPE42LNDE	Landing End Post 42".
18	SSPE42LNDL	Landing Line Post 42".
19	SSPE42LNDB	Blank Post 42".

H1 Components

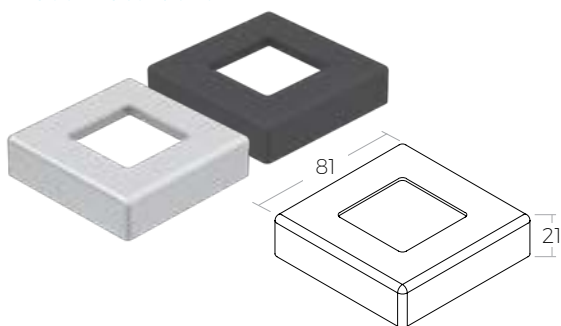
Base Plate Cover




Base Plate

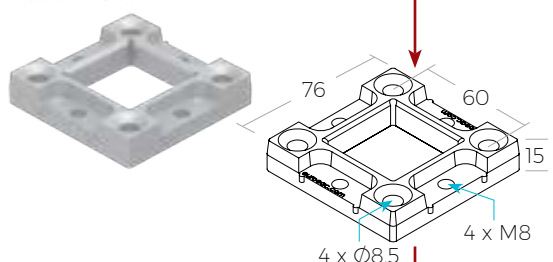

Leveling Plate NOT INCLUDED

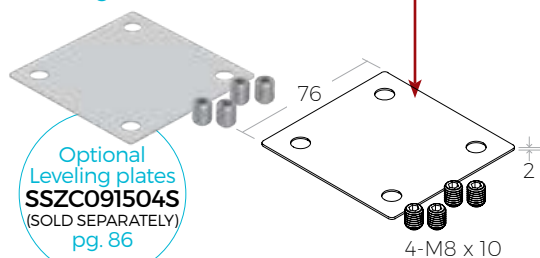


Glass Clip

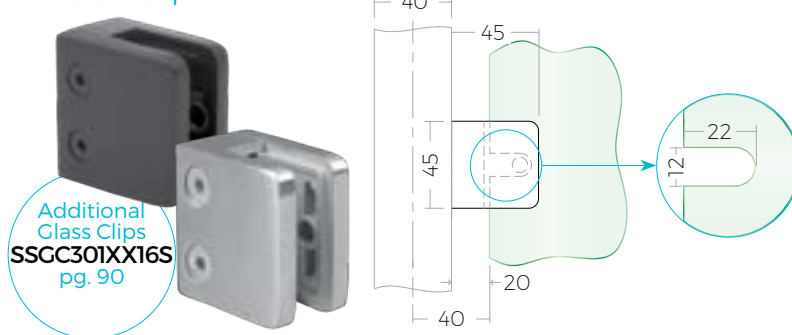


Tube Support



Fixed




Swivel



Compatible Saddles




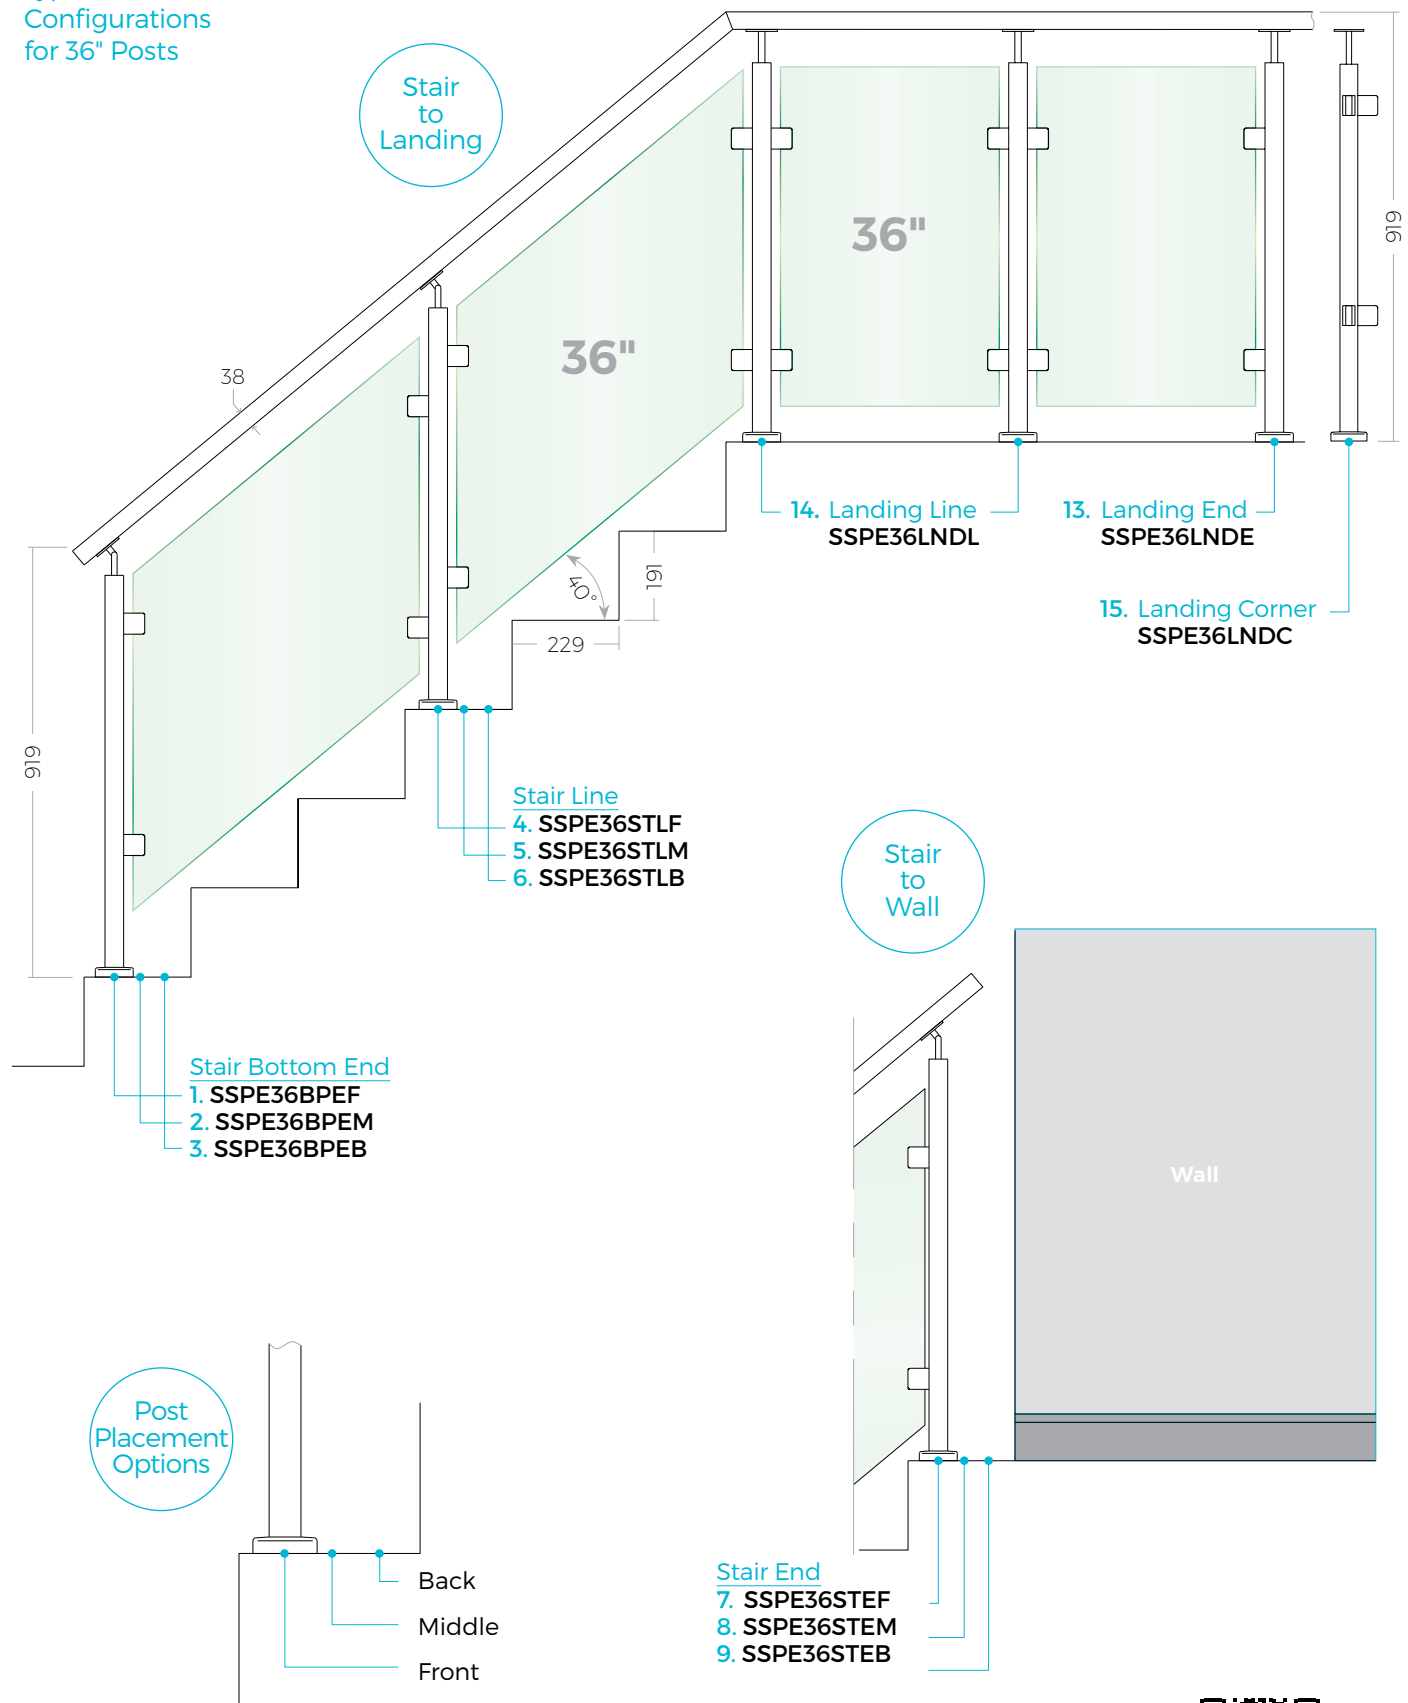Typical Stair Configurations for 36" Posts




Scan for
Imperial
Size
Drawings

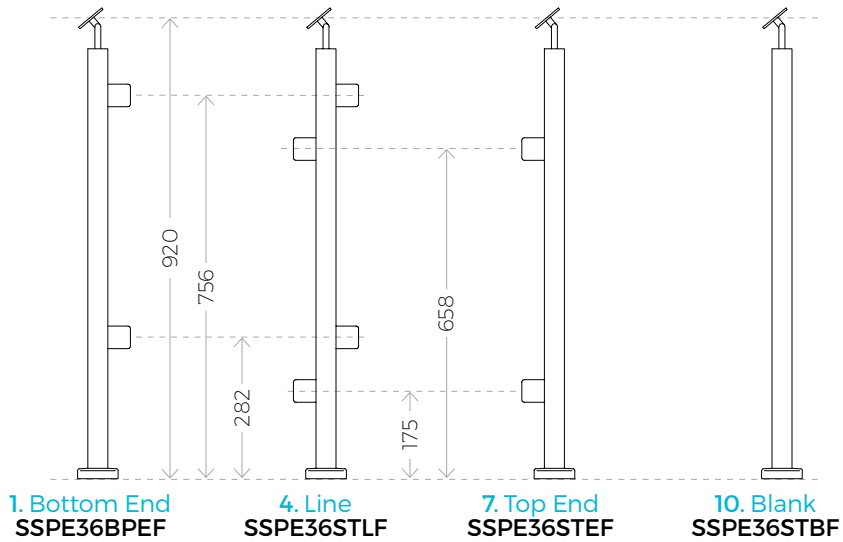
36" Posts for Stairs - Front Application




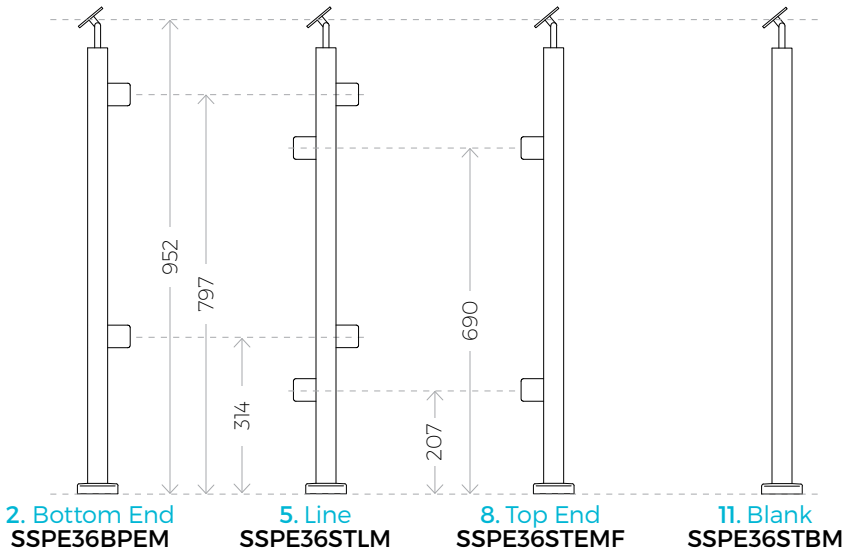
36" Posts for Stairs - Middle Application




36" Posts for Stairs - Back Application

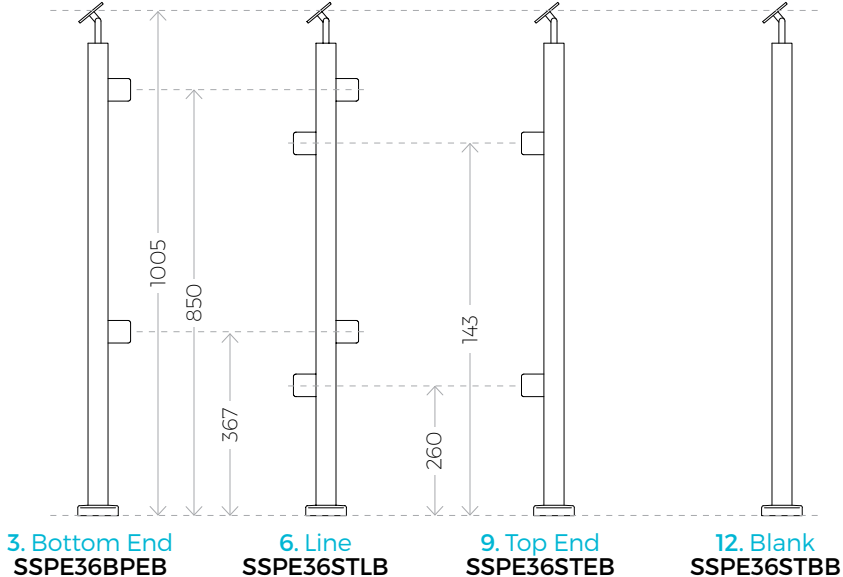

36" Posts for Landing

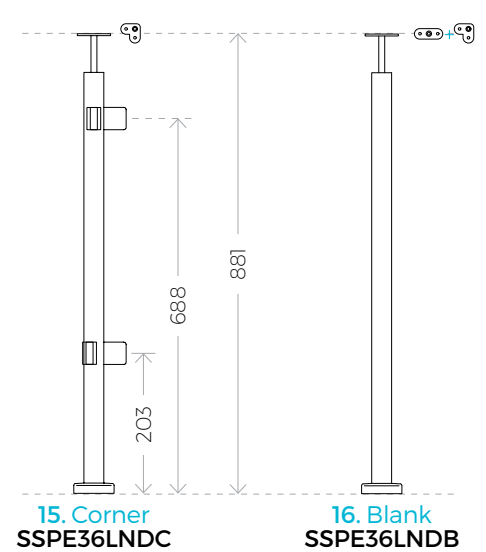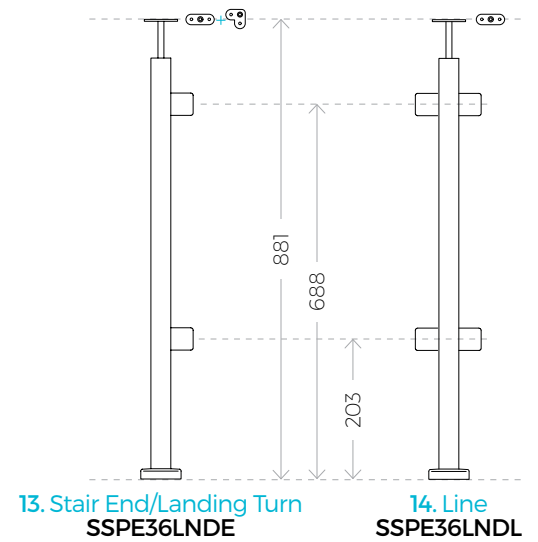

42" Posts for Landing

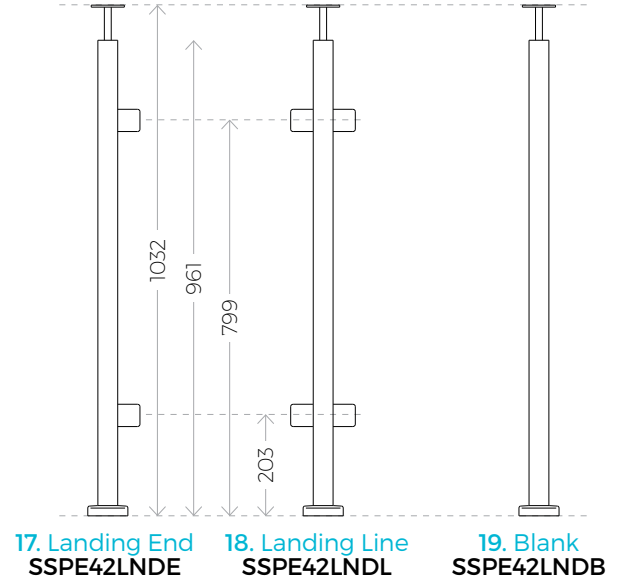




Handrail Exterior Line



H2 Handrail Exterior Line

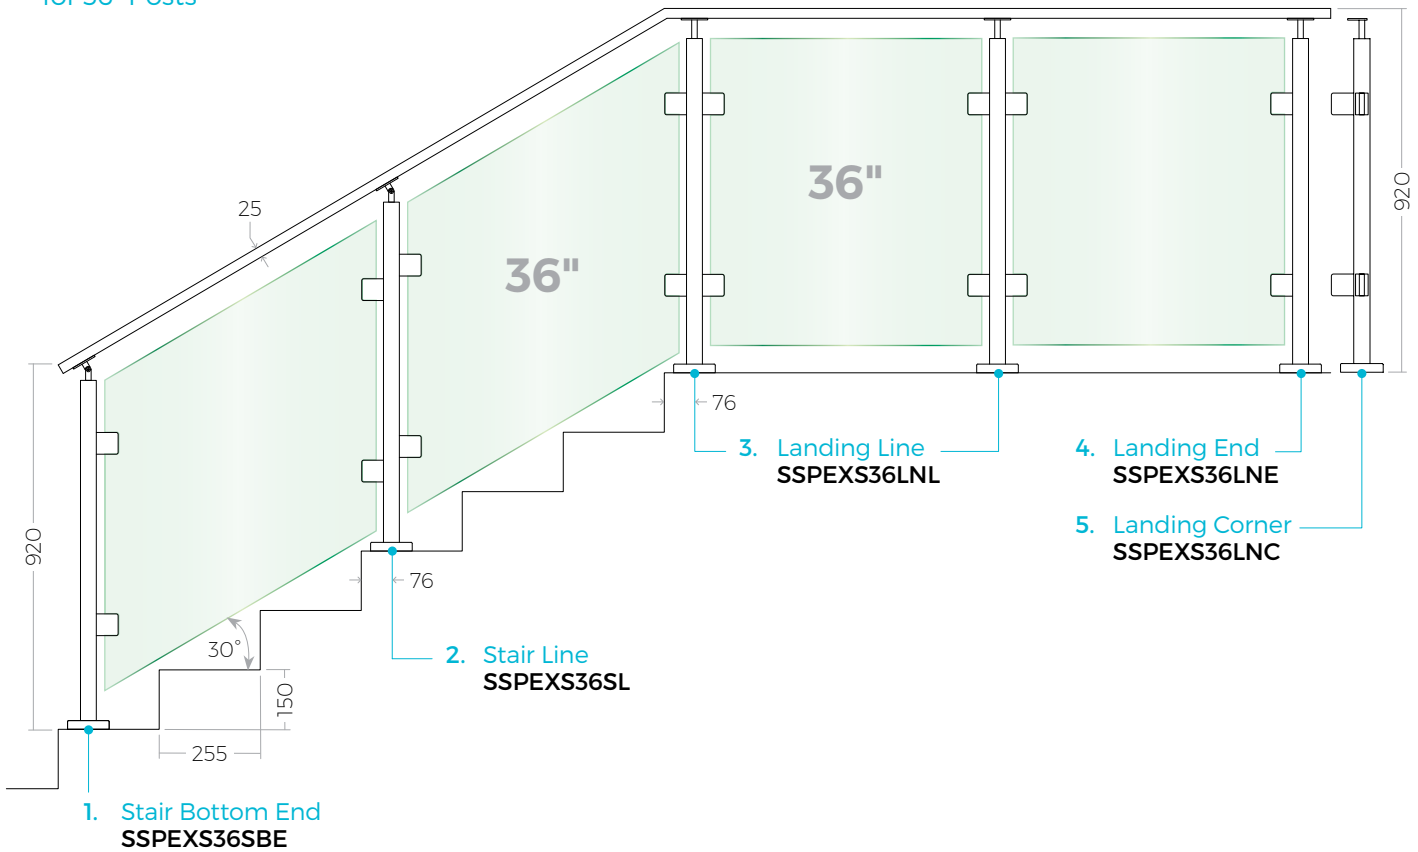
Typical Stair Configurations for 36" Posts




36" Posts



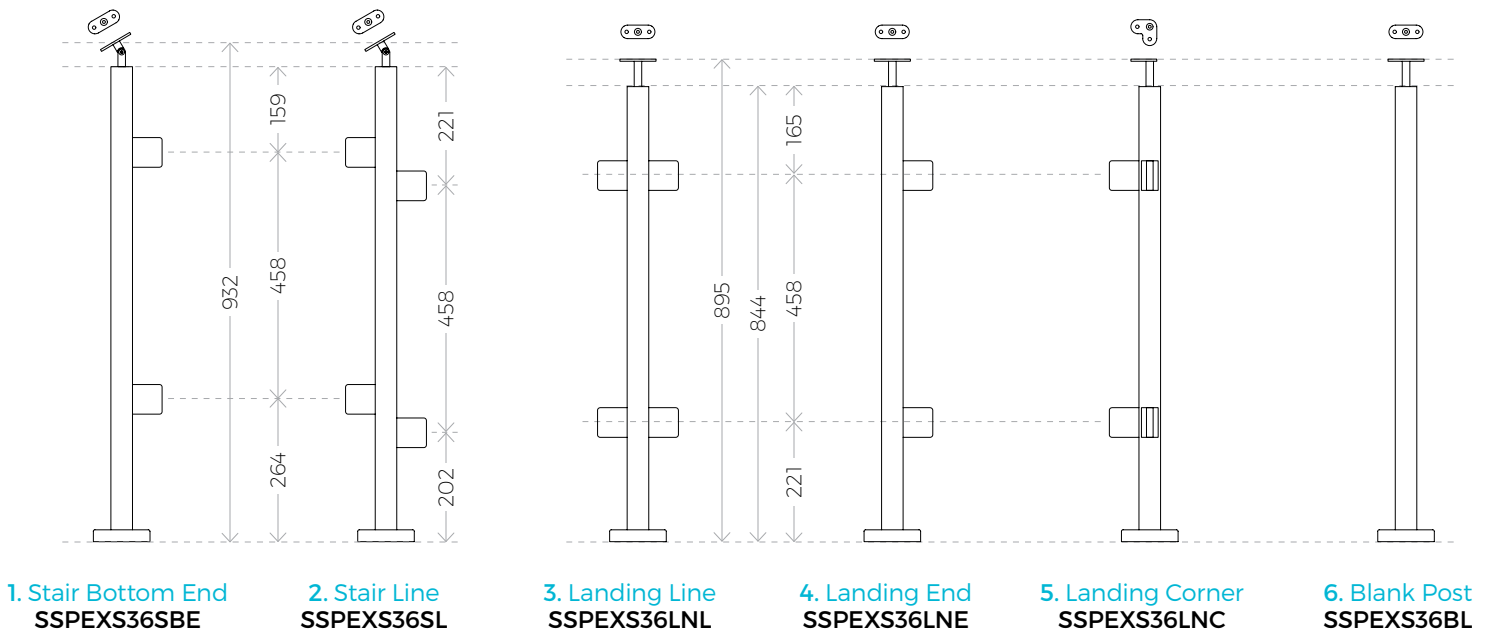
Scan for
Imperial
Size
Drawings



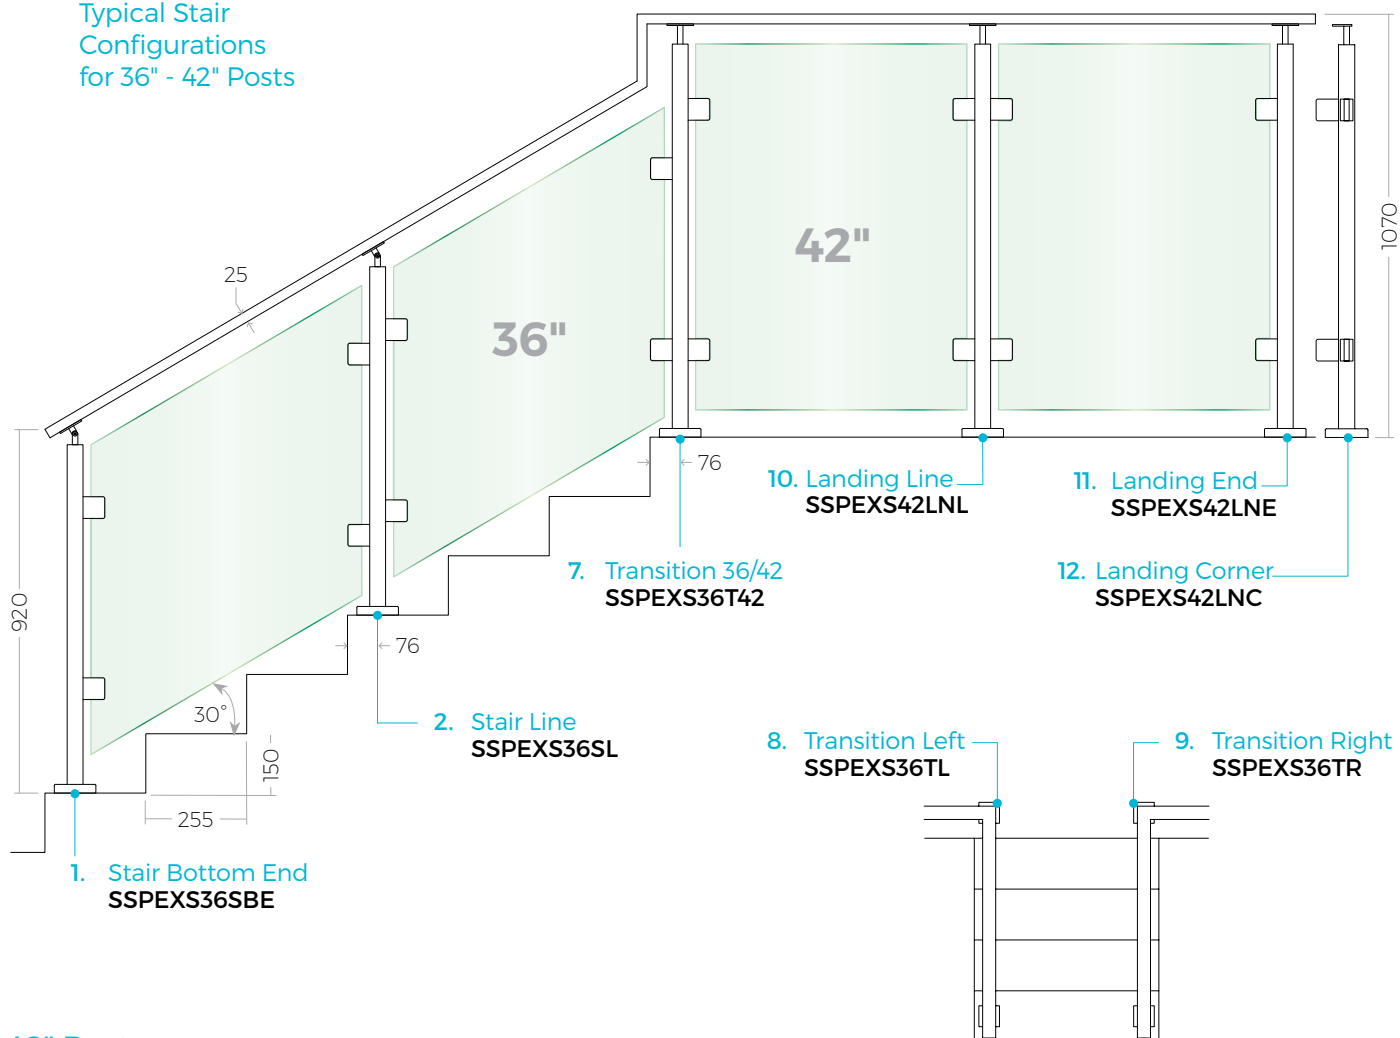Typical Stair
Configurations
for 36" - 42" Posts



42" Posts


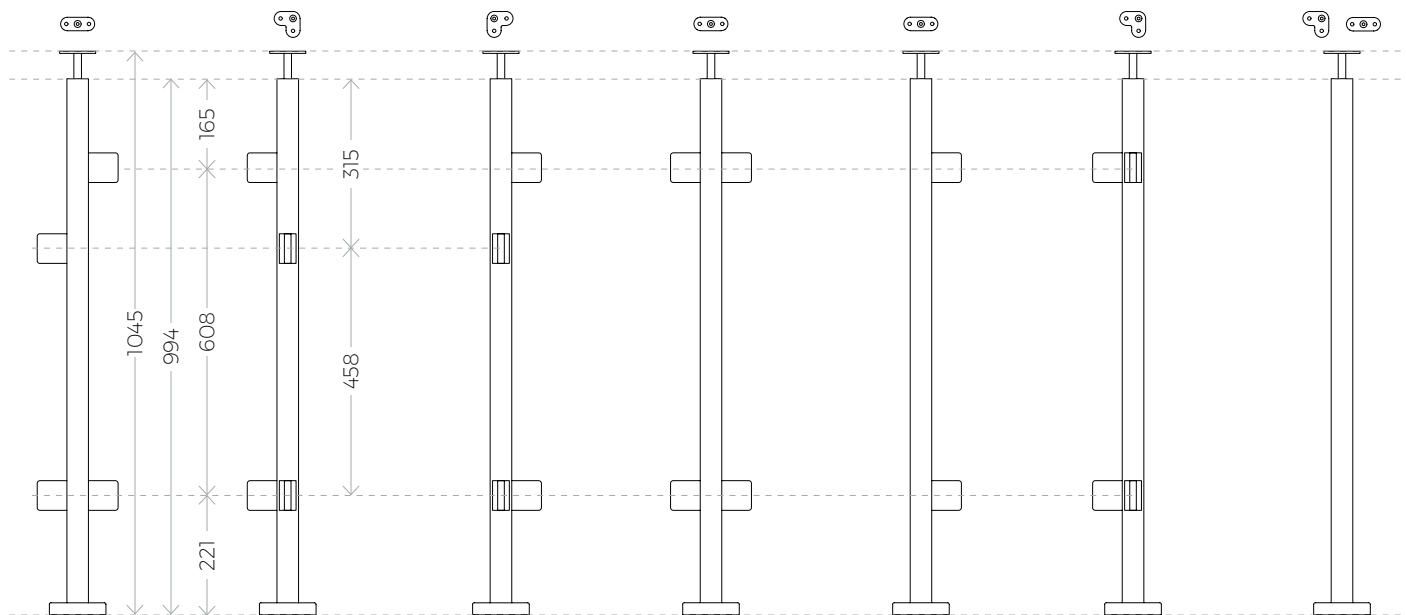


- 7. Transition 36/42** SSPEXS36T42
 8. Transition Left SSPEXS36TL
 9. Transition Right SSPEXS36TR
 10. Landing Line SSPEXS42LNL
 11. Landing End SSPEXS42LNE
 12. Landing Corner SSPEXS42LNC
 13. Blank Post SSPEXS42BL



Frameless Interior/Exterior






FI Features

- Engineered for **Interior and Exterior Residential or Commercial** applications.
- Square tube size of 40 x 40 x 2mm.
- Material is SS316 for Satin and SS304 for Powder Coated Satin Black.
- Provides **36"** high Railings for Stair and Landing and **42"** high option for Landings.
- Fully welded End Caps provide an open and frameless look for unobstructed view.
- Fully welded **4"** solid cast Stainless Steel Base Plates with flat push-fit base plate covers.
- Large Square Glass Clips secured by M8 x 20 Stainless Steel Fasteners through flow-drilled and tapped holes to the posts included.
- Suitable for **10-12mm** Glass.


	PART #	Description
1	SSPEFT36SBE	Stair Bottom End Post 36"
2	SSPEFT36SL	Stair Line Post 36"
3	SSPEFT36LNL	Landing Line Post 36"
4	SSPEFT36LNE	Landing End Post 36"
5	SSPEFT36LNC	Landing Corner Post 36"
6	SSPEFT36T42	Transition Line Post From 36" To 42"
7	SSPEFT36TL	Transition Left Post From 36" To 42"
8	SSPEFT36TR	Transition Right Post From 36" To 42"
9	SSPEFT42LNL	Landing Line Post 42"
10	SSPEFT42LNE	Landing End Post 42"
11	SSPEFT42LNC	Landing Corner Post 42"
12	SSPEFT42BL	Blank Post 42"
13	SSPEFT48BLG	Blank Gate Post 48" (Includes 2mm thick sleeve)

FI Components

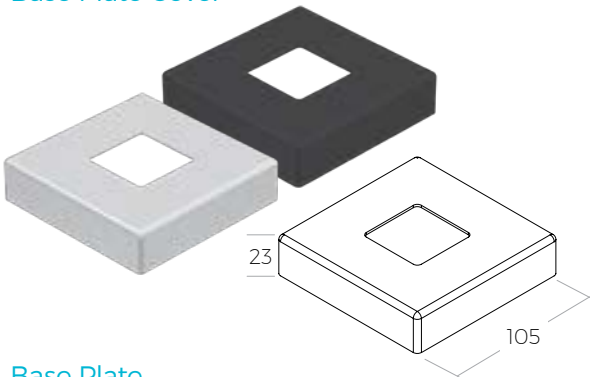
Base Plate Cover




Base Plate

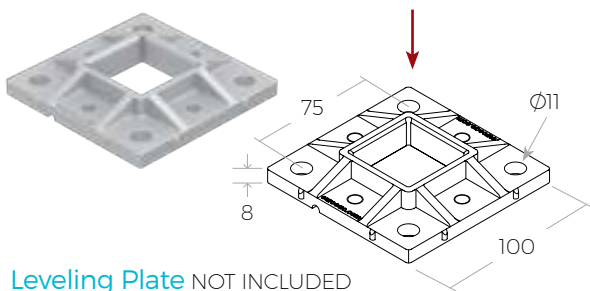


Leveling Plate NOT INCLUDED

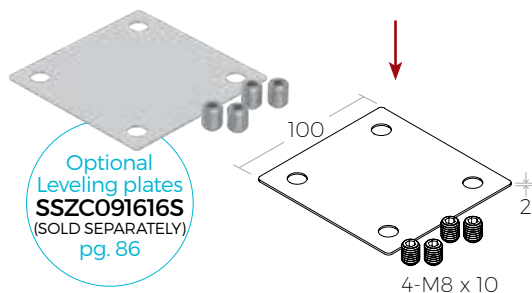

Glass Clip

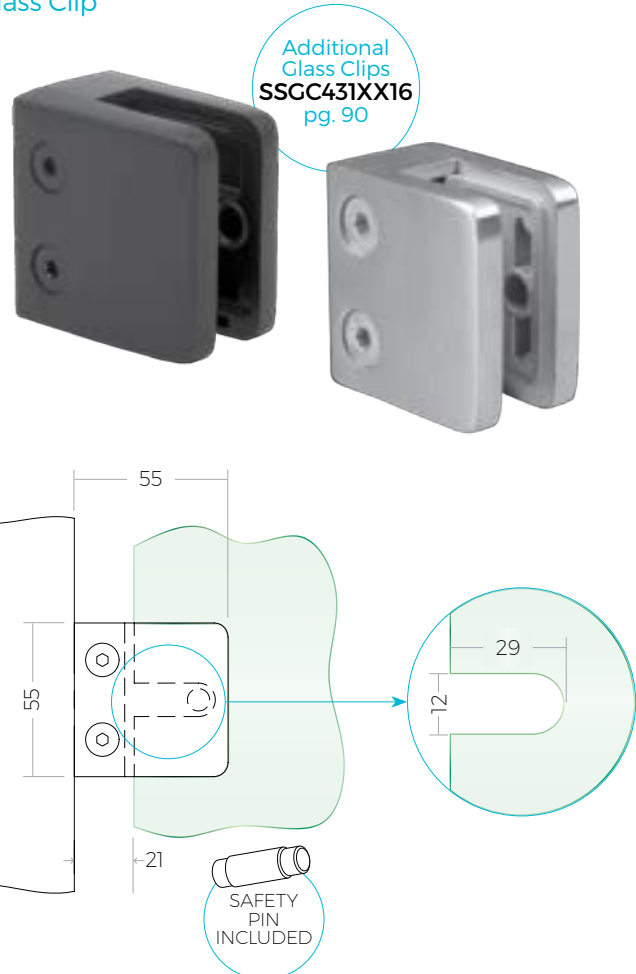


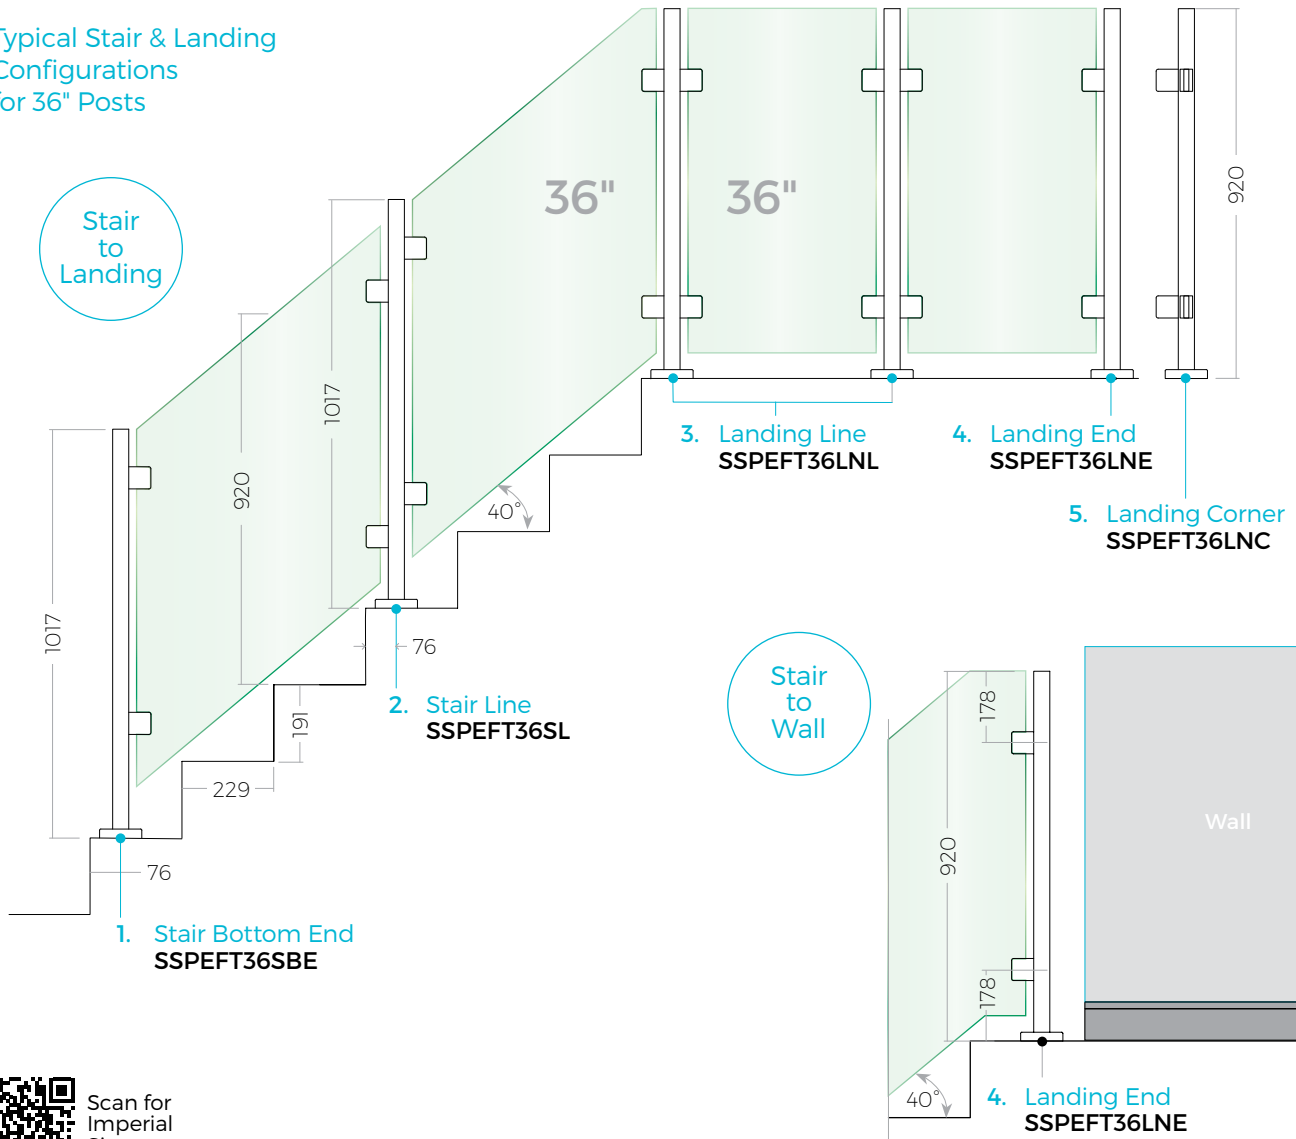Typical Stair & Landing Configurations for 36" Posts



Scan for
Imperial
Size
Drawings

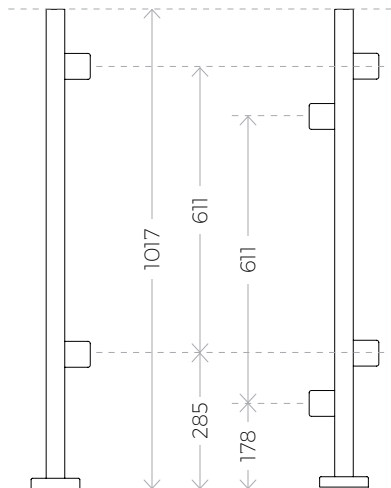
36" Posts for Stairs



1. Bottom End
SSPEFT36SBE

2. Line
SSPEFT36SL

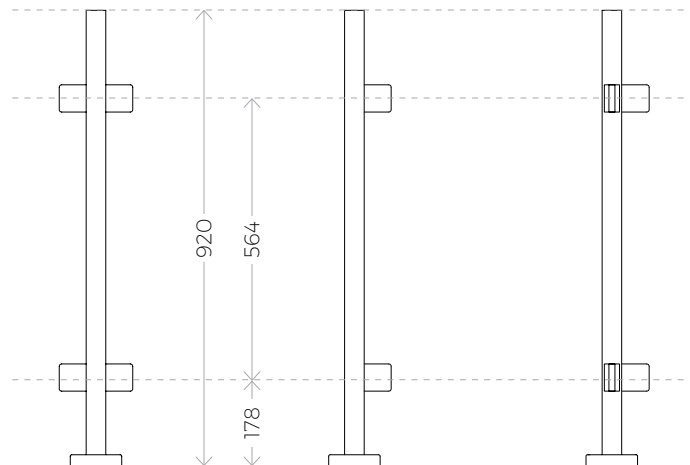36" Posts for Landing




3. Line
SSPEFT36LNL

4. End
SSPEFT36LNE

5. Corner
SSPEFT36LNC

Typical Stair
Configurations
for 42" Posts

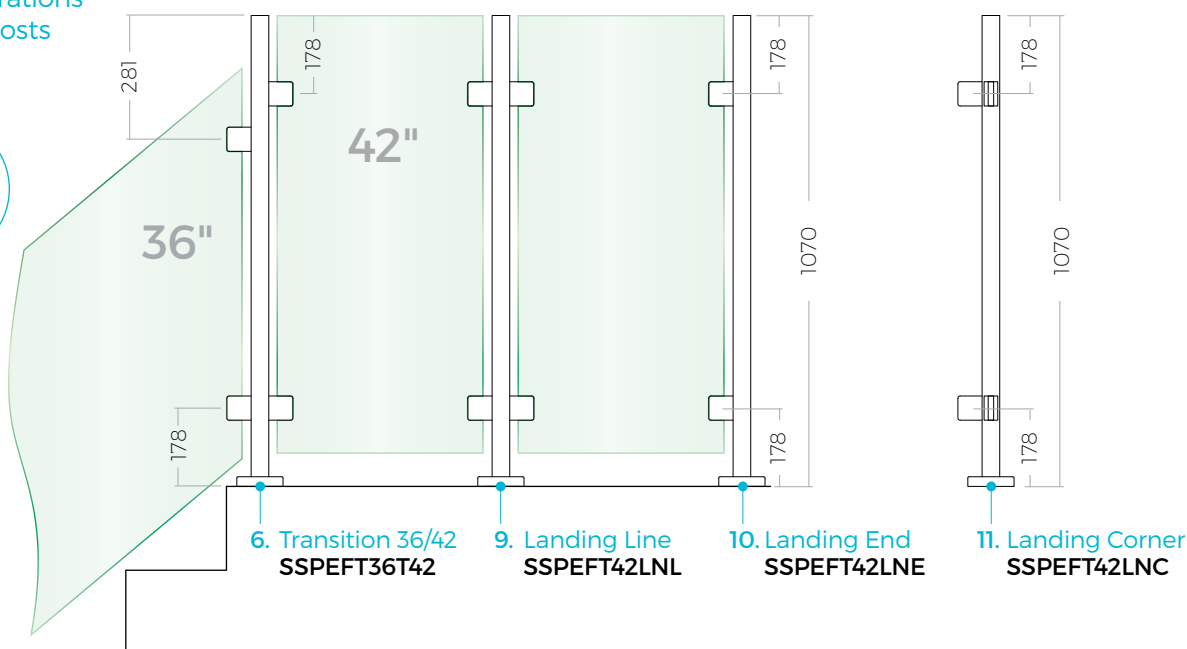Transition
and
Landing



OPTIONAL


Off-the-Post Brackets sold separately.



SSWF20016



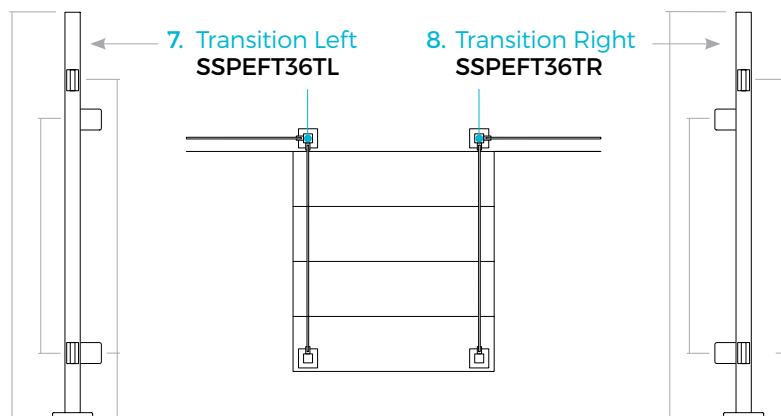
SSZH40116S



36" - 42" Transition Posts

42" Posts for Landing

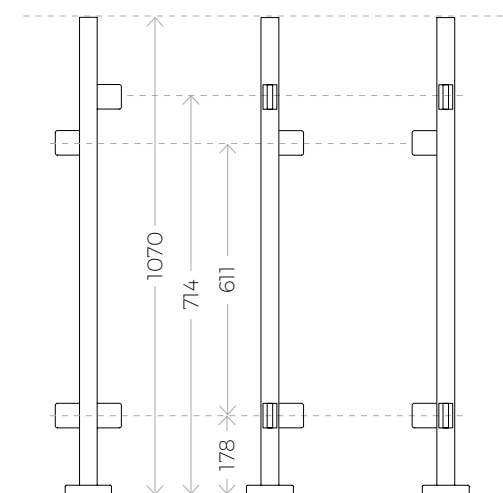
48" Gate Post



6. Line End
SSPEFT36T42

7. Transition Left
SSPEFT36TL

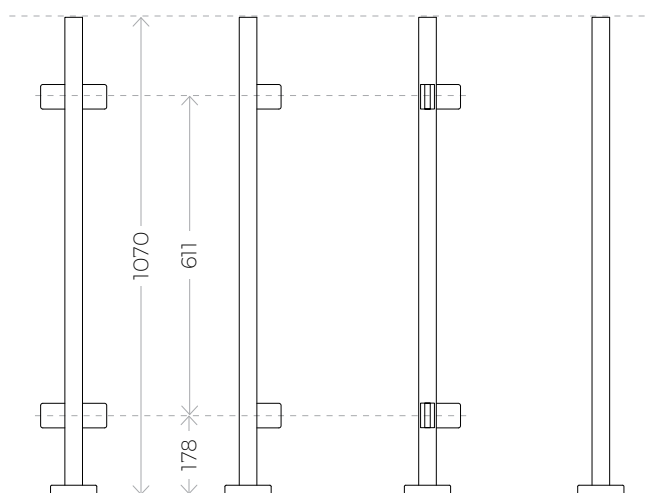8. Transition Right
SSPEFT36TR



9. Landing Line
SSPEFT42LNL

10. Landing End
SSPEFT42LNE

11. Landing Corner
SSPEFT42LNC

12. Blank Post
SSPEFT42BL



13. Blank Gate Post
SSPEFT48BLG

Includes
2mm
thick
sleeve.



Sidemount Interior/Exterior

**NEW
PRODUCT**



S1 Sidemount Interior/Exterior

NEW




S1 Features

- Engineered for **Interior and Exterior Residential** applications.
- Square tube size of 40 x 40 x 2mm with internal sleeve for additional strength.
- Material is SS316 for Satin and SS304 for Powder Coated Black.
- Provides **36"** high railings for stairs and **42"** high option for landings.
- Complies with the updated OBC requirements.
- Fully welded tube supports with a solid square stem, providing a modern and clean look.
- Includes large square glass clips secured by an M8 x 20 stainless steel fastener through flow-drilled and tapped holes to the posts.
- Flat handrail plates secured by an m8 screw included.
- 10mm and 12mm** gaskets included.


	PART #	Description
1	SSPES136SL	Stair Line Post 36"
2	SSPES142LNL	Landing Line Post 42"
3	SSPES142LNE	Landing End Post 42"
4	SSPES142BL	Blank Post 42"

Included S1 Components

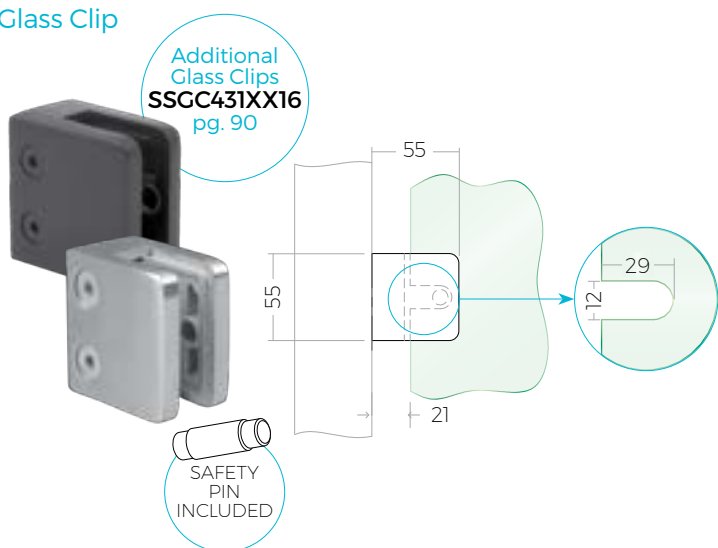Glass Clip



Tube Support

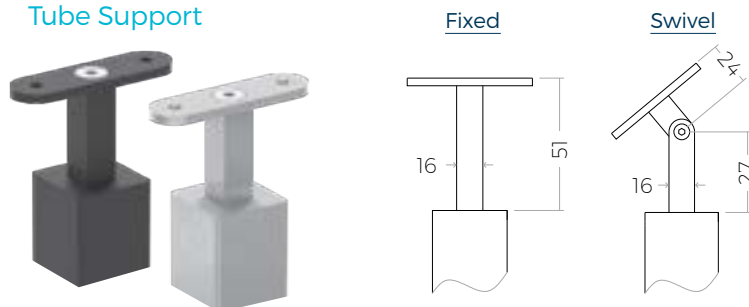


Compatible Saddles



Optional S1 Components

EAC Side Mount Post Support with **TILT-LOCK** Adjustable Railing Technology

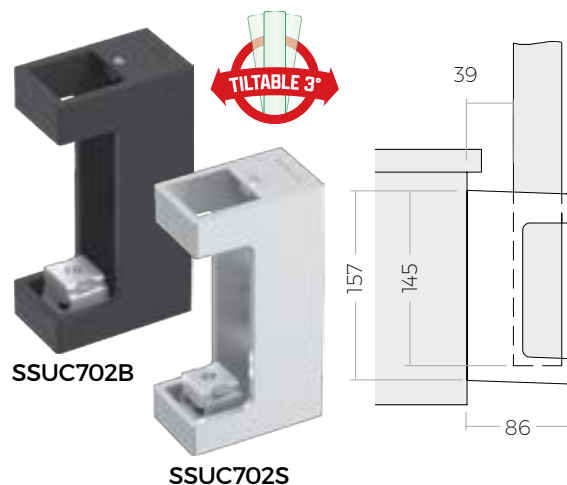(SOLD SEPARATELY)




- EAC patented technology enables a 3° forward and backward tilt adjustment of the post while the unique grip mechanism securely locks the post in place.
- Solid cast Duplex 2205 Ultra Marine-Grade Stainless Steel.
- Features sloped design with drain holes.
- Designed by EAC and engineered for the National Building Code of Canada.
- Patent Pending in Canada and U.S.



S1 Sidemount Interior/Exterior

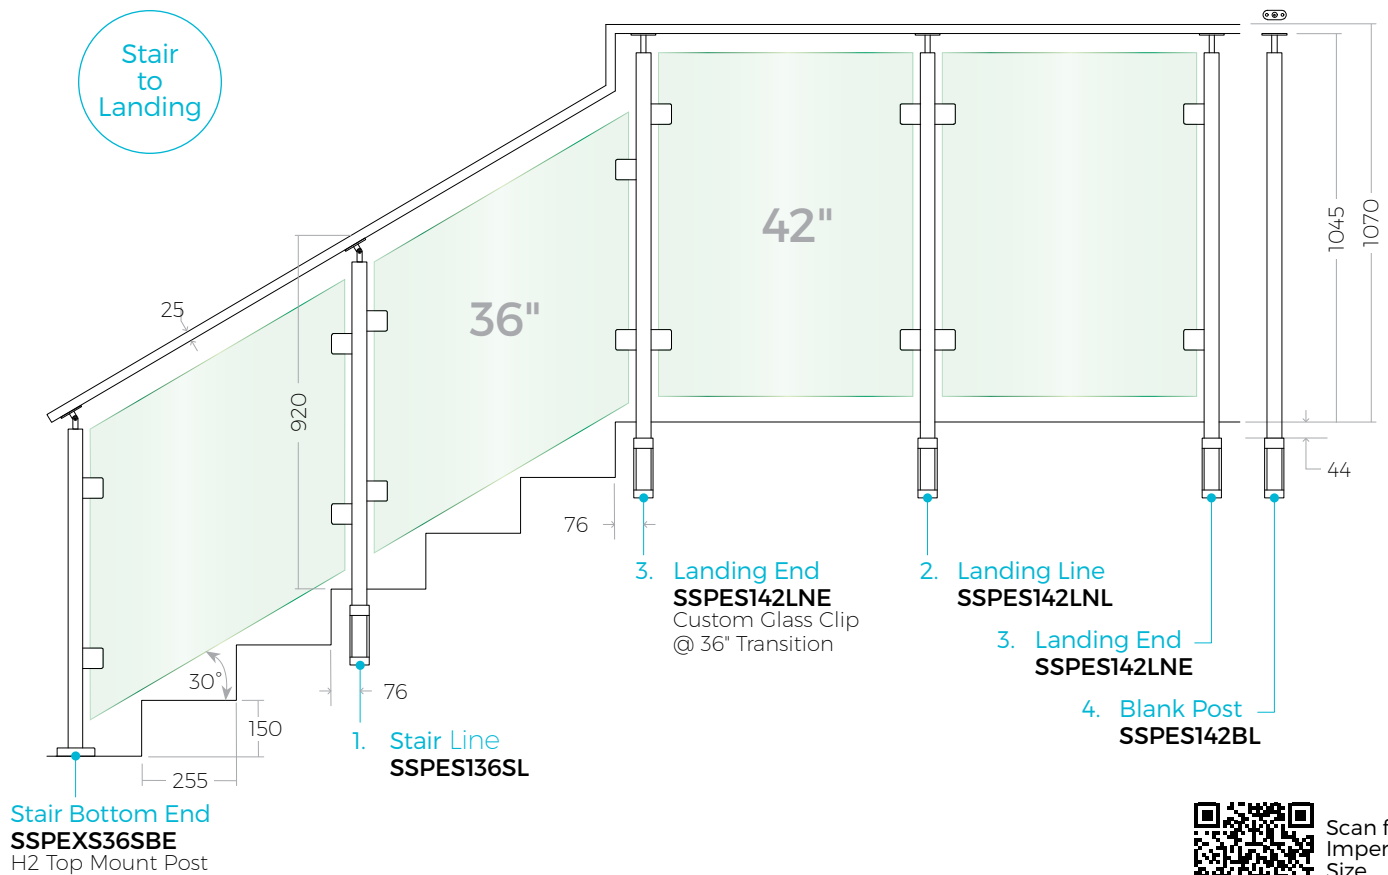
Typical Stair Configurations
for 36" (914mm) - 42" (1067mm) Posts






Scan for
Imperial
Size
Drawings

Notes:

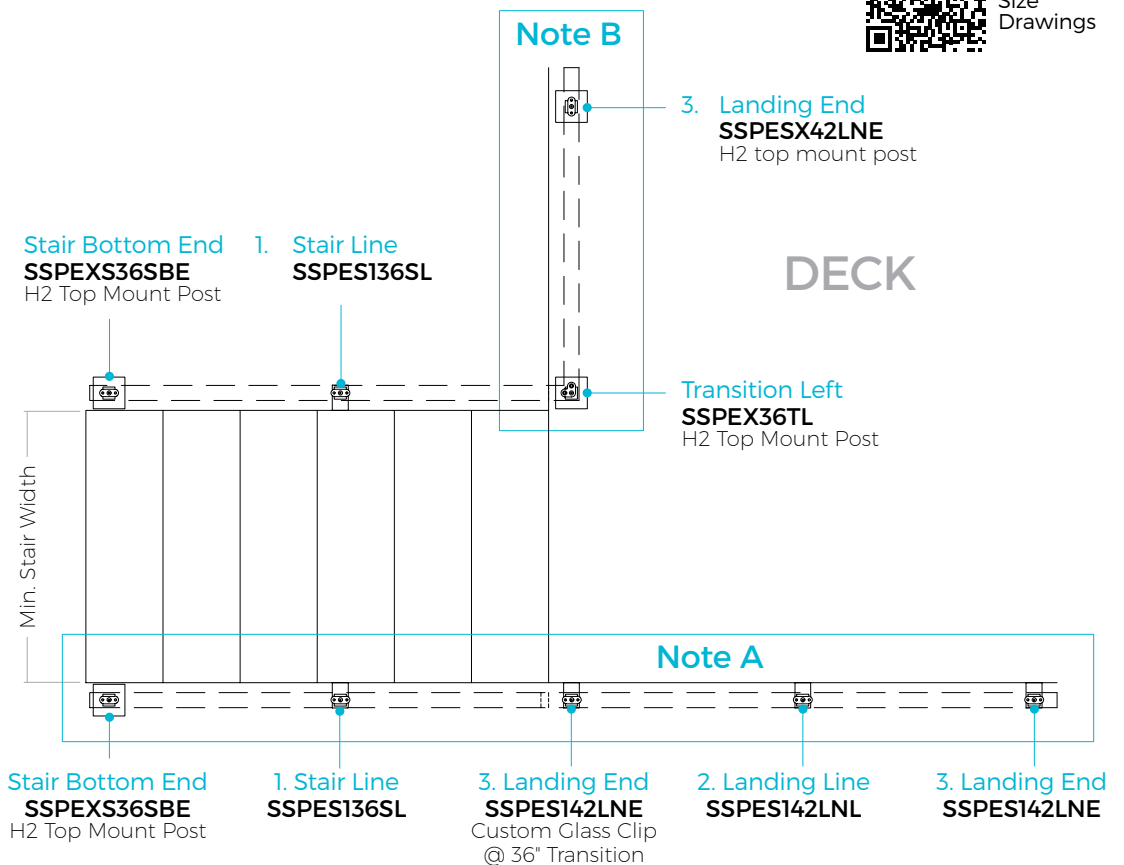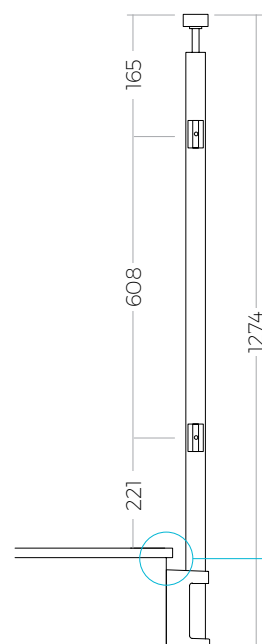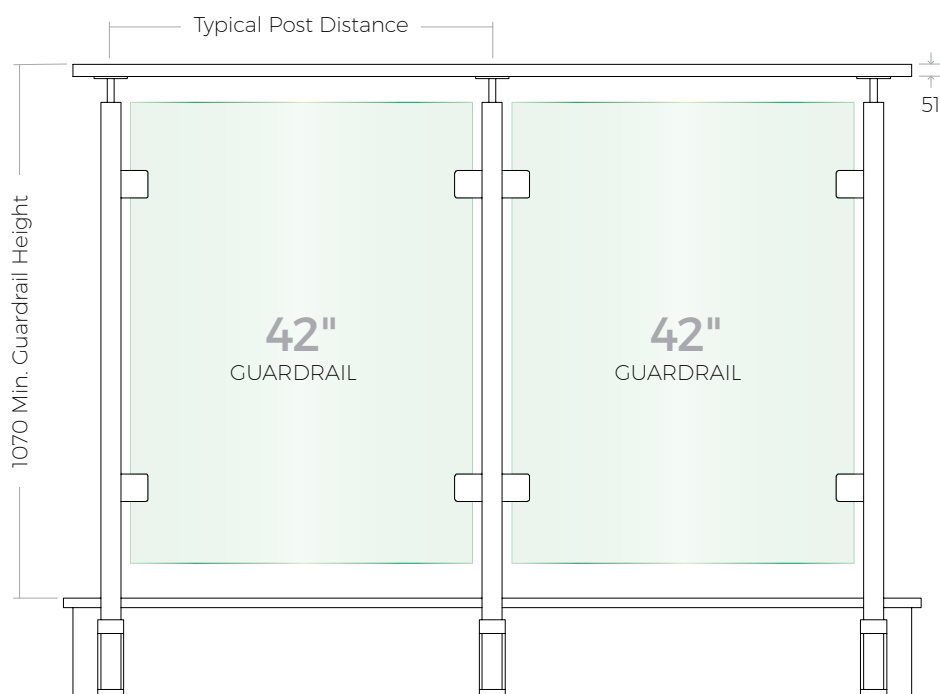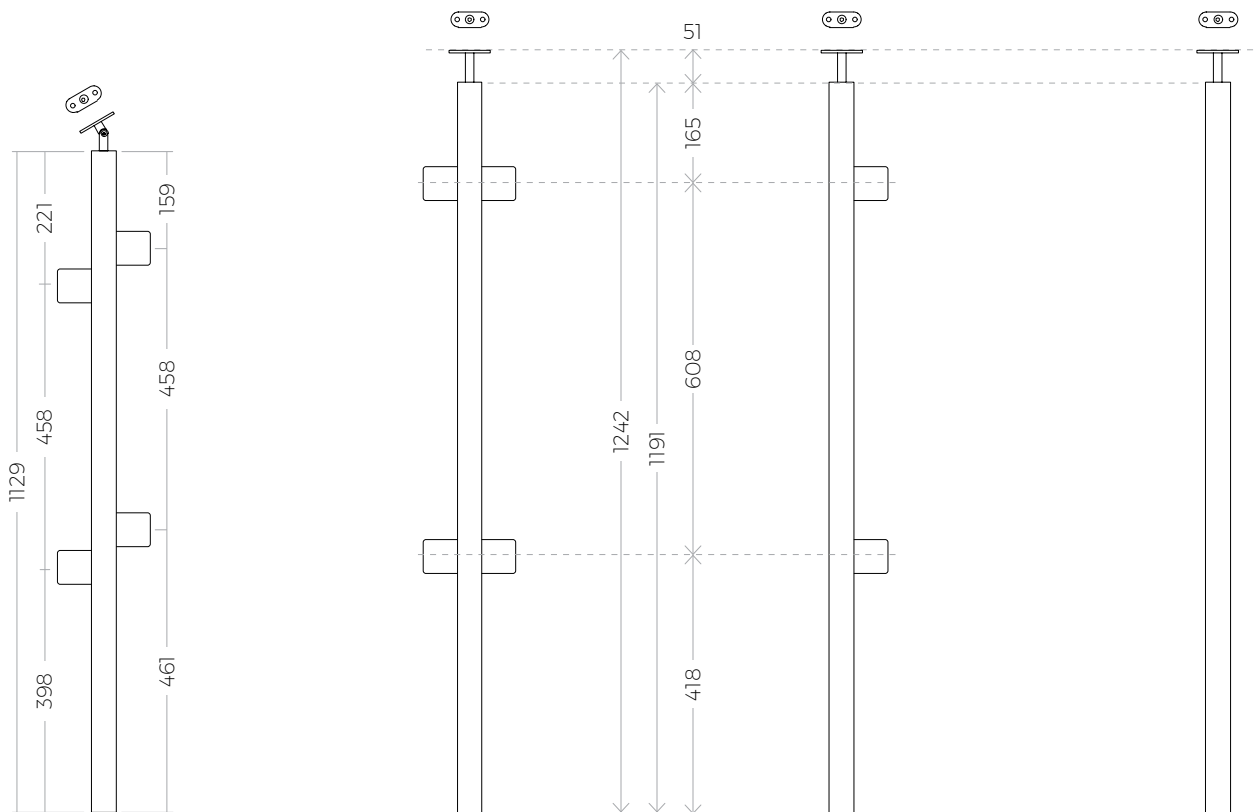- A. Ideal for configurations where stair width is limited and increased floor space is required without any obstructions.
- B. The **S1 Elite Exterior Side Mount Posts** can be paired with **H2 Elite Exterior Top Mount Posts**, as they share the same features (glass clips, spacing, tube support, etc.).





TYPICAL DECK

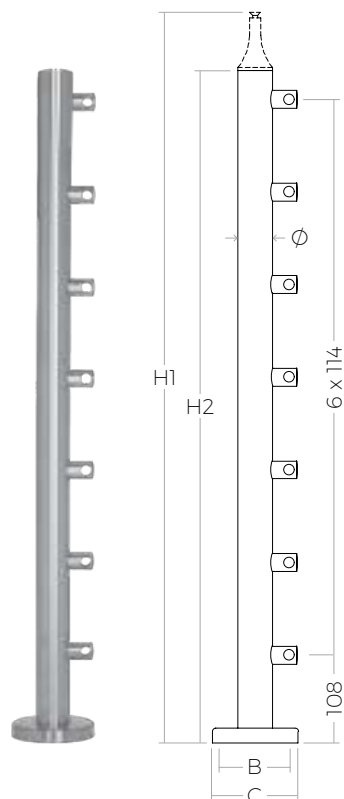
RECOMMENDED:
Provide 1.5" space
for the nosing.

Standard Posts & Accessories





Round Prefabricated Standard Posts



Prefabricated Posts for Rods

Assembly-Ready Round Posts for Rods are Prefabricated with 7 Rod Holders and are engineered for Interior and Exterior applications. See rods on page 112.


SPECS:

- SS316-Grade Stainless Steel.
- Tube Size: Ø42.4 (1.66") x 2mm. Tube Height: 892 (35 1/8").
- Rod Holder for Ø12mm (Ø1/2") Rods.

INCLUDES:

- 7 Prefabricated Rod Holders per Post.
- Choice of Tube Support with Handrail Attachment Plate, or Plate Cover.
- Fully welded solid cast Stainless Steel Base Plate and Plate Cover.

PART #	H1 (Height with Support)	H2 (Post Height)	B (Base)	C (Base Cover)	Ø (Tube Diameter)
SSPR166L36	892 (35 1/8")	828 (32 1/2")	100 (4")	105 (4 1/8")	42.4 (1 11/16")

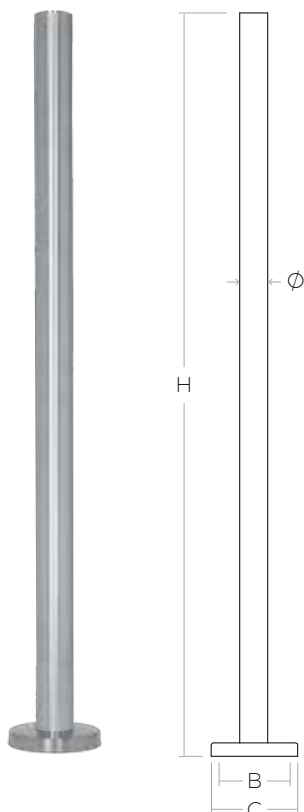

Prefabricated Blank Posts

Accessories Sold Separately:

Tube Support (pg 125).
Handrail Attachment Plates (pg 123).
Post End Caps (pg 115).

SPECS:


- SS316-Grade Stainless Steel

INCLUDES:

- Fully welded solid cast Stainless Steel Base Plate and Plate Cover.

PART #	H (Height)	B (Base)	C (Base Cover)	Ø (Tube Diameter)
SSPG16642	1067 (42")	100 (4")	105 (4 1/8")	42.4 (1 11/16")

Square Prefabricated Standard Posts



Prefabricated Blank Posts

Square Blank Posts are engineered for Interior and Exterior applications. Refer to back inside cover for glass guard design information.

ACCESSORIES (Sold separately)

- Tube Support (pg 126) / Handrail Attachment Plates (pg 123) / Post End Caps (pg 117).


SPECS:

- Satin Stainless Steel - SS316 Grade Stainless Steel.
- Powder Coated Satin Black -SS304 Grade Stainless Steel.

INCLUDES:

- Fully welded solid cast Stainless Steel Base Plate and Plate Cover.

PART #	H (Height)	B (Base)	C (Base Cover)	W (Tube Width)
SSPSQ4042	1067 (42")	100 (4")	109 (4 1/4")	40 (1 1/2")
SSPSQ5042	1067 (42")	100 (4")	109 (4 1/4")	51 (2")
SSPSQ4044B	1118 (44")	100 (4")	105 (4 1/8")	40 (1 1/2")
SSPSQ4048	1220 (48 1/16")	118 (4 5/8")	123 (4 13/16")	51 (2")



Prefabricated Blank Gate Post

SPECS:

- 40 x 40 mm square tube with inner sleeve
- 1220mm (48") height
- SS316 Grade Stainless Steel

INCLUDES:

- Fully welded 4" solid cast stainless steel base plates with flat push-fit base plate covers.
- Fully welded end caps

PART #	H (Height)	B (Base)	C (Base Cover)	W (Tube Width)
SSPEFT48BLC	1220 (48 1/16")	100 (4")	105 (4 1/8")	40 (1 9/16")


Heavy Duty Posts





Features


- Heavy duty Stainless Steel Round and Square Posts are engineered for Interior and Exterior applications. Refer to back inside cover for glass guard design information.
- Square tube size measure 50x50mm, while round posts are $\varnothing 50\text{mm}$
- Post material is **4.8mm** thick Tube in SS316 Satin finish.
- End, Line, and Corner Posts are designed for 1070mm (42 1/8") high **Landing** applications (with Handrail). Included with Posts: Fixed Tube Support at the top, and fully welded 12mm thick solid cast Stainless Steel Base Plate and Snap-fit Plate Cover at the bottom. Handrail Attachment Plates for Tube Support and End Cap sold separately. Leveling Plate also sold separately.
- Blank Posts are designed for **Stairway** applications. Included: Swivel Tube Support at the top. Handrail Attachment Plates for Tube Support and End Cap sold separately. All Post bottom options sold separately: Stanchion, Base Plate, Plate Cover, and Leveling Plate. Core Mount installation possible.
- Fully welded End Cap with Tube Support Adjustable by a max. of $\pm 10\text{mm}$.
- 3/8"-16 Tapped Holes on Posts suit a variety of Fittings to secure Glass Panels.



Component and Installation Methods

Landing Posts with Welded Bases
Designed for End, Line, and Corner Post configurations.

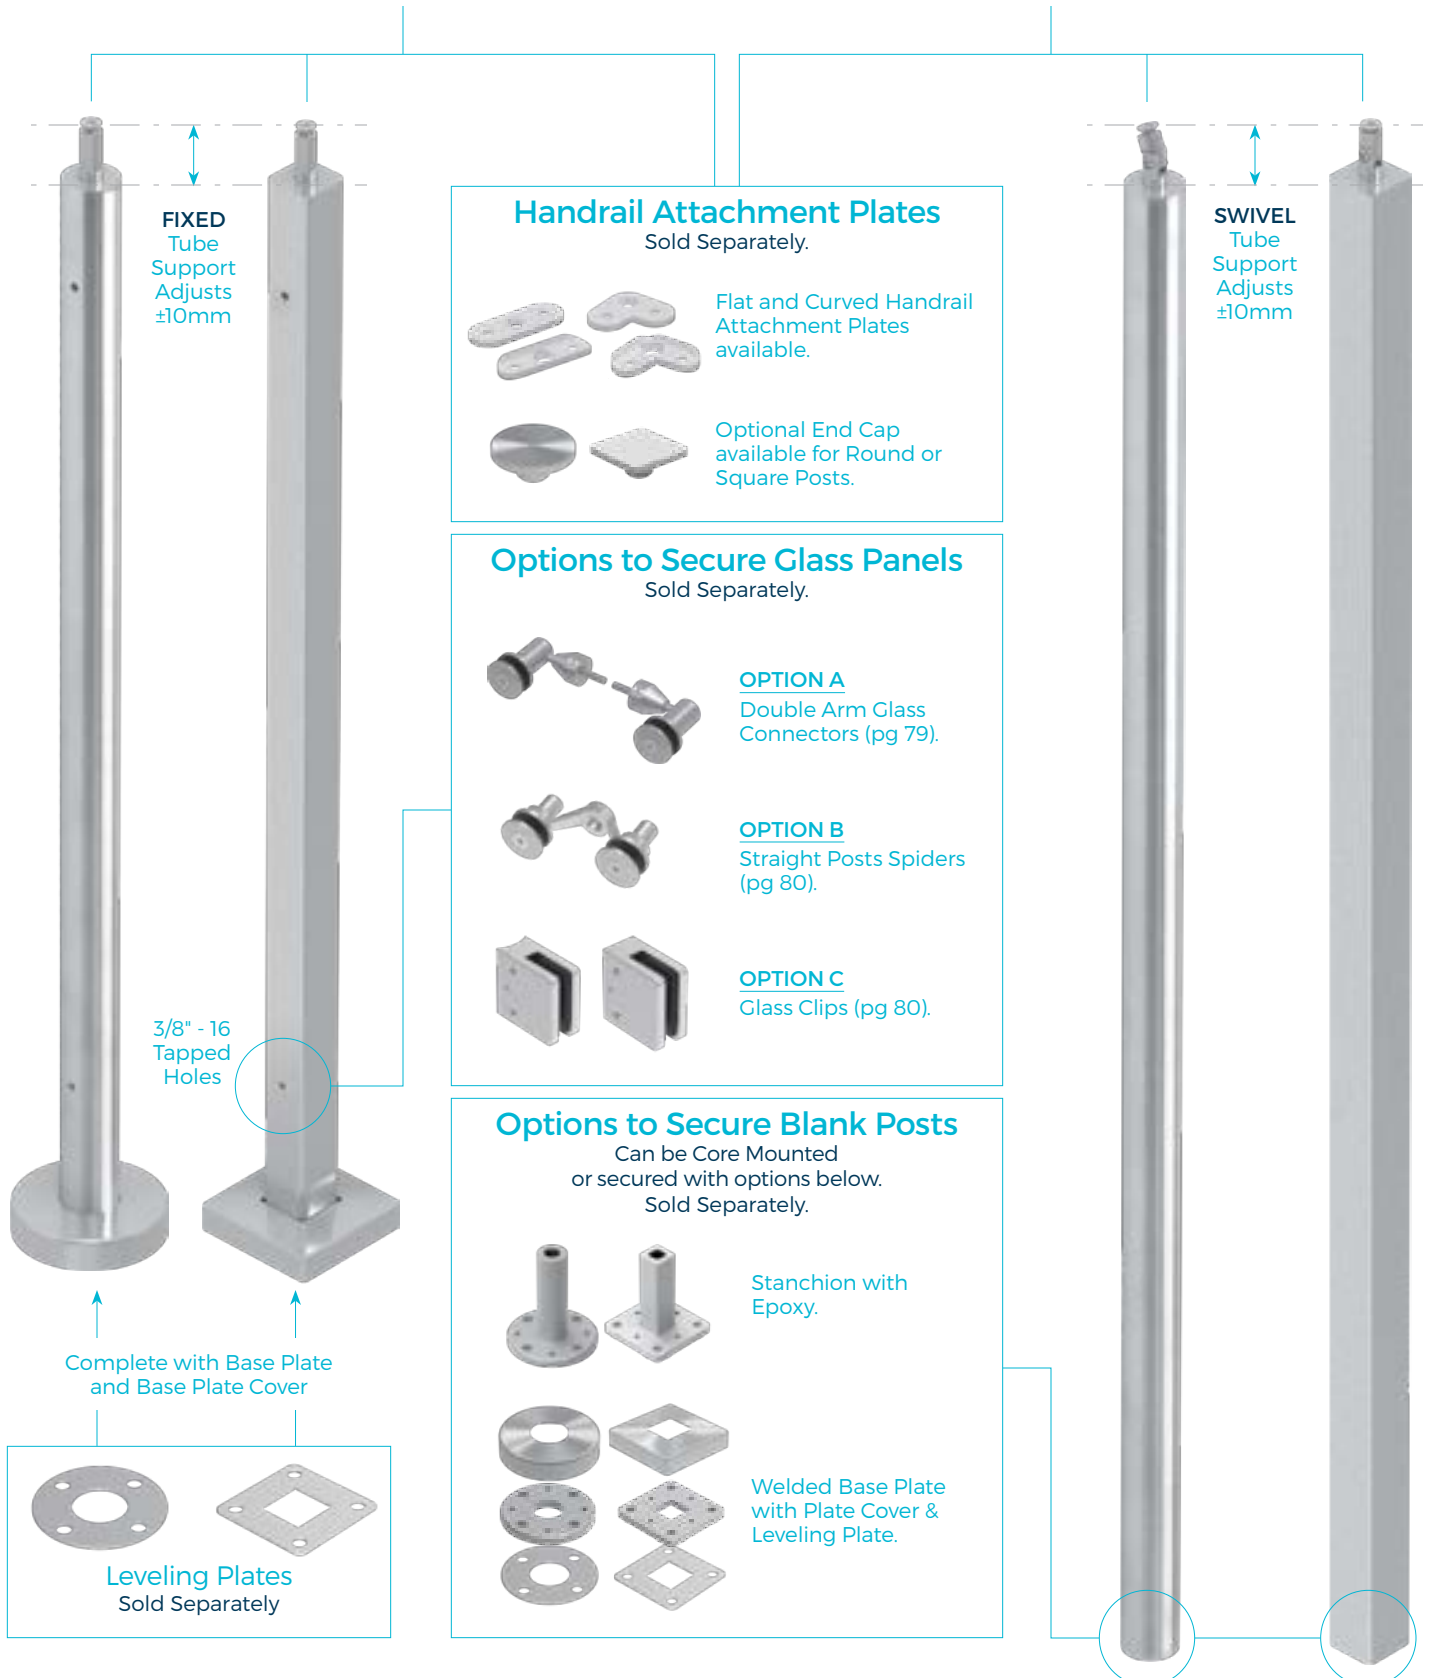
Blank Posts
Designed for Stair and Core Mount installations.





Scan for imperial drawings of
Heavy Duty Post series.

Post Top Options for both Round & Square Posts




Tube
Support
Included

SSHPZAC01

Fixed

SSHPZAC02

Swivel




Straight Handrail
Attachment Plate
Sold Separately

SSHPZAC05

Flat

SSHPZAC03

Curved



90° Handrail
Attachment Plate
Sold Separately


SSHPZAC06

Flat

SSHPZAC04

Curved

Round Heavy Duty Posts $\phi 50\text{mm}$



SSHPRND50E

End Post



SSHPRND50L

Line Post



SSHPRND50C

Corner Post




SSHPRND50B

Blank Post


Options for Round Posts

Sold Separately




SSHPRND50X2

End Cap




SSHPRND50X3

Base Plate




SSHPRND50X4

Leveling Plate



SSHPRND50X5


Plate Cover



SSHPRND50X6

Stanchion

Square Heavy Duty Posts 50x50mm



SSHPQR50E

End Post



SSHPQR50L

Line Post



SSHPQR50C

Corner Post




SSHPQR50B

Blank Post


Options for Square Posts

Sold Separately




SSHPQR50X2

End Cap




SSHPQR50X3

Base Plate




SSHPQR50X4

Leveling Plate



SSHPQR50X5


Plate Cover



SSHPQR50X6

Stanchion


Heavy Duty Post Glass Panel Attachment Options



Option A - Double Arm Glass Connectors


- Used for Landing & Stairway Railings and other Glass installations for Interior and Exterior applications.
- Solid material SS316 in Satin finish.
- Suitable for **10-19mm** Glass.
- Available in Fixed and Swivel models; come as a set of two.
- Recommended Glass Hole size 19mm.
- Stainless Steel Threaded Rod 3/8"-16 x 1 1/4" included to secure Glass Connectors to Posts.
- Swivel Nut Wrench (SSHPZAC14) available for use with Swivel Double Arm Glass Connector (SSHPZAC13).
- Adapter for Round Post Ø50mm (2") available.

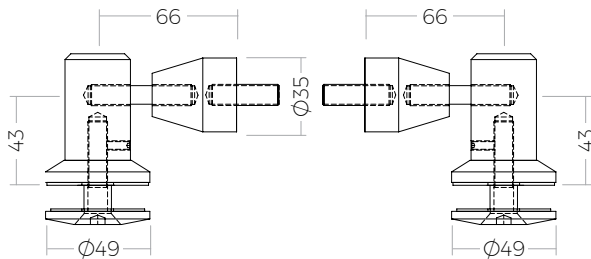Use Swivel Nut Wrench **SSHPZAC14** to adjust the angle for Swivel Glass Connector.



Double Arm Fixed Glass Connector

PART #	Description
SSHPZAC12	Fixed.

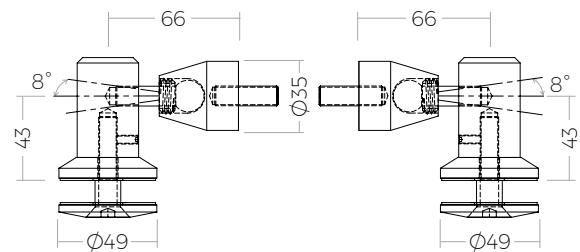


Double Arm Swivel Glass Connector

PART #	Description
SSHPZAC13	Swivel.

Accessories



PART #	Description
SSHPZAC14	Swivel Nut Wrench for Swivel Connector.

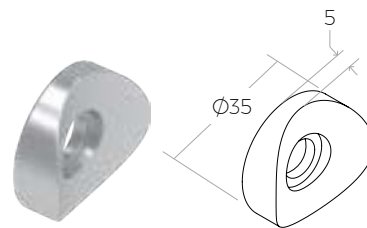


PART #	Description
SSHPZAC09	Arm Glass Connector Adapter for Ø50 (2") Round Post.

Option B - Straight Post Spiders


- Used for Landing & Stairway Railings and other Glass installations for Interior and Exterior applications.
- Solid material SS316 in Satin finish.
- Suitable for **12-19mm** Glass.
- Available in Single Arm and Double Arm models;

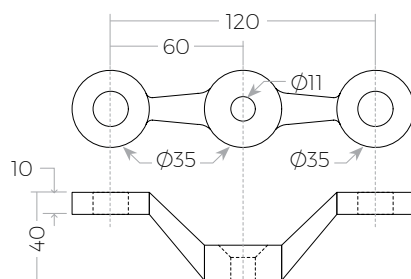- Spiders need to be used with either Fixed or Swivel Glass Connectors to secure Glass Panels.
- Recommended Glass Hole size 19mm.
- Stainless Steel Screw 3/8"-16 x 1 1/4" included to secure Spiders to Posts.
- Adapter for Round Post $\varnothing 50\text{mm}$ (2") available.




Straight Post Double Arm Spider

PART #	Description
SSHPCZAC08	Double Arm.




Straight Post Single Arm Spider

PART #	Description
SSHPCZAC07	Single Arm.



PART #	Description
SSHPCZAC10	Fixed Glass Connector.

Must use
Connectors
with Spider
Arms above



PART #	Description
SSHPCZAC11	Swivel Glass Connector.

Accessories




PART #	Description
SSHPCZAC09	Arm Glass Connector Adapter for $\varnothing 50$ (2") Round Post.

Option C - Glass Clips


- Used for Landing & Stairway Railings and other Glass installations for Interior and Exterior applications.
- Solid material SS316 in Satin finish.
- Suitable for **12-13.52mm** Glass.

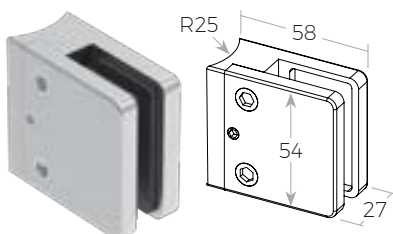- Available in Curved and Flat Back for Round and Square Posts 50mm (2") respectively.
- Stainless Steel Screw 3/8" - 16 x 1" included to secure Glass Clips to Posts.
- Stainless Steel Set Screw on Cap to properly secure Glass Panels.



Curved Back

PART #	Description
SSHPRND50X1	For Round Heavy Duty Posts.

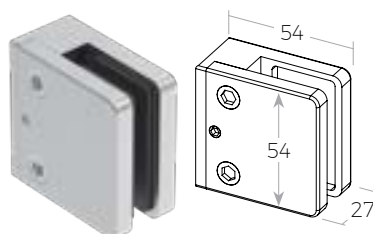

Flat Back

PART #	Description
SSHPSQR50X1	For Square Heavy Duty Posts.

Post Bases

PHOTO: Sierra Glass



Discs



Base Plates

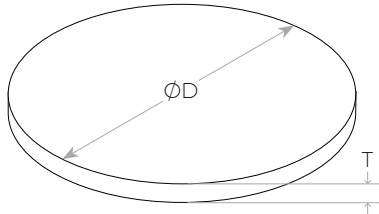


Flanges




Covers


Discs



PART #	ØD (Plate Dia)	T (Thickness)
SSPLO800616S	80	6
SSPL1000116S	100	6

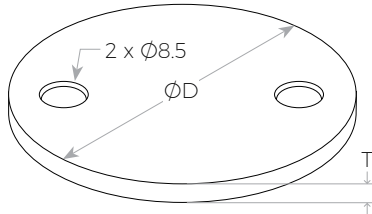


PART #	ØD (Plate Dia)	T (Thickness)
SSPW0801116S	80	6

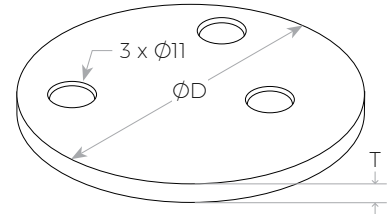


PART #	ØD (Plate Dia)	T (Thickness)
SSPW1001216S	100	6


Round Base Plates




PART #	ØD (Plate Dia)	T (Thickness)	HS (Hole Size)	ID (Tube Size)
SSPW0581516S	58	5	3 x Ø6.5	8.2
SSPW0701516S	68	5	3 x Ø6.5	8.2




PART #	ØD (Plate Dia)	T (Thickness)	HS (Hole Size)	ID (Tube Size)
SSPW1001616S	100	6	2 x Ø11	38.1



PART #	ØD (Plate Dia)	T (Thickness)	HS (Hole Size)	ID (Tube Size)
SSPW44216S	100	8	4 x Ø11	42.4
SSPW45016S	120	10	4 x Ø14	50.8




PART #	ØD (Plate Dia)	T (Thickness)	HS (Hole Size)	ID (Tube Size)
SSPW1071316N Cast Base Plate	100	8	4 x Ø11	42.4



Base Flange

PART #	ØD (Plate Dia)	ID (Tube Size)	T (Thickness)
SSUC0010616S	85	38.1	5
SSUC0010316S	85	42.4	5

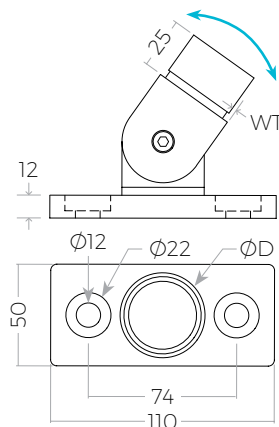

Flexible Stringer Round Post Mount

PART #	ØD (Tube Size)	WT
SSFSRND100	42.4	2.0

WT represents the Wall Thickness of the Tube used with this Mount.







Plate Covers

PART #	ØD (Plate Dia)	ID (Tube Size)	T (Thickness)
SSPC0600116S	60	12.5	12
SSPC0761316S	76	38.1	12
SSPC0850416S	85	38.1	16
SSPC1051316S	105	38.1	25
SSPC1050216S	105	42.4	16
SSPC1050116S	105	42.4	25
SSPC1051416S	105	50.8	25
SSPC1251416S	125	50.8	25

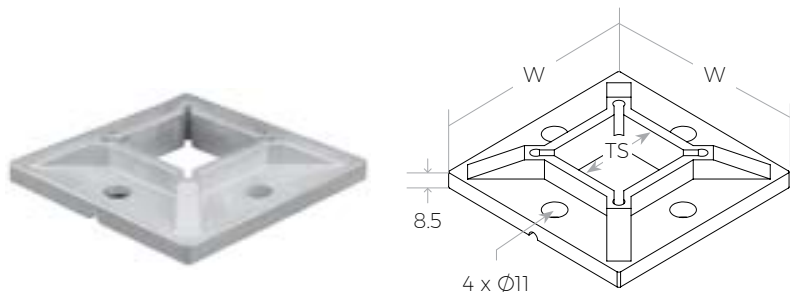

Cast Base Plate

PART #	TS (Tube Size)	W (Width)
SSZW1000516N	50.8 x 50.8	100 x 100

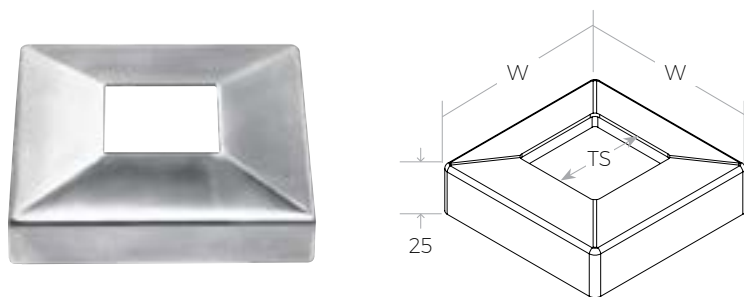

Chamfered Plate Cover

PART #	TS (Tube Size)	W (Width)
SSZC0814016S	40 x 40	75 x 75
SSZC1054016S	40 x 40	105 x 105
SSZC1085016S*	50.8 x 50.8	110 x 110

*Use with plate above.



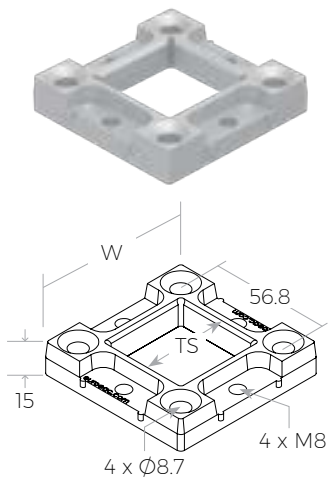
Use with Elite Post Handrail Series

S
Satin
Stainless
Steel

B
Powder
Coated
Satin Black

Base Plate Cover Only


Cast Base Plate



PART #	TS (Tube Size)	W (Width)
SSZW1000316N	40 x 40	76 x 76
Mill finish Used for both S & B Finishes.		

Flat Base Plate Cover

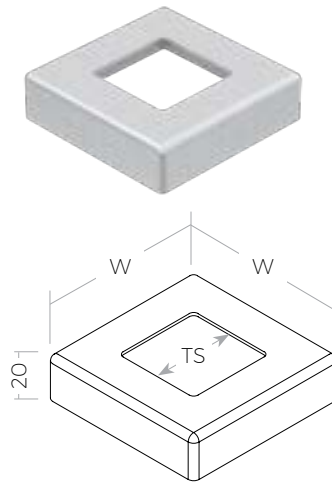
Use with **SSZW1000316N**



PART #	TS (Tube Size)	W (Width)	Finish
SSZC0914004S	40 x 40	81 x 81	S
SSZC0914004B	40 x 40	81 x 81	B

Leveling Plate

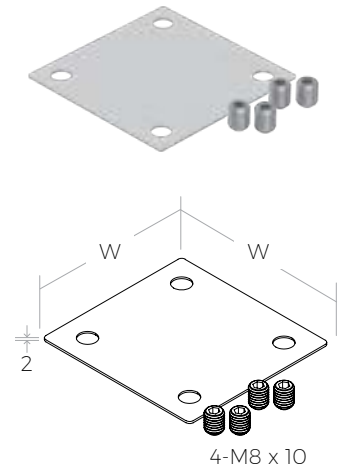
Use with **SSZW1000316N** only.
Recommended for concrete applications.



PART #	W (Width)
SSZC091504S	76 x 76
Mill finish Used for both S & B Finishes.	

Use with Elite Post Frameless Series

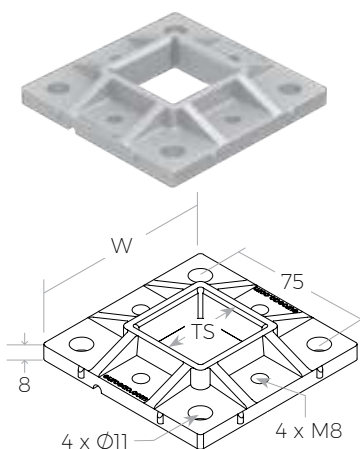
Cast Base Plate



PART #	TS (Tube Size)	W (Width)
SSZW1000416N	40 x 40	100 x 100
Mill finish Used for both S & B Finishes.		

Flat Base Plate Cover

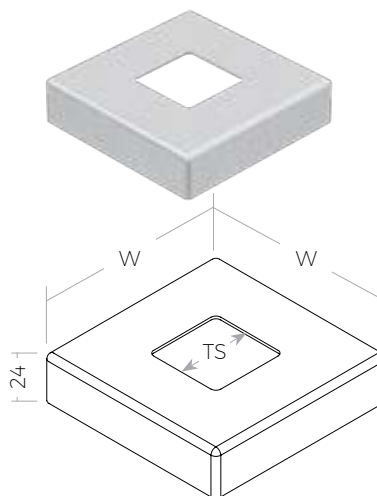
Use with **SSZW1000416N**



PART #	TS (Tube Size)	W (Width)	Finish
SSZC0914005S	40 x 40	105 x 105	S
SSZC0914005B	40 x 40	105 x 105	B

Leveling Plate

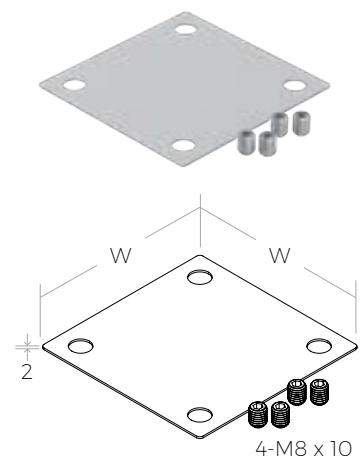Use with **SSZW1000416N** only.
Recommended for concrete applications.



PART #	W (Width)
SSZC091616S	100 x 100
Mill finish Used for both S & B Finishes.	

Glass Clips & Glass Connectors



Glass Clips

Our Glass Clips are available in Round and Square designs, with flat backs for Wall or Square Post applications, or a curved back for Round Post applications. All options are available in Satin, and most offering Powder Coated Satin Black finishes as well. Our Small and Large Glass Clips accommodate Glass Thicknesses ranging from **6-12mm** and our Thick Glass Clips accommodate Glass Thicknesses ranging from **13.52-21.52mm**.

Our Glass Clips are made of high quality 316 Grade Stainless Steel, giving them superior strength and longevity around high traffic areas and in Exterior environments.

Our "ZINC" Glass Clips are Zamak, which is a family of alloys with a Base Metal of Zinc and alloying elements of Aluminum, Magnesium, and Copper. The addition of Magnesium and Copper provides it with diverse properties and allows it to cast. Zamak alloys exhibit an excellent combination of cost, strength, ductility, impact strength, and finishing characteristics. Our Zinc Glass Clips are recommended for Interior use only.



To avoid installed Glass slipping over time, it is recommended to use the **SAFETY PIN** that comes with the Glass Clips, particularly for the bottom Glass Clips installed on either side of the Glass. **SSM820** - Recommended Screw for attaching Glass Clips to Metal Posts.

Glass Connectors

Our Ultra Slim Collection consists of Standard Connectors to accommodate **10-12mm** Glass, and the Heavy Duty Connectors for up to **21.52mm** Glass. They both include Gaskets and Single Grub Screws. Our Glass Connectors are made of Duplex 2205, which has superior strength and corrosion resistance when compared to SS316. All of our Standard Connectors are available in Satin, and some offer Powder Coated Satin Black, PVD Brushed Graphite, and PVD Brushed Gold.

To see more Connectors, go to page 93 or visit our website.

euroeac.com

Glass Clip



Glass Connector

Round Glass Clips with Pin



S
Satin
Stainless
Steel

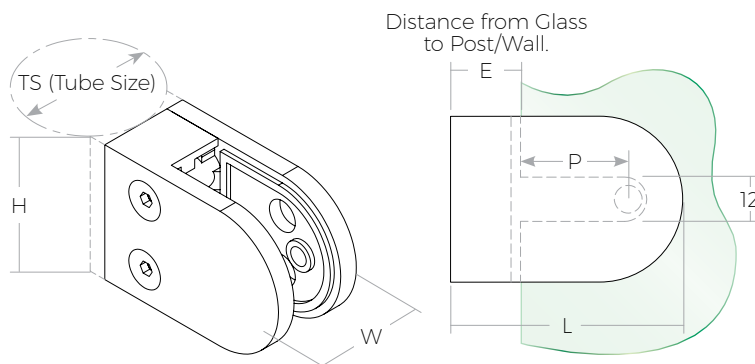
Round Clip
Flat Back



Round Clip
Curved Back



Installed on a Wall
or Square Tubing.



Small Clips

SS316	Back	TS	L	P	E	W	H	Finish
SSGC101XX16S	Flat	-	50	20	18	27	40	S
SSGC106XX16S	Curved	38.1	50	20	18	27	40	S
SSGC103XX16S	Curved	42.4	50	20	18	27	40	S



Applicable Gaskets

PART #	Glass Thickness
SSGR10001RBN	6
SSGR10002RBN	8
SSGR10003RBN	10



Large Clips

SS316	Back	TS	L	P	E	W	H	Finish
SSGC201XX16S	Flat	-	63	28	19	30	45	S
SSGC206XX16S	Curved	38.1	63	28	19	30	45	S
SSGC203XX16S	Curved	42.4	63	28	19	30	45	S
SSGC207XX16S	Curved	50.8	63	28	19	30	45	S
ZINC	Back	TS	L	P	E	W	H	Finish
SSGC201XXZMS	Flat	-	63	28	19	30	45	S
SSGC206XXZMS	Curved	38.1	63	28	19	30	45	S
SSGC203XXZMS	Curved	42.4	63	28	19	30	45	S
SSGC207XXZMS	Curved	50.8	63	28	19	30	45	S



Applicable Gaskets

PART #	Glass Thickness
SSGR20001RBN	6
SSGR20002RBN	8
SSGR20003RBN	10
SSGR20004RBN	12

Square Glass Clips with Pin



S
Satin
Stainless
Steel

B
Powder
Coated
Satin Black

Square Clip
Flat Back



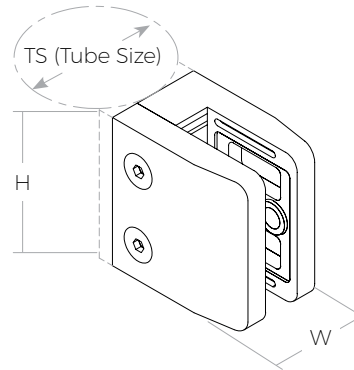
Square Clip
Flat Back with
Set Screw




Square Clip
Curved Back



Installed on a Wall
or Square Tubing.



Distance from Glass
to Post/Wall.



Small Clips Curved back available only in Satin.

SS316	Back	TS	L	P	E	W	H	Finish
SSGC301XX16S	Flat	-	45	16	19	26	45	S
SSGC301XX16B	Flat	-	45	16	19	26	45	B
SSGC306XX16S	Curved	38.1	45	16	19	26	45	S
SSGC303XX16S	Curved	42.4	45	16	19	26	45	S

ZINC	Back	D	L	P	E	W	H	Finish
SSGC301XXZMS	Flat	-	45	16	19	26	45	S
SSGC301XXZMB	Flat	-	45	16	19	26	45	B



Applicable Gaskets

PART #	Glass Thickness
SSGR30001RBN	6
SSGR30002RBN	8
SSGR30003RBN	10



Large Clips

SS316	Back	TS	L	P	E	W	H	Finish
SSGC431XX16S	Flat	-	55	24	20	35	55	S
SSGC431XX16B	Flat	-	55	24	20	35	55	B
SSGC433XX16S	Curved	42.4	55	24	20	35	55	S
SSGC437XX16S	Curved	50.8	55	24	20	35	55	S
SSGC431XXSET	Flat with Set Screw	-	55	18	20	28	55	S

ZINC	Back	TS	L	P	E	W	H	Finish
SSGC431XXZMS	Flat	-	55	24	20	35	55	S
SSGC431XXZMB	Flat	-	55	24	20	35	55	B



Applicable Gaskets

PART #	Glass Thickness
SSGR41001RBN	6
SSGR41002RBN	8
SSGR41003RBN	10
SSGR41004RBN	12

Square Glass Clips with Bottom Plate



S
Satin
Stainless
Steel

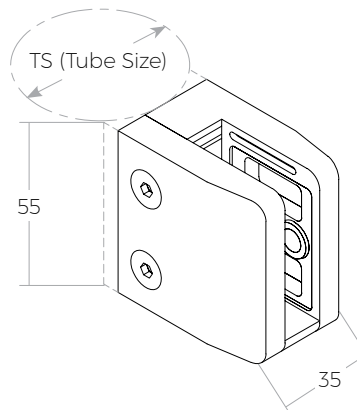
B
Powder
Coated
Satin Black

Square Clip
Flat Back




Installed on a Wall
or Square Tubing.

Square Clip
Curved Back



Distance from Glass
to Post/Wall

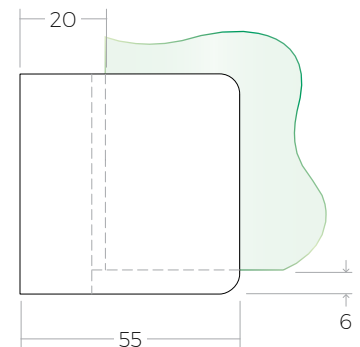


Large Clips Curved back available only in Satin.

SS316	Back	TS	L	E	W	H	Finish
SSGC411XX16S	Flat	-	55	20	35	55	S
SSGC411XX16B	Flat	-	55	20	35	55	B
SSGC413XX16S	Curved	42.4	55	20	35	55	S
SSGC417XX16S	Curved	50.8	55	20	35	55	S
ZINC	Back	TS	L	E	W	H	Finish
SSGC411XXZMS	Flat	-	55	20	35	55	S
SSGC411XXZMB	Flat	38.1	55	20	35	55	B



Applicable Gaskets

PART #	Glass Thickness
SSCR41001RBN	6
SSCR41002RBN	8
SSCR41003RBN	10
SSCR41004RBN	12

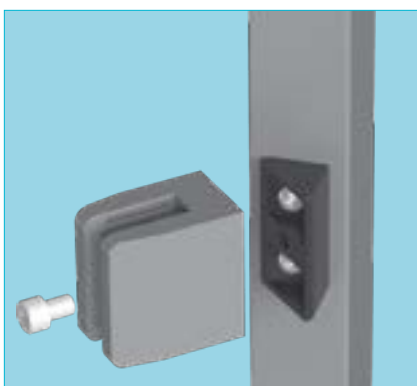

45° Wedge Adaptor

Compatible with all EAC Large Square Flat Back Glass Clips and other large Square Glass Clips. Features interchangeable configurations to accommodate inner angle (45°) and outer angle (135°).

S
Satin
Stainless
Steel



B
Powder
Coated
Satin Black

PART #	Finish
SSGC4314516S	S
SSGC4314516B	B

Hinged Glass Clip with Pin



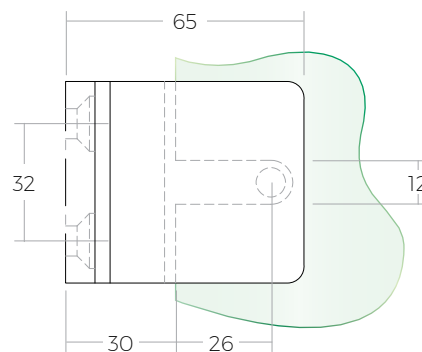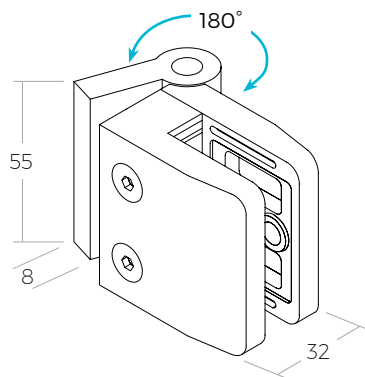S
Satin
Stainless
Steel




Large Hinged Clips

Two M8 Screws and Gaskets included.

SS316 Back
SSGCH40116S Flat


Thick Glass Application Clips




S
Satin
Stainless
Steel




Front View




Back View



With Pin



With Bottom Plate



Thick Glass Clips

SS316	Back	Glass Thickness	W
SSGC461XX16S	Flat	13.52 / 15 / 17.52	40
SSGC451XX16S	Flat	19 / 21.52	45






Applicable Gaskets

PART #	Glass Thickness
SSGR513RBN	13.52
SSGR515RBN	15
SSGR517RBN	17.52
SSGR519RBN	19
SSGR521RBN	21.52


Standard Ultra Slim Series

- Single Grub Screw.
- Made of **Duplex 2205**, which has superior strength and corrosion resistance than SS316.
- Minimum gap space between Panels represented by **G**.




Glass To Wall

PART #	Finish
SSPFEBWALL	S / B / GB / G

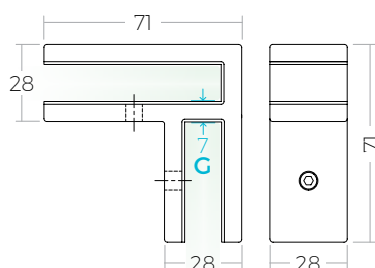


90° Glass to Glass

PART #	Finish
SSPFEB90	S / B / GB / G



180° Glass to Glass


PART #	Finish
SSPFEB180	S / B / GB / G

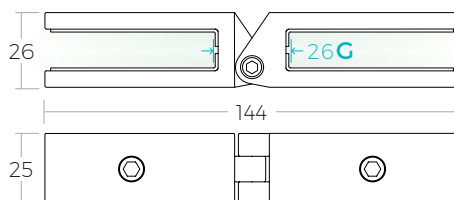

Adjustable Glass to Glass

PART #	Finish
SSPFEBADJ	S / B / GB / G

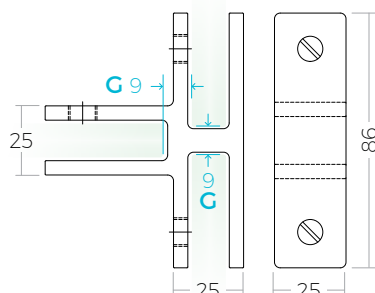Adjustment from 90° - 180°. Slide and rotate.
No screw assembly.



T-Connector Glass to Glass


PART #	Finish
SSPFEBT	S

Heavy Duty Ultra Slim Series




S
Satin
Stainless
Steel

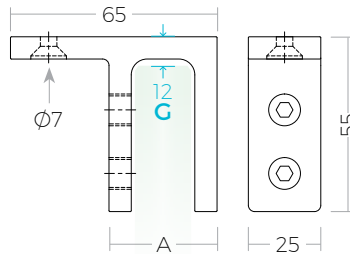- Gaskets included.
- Double Grub Screws.
- Made of **Duplex 2205**, which has superior strength and corrosion resistance than SS316.
- Minimum gap space between Panels represented by **G**.




Glass To Wall

PART #	A	Glass Thickness
SSPFEBWALL1	34	12-15.88mm
SSPFEBWALL2	40	16.76-21.52mm

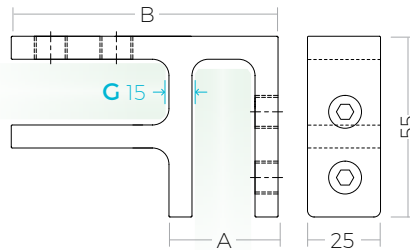


90° Glass to Glass

PART #	A	B	Glass Thickness
SSPFEB901	34	82	12-15.88mm
SSPFEB902	40	88	16.76-21.52mm



180° Glass to Glass

PART #	A	Glass Thickness
SSPFEB1801	34	12-15.88mm
SSPFEB1802	40	16.76-21.52mm

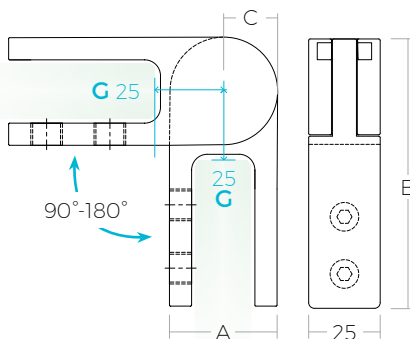




Adjustable Glass to Glass

PART #	A	B	C	Glass Thickness
SSPFEBADJ1	34	85	17	12-15.88mm
SSPFEBADJ2	40	91.5	20	16.76-21.52mm

Adjustment from 90° - 180°. Slide and rotate. No screw assembly.

Standard Glass Connectors

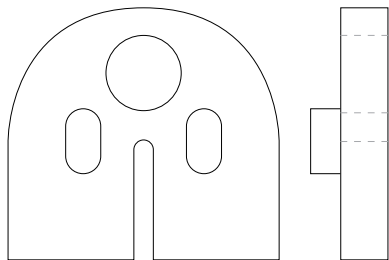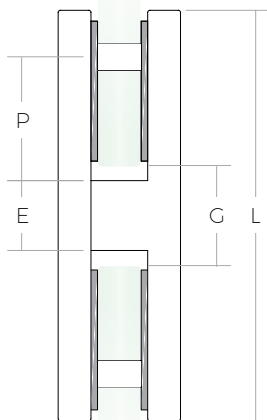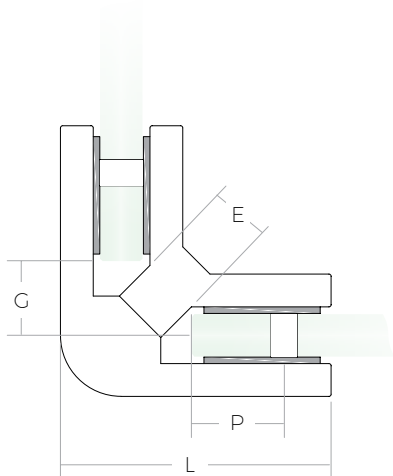- Accommodates **8-12mm**.
- Made of **SS316** Marine Grade Satin Stainless Steel.



Glass to Glass 90°

PART #	L	P	E	G
SSGC014XX16S	74	33	15.5	15

Glass to Glass 180°

PART #	L	P	E	G
SSGC015XX16S	106	30	14	19

Applicable Gasket

PART #	Glass Thickness
SSGR20002RBN	8
SSGR20003RBN	10
SSGR20004RBN	12





PHOTO: Airport Railings

Glass Railing Tops



PHOTO: Millan Glass & Mirror

WE GOT YOU COVERED! Cap your Glass Railings to function as a Railing, or simply protect the edges. Whether it's Stainless Steel or Aluminum, we offer Cap Rails in Round, Square, or Rectangular to suit your look. Aluminum Cap Rails are available in Brushed Clear and Brushed Black Anodized Aluminum. All Stainless Steel Cap Rails are available in Satin while some sizes are available in Powder Coated Satin Black. All sizes can be custom Powder Coated to your liking. Please contact us to inquire.



Stainless Steel Cap Rails & Fittings

- Cap Rails and Fittings are a high Grade Stainless Steel.
- All sizes available in Satin / Some sizes in Powder Coated Satin Black.
- Standard 19' lengths.
- Gaskets and full range of Fittings available.



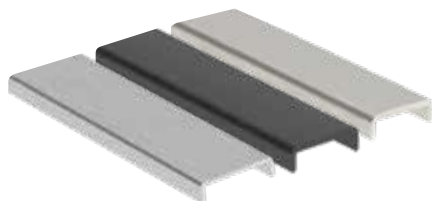
Aluminum Cap Rails & Fittings

- Anodized Aluminum 6063.
- Available in Brushed Clear, Brushed Black, and Satin Black Anodized Aluminum.
- Suitable for **10-21.52mm** Glass.
- Standard 19' lengths.
- Gaskets and full range of Fittings available.



Top Channels & Fittings

- Stainless Steel 316L Grade.
- Available in Satin. Inquire about Powder Coated Satin Black.
- Suitable for **10-19mm** Glass.
- 19' length; 1.2-3mm Wall thickness.
- Gaskets and full range of Fittings available.





Top Edge Covers

- Ultra slim edge design.
- Available in Brushed Clear and Brushed Black Anodized Aluminum, and SS316 Satin Stainless Steel.
- All finishes match our **Tilt-Lock™** Base Shoe line.
- Suitable for Interiors and Exterior installations.
- Suitable for **12-25.52mm** Glass.
- Wall Thickness: 1.5mm for Aluminum, 1mm for Stainless Steel.
- Standard 19' lengths.
- Adhesive strip included.

Round Stainless Steel Cap Rails & Fittings


- Gaskets available. See pg 102.



Ø42.4mm Cap Rail


PART #	L (Length)	SS Grade	Finish
SSUTRND4240S	19'	316	S
SSUTRND4240B	19'	304	B

Fittings




Swivel Horizontal Elbow

PART #	SS Grade	Finish
SSUTRND4241	Duplex 2205	S

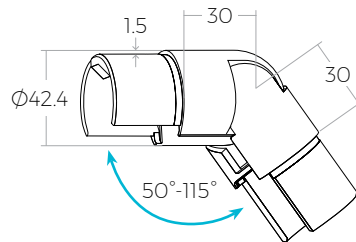


Swivel Vertical Elbow

PART #	SS Grade	Finish
SSUTRND4242	Duplex 2205	S




Horizontal 90° Elbow

PART #	SS Grade	Finish
SSUTRND4243	Duplex 2205	S



Straight Connector

PART #	SS Grade	Finish
SSUTRND4245	Duplex 2205	S






End Cap

PART #	SS Grade	Finish
SSUTRND4246S	316	S
SSUTRND4246B	304	B
SSUTRND4247 (with center hole)	316	S
SSUTRND4248S (Slotted)	316	S
SSUTRND4248B (Slotted)	316	B

Square Stainless Steel Cap Rails & Fittings

- Gaskets available. See pg 102.




40mm Cap Rail

PART #	L (Length)	SS Grade	Finish
SSUTSQ400S	19'	316	S
SSUTSQ400B	19'	304	B

Fittings


Swivel Vertical Elbow

PART #	SS Grade	Finish
SSUTSQ404S	Duplex 2205	S
SSUTSQ404B	316	B




Vertical 90° Elbow

PART #	SS Grade	Finish
SSUTSQ405S	Duplex 2205	S
SSUTSQ405B	316	B




Horizontal 90° Elbow

PART #	SS Grade	Finish
SSUTSQ403S	Duplex 2205	S
SSUTSQ403B	316	B




Straight Connector

PART #	SS Grade	Finish
SSUTSQ402S	Duplex 2205	S
SSUTSQ402B	316	B





End Cap

PART #	SS Grade	Finish
SSUTSQ401S	316	S
SSUTSQ401B	304	B
SSUTSQ406S (Slotted)	316	S
SSUTSQ406B (Slotted)	316	B

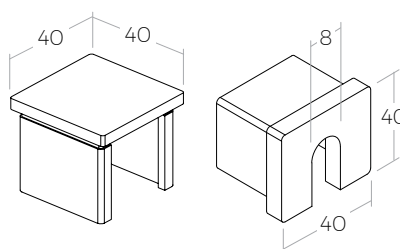

Rectangular Stainless Steel Cap Rails

Gaskets available. See pg 102.



40mm Cap Rail

PART #	L (Length)	SS Grade	Finish
SSUTREC400	19'	316	S
SSUTREC400B	19'	316	B

Fittings

Swivel Horizontal Elbow

PART #	SS Grade	Finish
SSUTREC402	Duplex 2205	S

Swivel Vertical Elbow

PART #	SS Grade	Finish
SSUTREC403	Duplex 2205	S

Horizontal 90° Elbow

PART #	SS Grade	Finish
SSUTREC404	Duplex 2205	S

Straight Connector

PART #	SS Grade	Finish
SSUTREC405	Duplex 2205	S







Wall Brackets

PART #	SS Grade	Finish
SSUTREC406 (with hole)	Duplex 2205	S
SSUTREC407 (with tab)	Duplex 2205	S

Can be affixed to Wall or Post.

End Cap


PART #	SS Grade	Finish
SSUTREC401	Duplex 2205	S
SSUTREC401B	316	B

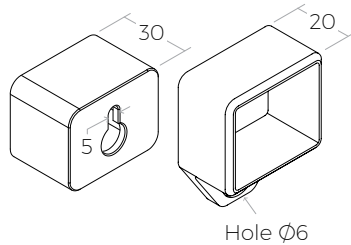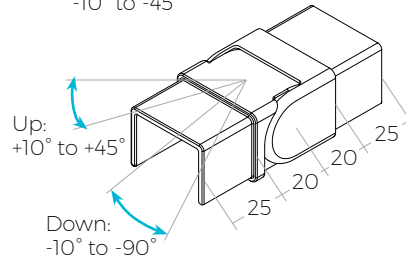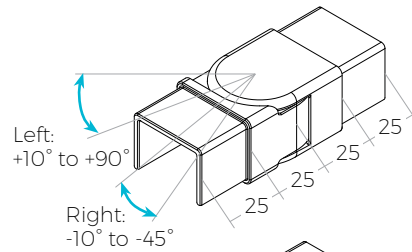



Gaskets

- Suits Cap Rails with 24x24mm slots.




PART #	Glass Size (mm)	Length
SSUTCASKET1	8-10	19'
SSUTCASKET2	12-13.52	19'
SSUTCASKET2A	15	19'
SSUTCASKET3	16-17.52	19'
SSUTCASKET3A	19	19'
SSUTCASKET4	20-21.52	19'



Aluminum Cap Rails

- Anodized Aluminum 6063.
- Standard 19' lengths.
- Gaskets and full range of Fittings available.
- **NO WELDING REQUIRED** using our recommended SSRK-1500 Adhesive.


A Brushed Clear Anodized Aluminum	B Brushed Black Anodized Aluminum	SB Satin Black Anodized Aluminum
---	---	--



Round

PART #	Finish
SSUTALROCA	A
SSUTALROB	B


Choose Gasket (pg 107) to accommodate your Glass size.



Square

PART #	Finish
SSUTALSOCA	A
SSUTALSOB	B
SSUTALSOSB	SB

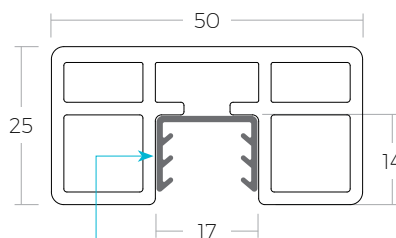Choose Gasket (pg 107) to accommodate your Glass size.



Rectangular

PART #	Finish
SSUTALRECOCA	A
SSUTALRECOB	B
SSUTALRECOB	SB

1/2" Gasket included to accommodate 10-13.52mm Glass

End Caps & Wall Brackets

A	B	SB
Brushed Clear Anodized Aluminum	Brushed Black Anodized Aluminum	Satin Black Anodized Aluminum




Round End Cap

PART #	Finish
SSUTALR1CA	A
SSUTALR1B	B

Wall Bracket

PART #	Finish
SSUTALR2CA	A
SSUTALR2B	B

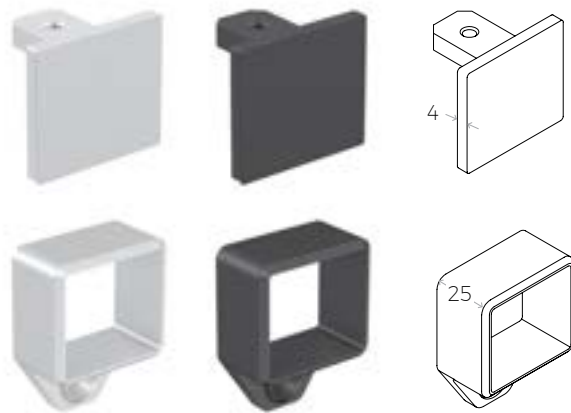


Square End Cap

PART #	Finish
SSUTALS1CA	A
SSUTALS1B	B
SSUTALS1SB	SB

Wall Bracket

PART #	Finish
SSUTALS2CA	A
SSUTALS2B	B
SSUTALS2SB	SB

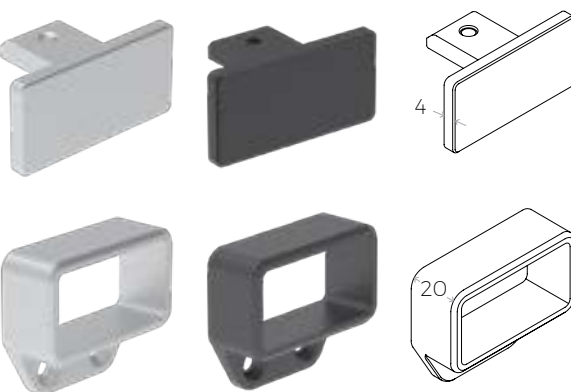

Rectangular End Cap

PART #	Finish
SSUTALREC1CA	A
SSUTALREC1B	B
SSUTALREC1SB	SB






Wall Bracket

PART #	Finish
SSUTALREC2CA	A
SSUTALREC2B	B
SSUTALREC2SB	SB

Connectors & Handrail Adapter Kit

Connectors

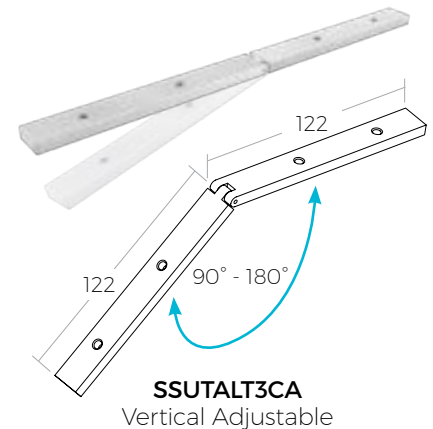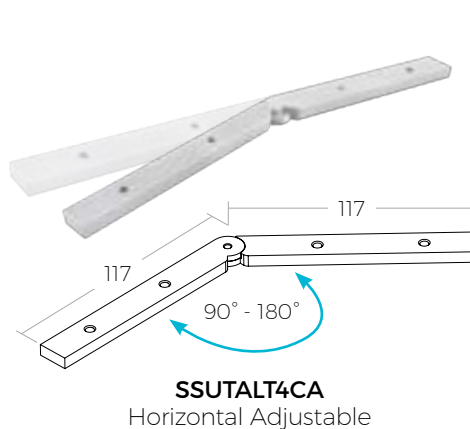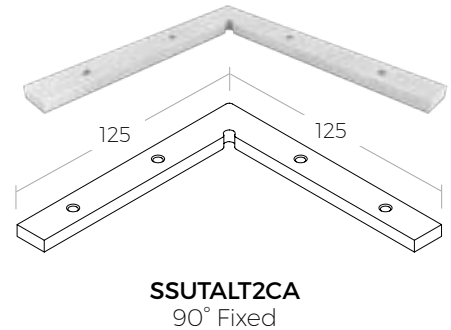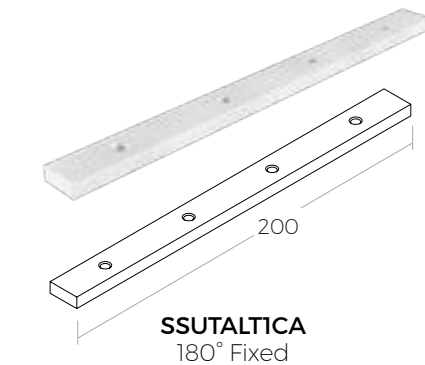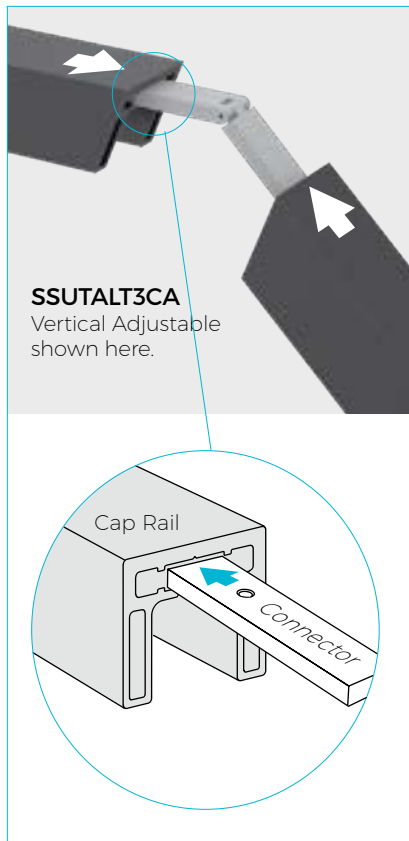- Connectors are inserted into the top slot of the Cap Rails to connect them together.
- Mitre Cap Rail ends to required angle, slide Connectors in place, push Cap Rails to fit. Tighten Connector Screws on both sides.
- Brushed Clear Anodized Aluminum. Used with either Round, Square, or Rectangular Aluminum Cap Rails for both finishes.






Handrail Adapter Kit

SSUTALT5: Easily convert your Aluminum Cap Rail into a Handrail with the Handrail Adapter Kit. Choose your Handrail Bracket for either Off-the-wall or Off-the-glass. Can also be used with LumaRail. (pg 163).

Kit Includes:



- Saddle (1pc).
- Rectangular Nut (2pcs).
- M6 Screws (2pcs).

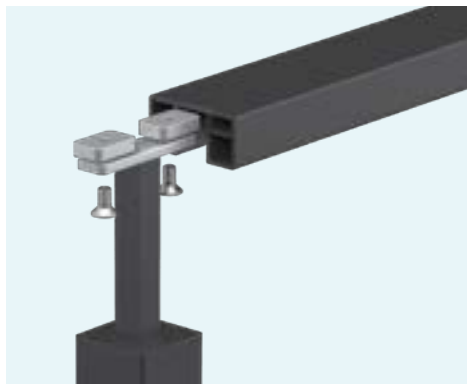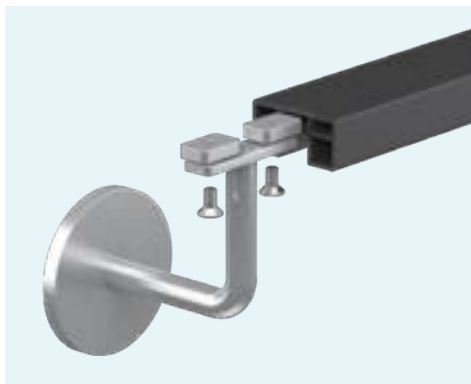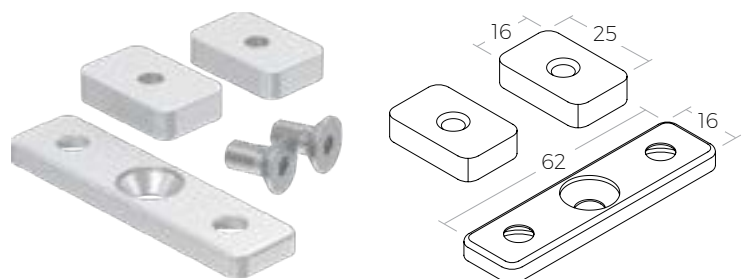Various applications demonstrated below:



Top Channels & Fittings

- Powder Coated Satin Black available. Please inquire.
- **NO WELDING REQUIRED** using our recommended SSRK-1500 Adhesive.



25x21mm Top Channel Rail


PART #	L (Length)	SS Grade	Finish
SSUTCH100S	19'	316	S



Gaskets

PART #	Glass Thickness	Length
SSUTCH101	10-11	19'
SSUTCH102	12	19'

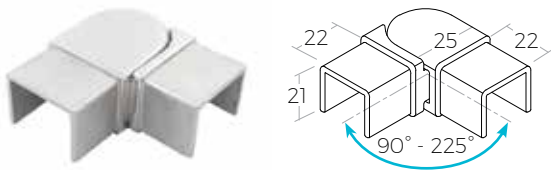Fittings





Swivel Horizontal Elbow

PART #	SS Grade	Finish
SSUTCH103S	Duplex 2205	S



Swivel Vertical Elbow

PART #	SS Grade	Finish
SSUTCH104S	Duplex 2205	S

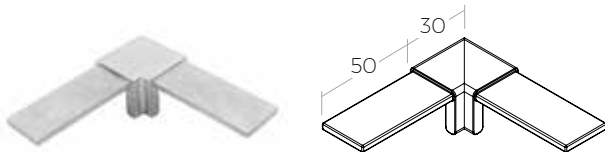



Horizontal 90° Elbow

PART #	SS Grade	Finish
SSUTCH105S	Duplex 2205	S



Straight Connector

PART #	SS Grade	Finish
SSUTCH106S	Duplex 2205	S




Wall Brackets - Affix to Wall or Post.

PART #	SS Grade	Finish
SSUTCH108S (with hole)	Duplex 2205	S
SSUTCH109S (with tab)	Duplex 2205	S




End Cap

PART #	SS Grade	Finish
SSUTCH107S	Duplex 2205	S





Stabilizing End Cap

PART #	SS Grade	Finish
SSUTCH107XS	Duplex 2205	S
SSUTCH107XB	Duplex 2205	B



Heavy Duty Top Channels & Fittings

- Powder Coated Satin Black available. Please inquire.
- **NO WELDING REQUIRED** using our recommended SSRK-1500 Adhesive.




30x27mm Top Channel Rail

PART #	L (Length)	SS Grade	Finish
SSUTCH300	19'	316	S

Gaskets


PART #	Glass Thickness	Length
SSUTCASKET1	8-11	19'
SSUTCASKET2	12-13.52	19'
SSUTCASKET2A	15	19'
SSUTCASKET3	16-17.52	19'
SSUTCASKET3A	19	19'
SSUTCASKET4	20-21.52	19'

Fittings




Horizontal 90° Elbow

PART #	SS Grade	Finish
SSUTCH303	316	S



Solid End Cap

PART #	SS Grade	Finish
SSUTCH301	316	S



Stabilizing End Cap

Connect to Wall through slot using 1/4" Fasteners.

PART #	SS Grade	Finish
SSUTCH302	316	S

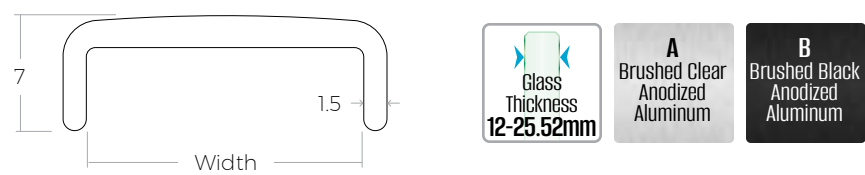


Top Edge Covers

Edge Protection for Glass Railings

- Ultra Slim edge design.
- Brushed Clear & Brushed Black Anodized Aluminum and SS316 Satin Stainless Steel options available.
- All finishes match our Tilt-Lock™ Base Shoe line.
- Suitable for Interior and Exterior installations.
- Suitable for Glass thicknesses **12-25.52mm**.
- Wall Thickness: 1.5mm for Aluminum, 1mm for Stainless Steel.
- Standard 19' lengths (5800mm).
- Adhesive strip included.

Anodized Aluminum




PART #	Width	Glass Thickness	Finish
SSUTCH230A	15	12-14.28	A
SSUTCH230B	15	12-14.28	B
SSUTCH231A	18	15-17.52	A
SSUTCH231B	18	15-17.52	B
SSUTCH232A	22	19-21.52	A
SSUTCH232B	22	19-21.52	B
SSUTCH233A	26	25.52	A
SSUTCH233B	26	25.52	B




Glass Railing Tops


Stainless Steel



PART #	Width	Glass Thickness	Finish
SSUTCH212	14	12-13.52	S
SSUTCH217	18	15-17.52	S
SSUTCH221	22	19-21.52	S

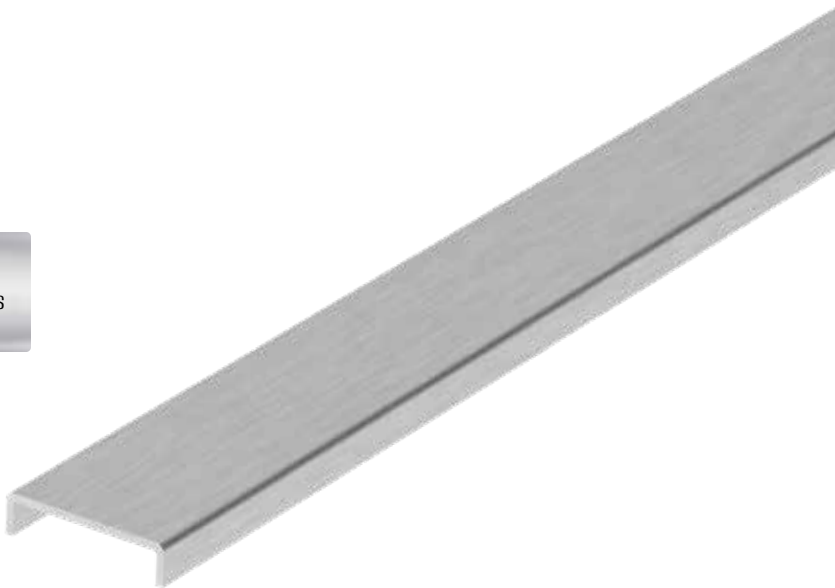

Tubing, Rods, Flat Bars & Tube Fittings

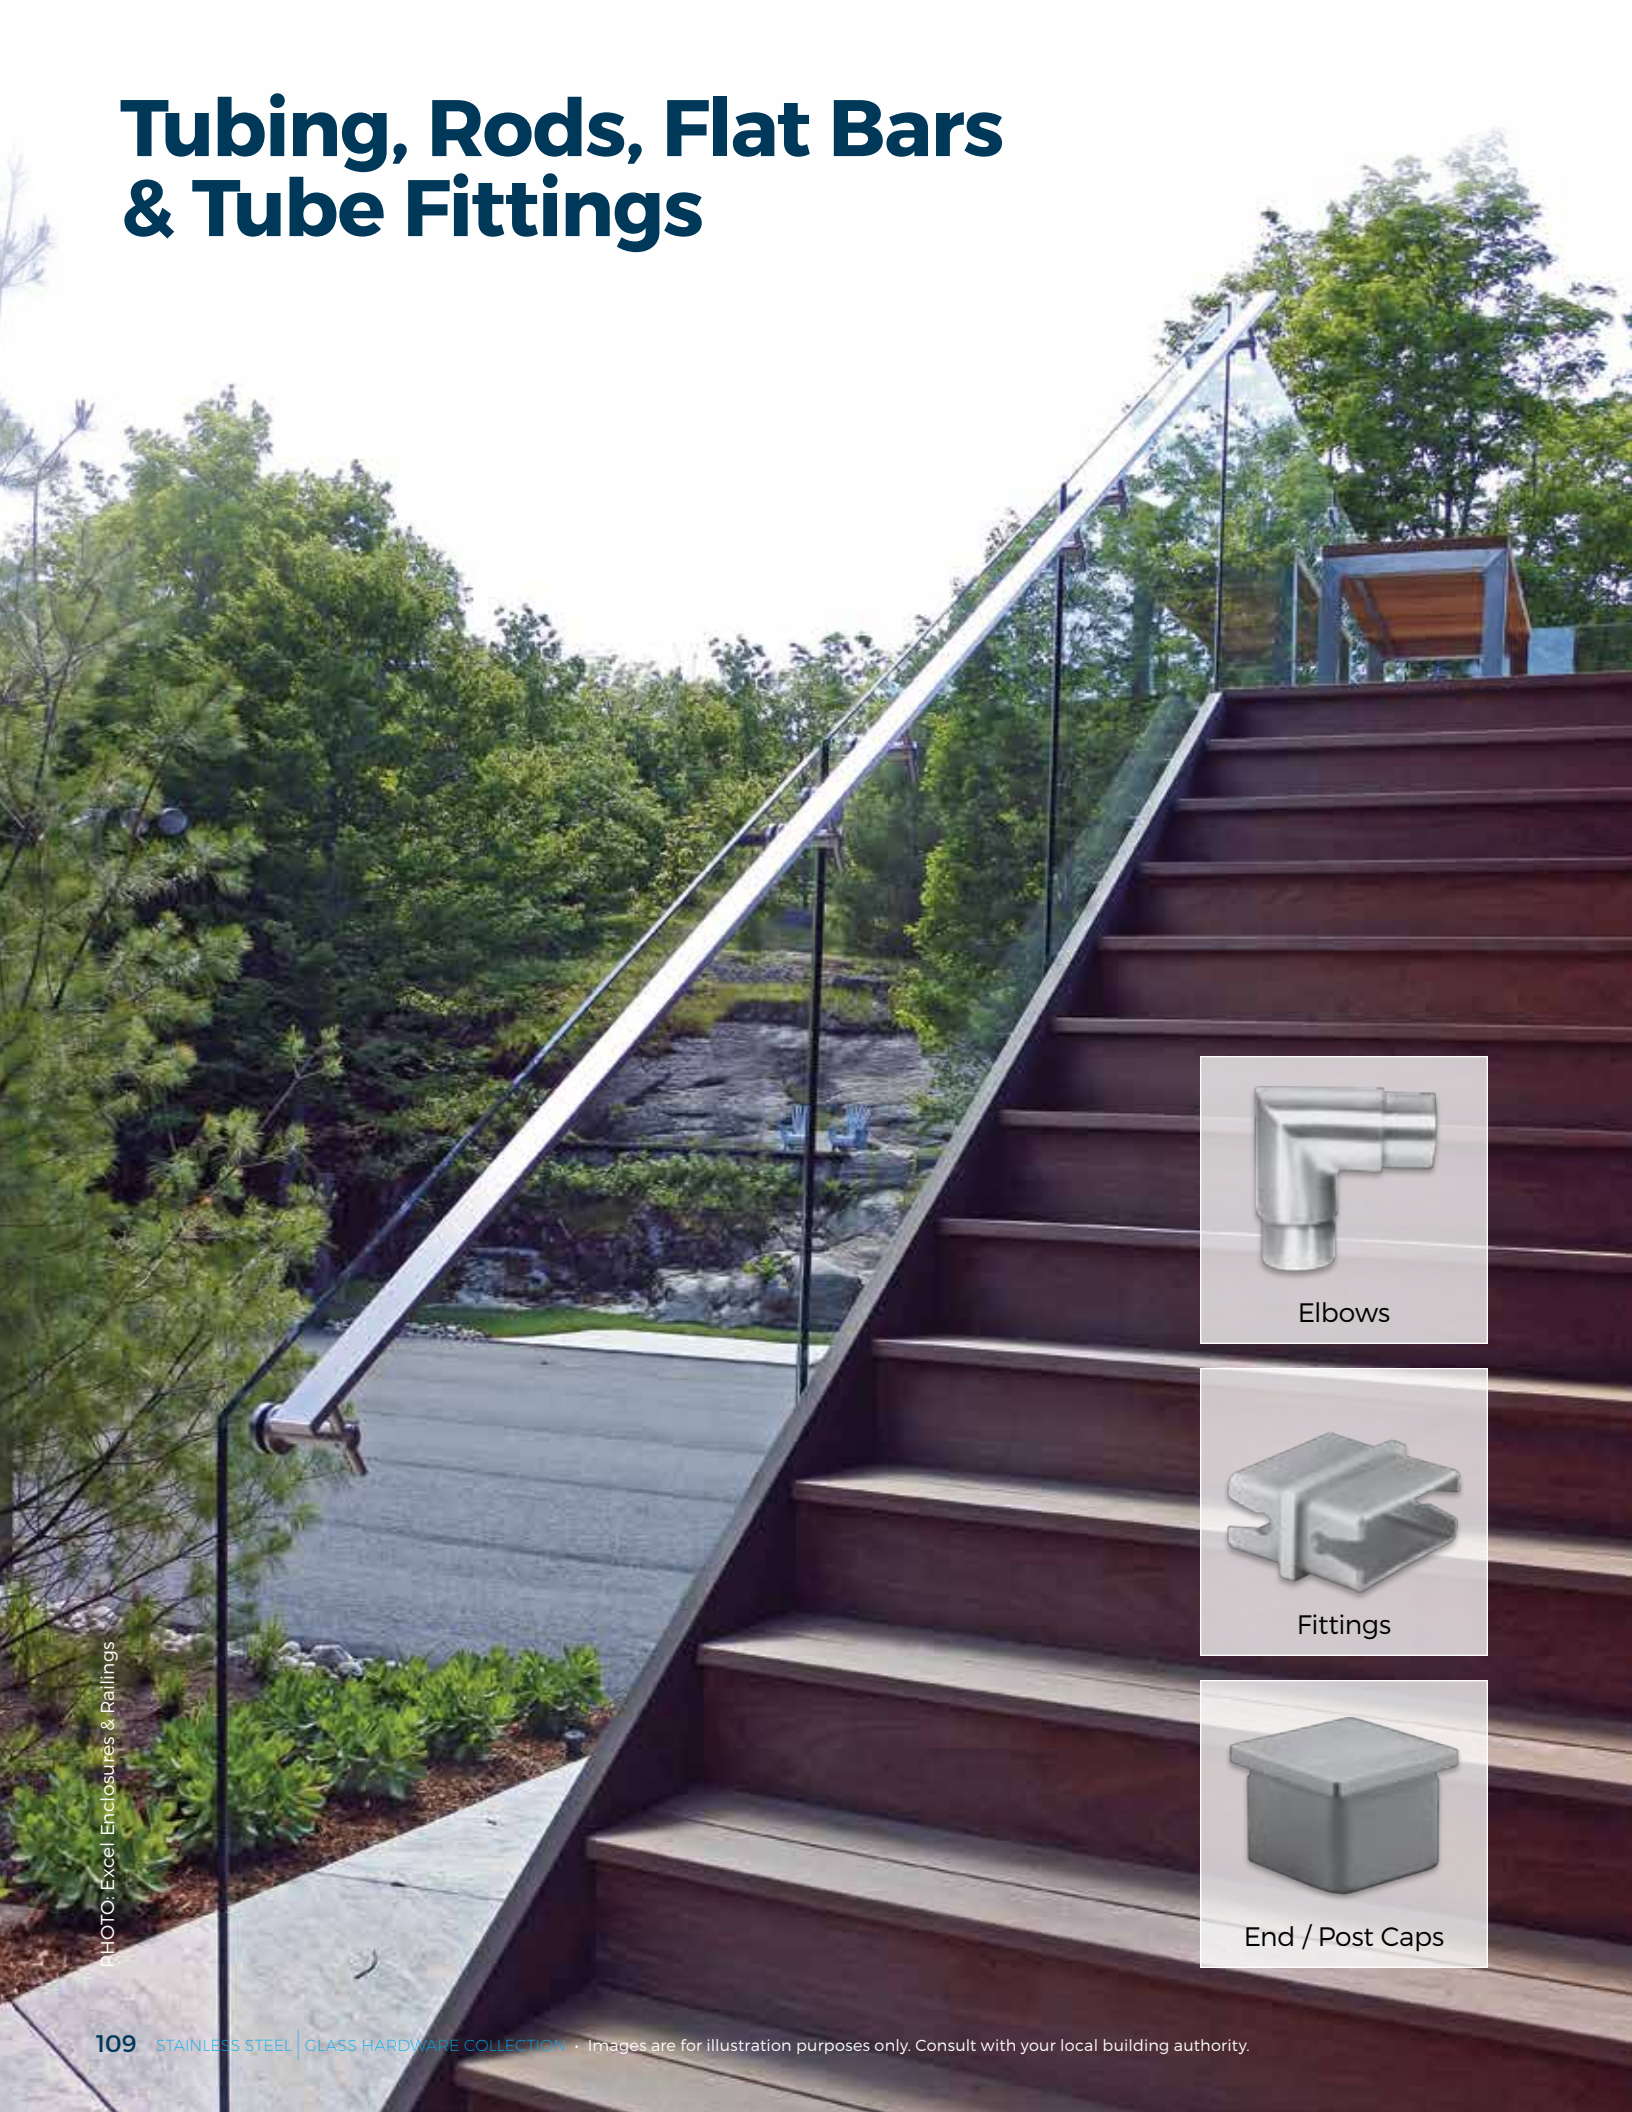

Elbows



Fittings



End / Post Caps

Tubes



Round 19' Lengths

PART #	ØD	Wall Thickness	SS Grade	Finish
SST1215304	1/2"	1.5	304	S
SST5815304	5/8"	1.5	304	S
SST3415304	3/4"	1.5	304	S
SST11215304	1 1/2"	1.5	304	S
SST11215316	1 1/2"	1.5	316	S
SST1662304	1.66"	2.0	304	S
SST1662304B	1.66"	2.0	304	B
SST1662316	1.66"	2.0	316	S
SST215304	2"	1.5	304	S



Square 19' Lengths

PART #	W	Wall Thickness	SS Grade	Finish
SSTSQ1215304	1/2"	1.5	304	S
SSTSQ3415304	3/4"	1.5	304	S
SSTSQ402304	40	2.0	304	S
SSTSQ402304B	40	2.0	304	B
SSTSQ402316	40	2.0	316	S
SSTSQ22304	2"	2.0	304	S



Rectangular 19' Lengths

PART #	W x H	Wall Thickness	SS Grade	Finish
SSTREC11212	1 1/2" x 1/2"	1.5	316	S
SSTREC5010	50 x 10	1.5	316L	S
SSTREC212	2" x 1/2"	1.5	316	S
SSTREC21	2" x 1"	1.5	316	S
SSTREC21B	2" x 1"	1.5	316	B

Rods / Bars



Round 19' Lengths

PART #	ØD	Wall Thickness	SS Grade	Finish
SSROD12304	1/2"	N/A	304	S



Square 19' Lengths

PART #	W	Wall Thickness	SS Grade	Finish
SSRODSQ12304	1/2"	N/A	304	S




Rectangular 19' Lengths

PART #	W x H	Wall Thickness	SS Grade	Finish
SSFB212304	2" x 1/2"	N/A	304	S

Round Tubing Fittings


ØD = Diameter of Tube Applied • WT = Wall Thickness of Tube Applied • L = Length
 38.1mm = 1½" • 42.4mm = 1.66" • 50.8mm = 2"



Round Tube

19' Lengths


PART #	ØD (Tube Dia)	WT	SS Grade	Finish
SST1215304	12.7 (1/2")	1.5	304	S
SST5815304	15.85 (5/8")	1.5	304	S
SST3415304	19.05 (3/4")	1.5	304	S
SST11215304	38.1 (1 1/2")	1.5	304	S
SST11215316	38.1 (1 1/2")	1.5	316	S
SST1662304	42.4 (1.66")	2.0	304	S
SST1662304B	42.4 (1.66")	2.0	304	B
SST1662316	42.4 (1.66")	2.0	316	S
SST215304	50.8 (2")	1.5	304	S



Elbows for Round Tube


Sharp 90°

PART #	ØD (Tube Dia)	WT	L	SS Grade
SSEB1040316S	38.1	1.5	45	316
SSEB1020116S	42.4	2.0	50	316




Soft 90°

PART #	ØD (Tube Dia)	WT	L	SS Grade
SSEB2040316S	38.1	1.5	45	316
SSEB2020116S	42.4	2.0	50	316



Round 90°


PART #	ØD (Tube Dia)	WT	L	SS Grade
SSEB3040316S	38.1	1.5	45	316
SSEB3020116S	42.4	2.0	50	316
SSEB3021116S	42.4	2.0	65	316
SSEB3050316S	50.8	1.5	70	316



Capped Elbow


PART #	ØD (Tube Dia)	WT	L	SS Grade
SSEB1340316S	38.1	1.5	45	316
SSEB1320116S	42.4	2.0	50	316
SSEB1350316S	50.8	1.5	70	316

A = Angle • ϕD = Diameter of Tube Applied • WT = Wall Thickness of Tube Applied • L = Length
38.1mm = 1½" • 42.4mm = 1.66" • 50.8mm = 2"




Angled

PART #	A	ϕD (Tube Dia)	WT	L	SS Grade
SSEB4040304S	135°	38.1	1.5	35	304
SSEB4020116S	135°	42.4	2.0	38	316
SSEB4140316S	147°	38.1	1.5	35	316
SSEB4120116S	147°	42.4	2.0	38	316




Rotating

PART #	ϕD (Tube Dia)	WT	L	SS Grade
SSEB7040304S	38.1	1.5	38.5	304
SSEB7020104S	42.4	2.0	45	304




Flexible 90

PART #	ϕD (Tube Dia)	WT	L	SS Grade
SSEB8040316S	38.1	1.5	24	316
SSEB8020116S	42.4	2.0	27	316
SSEB8050316S	50.8	1.5	32	316




Flexible 50

PART #	ϕD (Tube Dia)	WT	SS Grade
SSEBLNDFLUSH	42.4	2.0	316

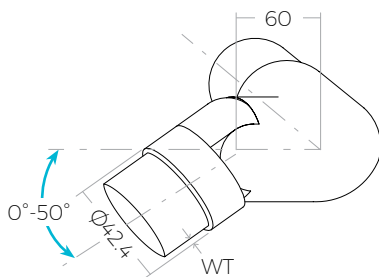

Swivel Left

PART #	ϕD (Tube Dia)	WT	SS Grade
SSEBLNDLEFT	42.4	2.0	316

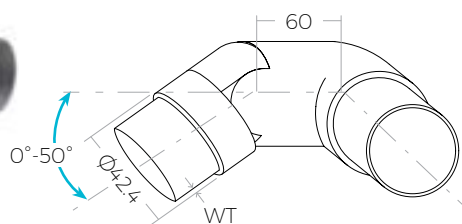


Swivel Right


PART #	ϕD (Tube Dia)	WT	SS Grade
SSEBLNDRIGHT	42.4	2.0	316

Fittings for Round Tubing

ØD = Diameter of Cap and Tube Applied • WT = Wall Thickness of Tube Applied
 38.1mm = 1½" • 42.4mm = 1.66" • 50.8mm = 2"




End / Post Caps for Round Tubes




Flat

PART #	ØD	WT	SS Grade	Finish
SSEP0012416S	38.1	1.5	316	S
SSEP0010216S	42.4	2.0	316	S
SSEP001021B	42.4	2.0	304	B
SSEP0012516S	50.8	1.5	316	S




Flat with Threaded Hole

PART #	ØD	WT	SS Grade	Finish
SSEP0022404S	38.1	1.5	304	S
SSEP0020216S	42.4	2.0	316	S



Curved

PART #	ØD	WT	SS Grade	Finish
SSEP0032416S	38.1	1.5	316	S
SSEP0030216S	42.4	2.0	316	S
SSEP0032504S	50.8	1.5	304	S



Domed



PART #	ØD	WT	SS Grade	Finish
SSEP0072416S	38.1	1.5	316	S
SSEP0070216S	42.4	2.0	316	S
SSEP0072516S	50.8	1.5	316	S

ØD = Diameter of Tube Applied • WT = Wall Thickness of Tube Applied • L = Length
38.1mm = 1½" • 42.4mm = 1.66" • 50.8mm = 2"

Connectors for Round Tubes


Straight

PART #	ØD	WT	SS Grade	Finish
SSEB9040316S	38.1	1.5	316	S
SSEB9020116S	42.4	2.0	316	S
SSEB9050316S	50.8	1.5	316	S

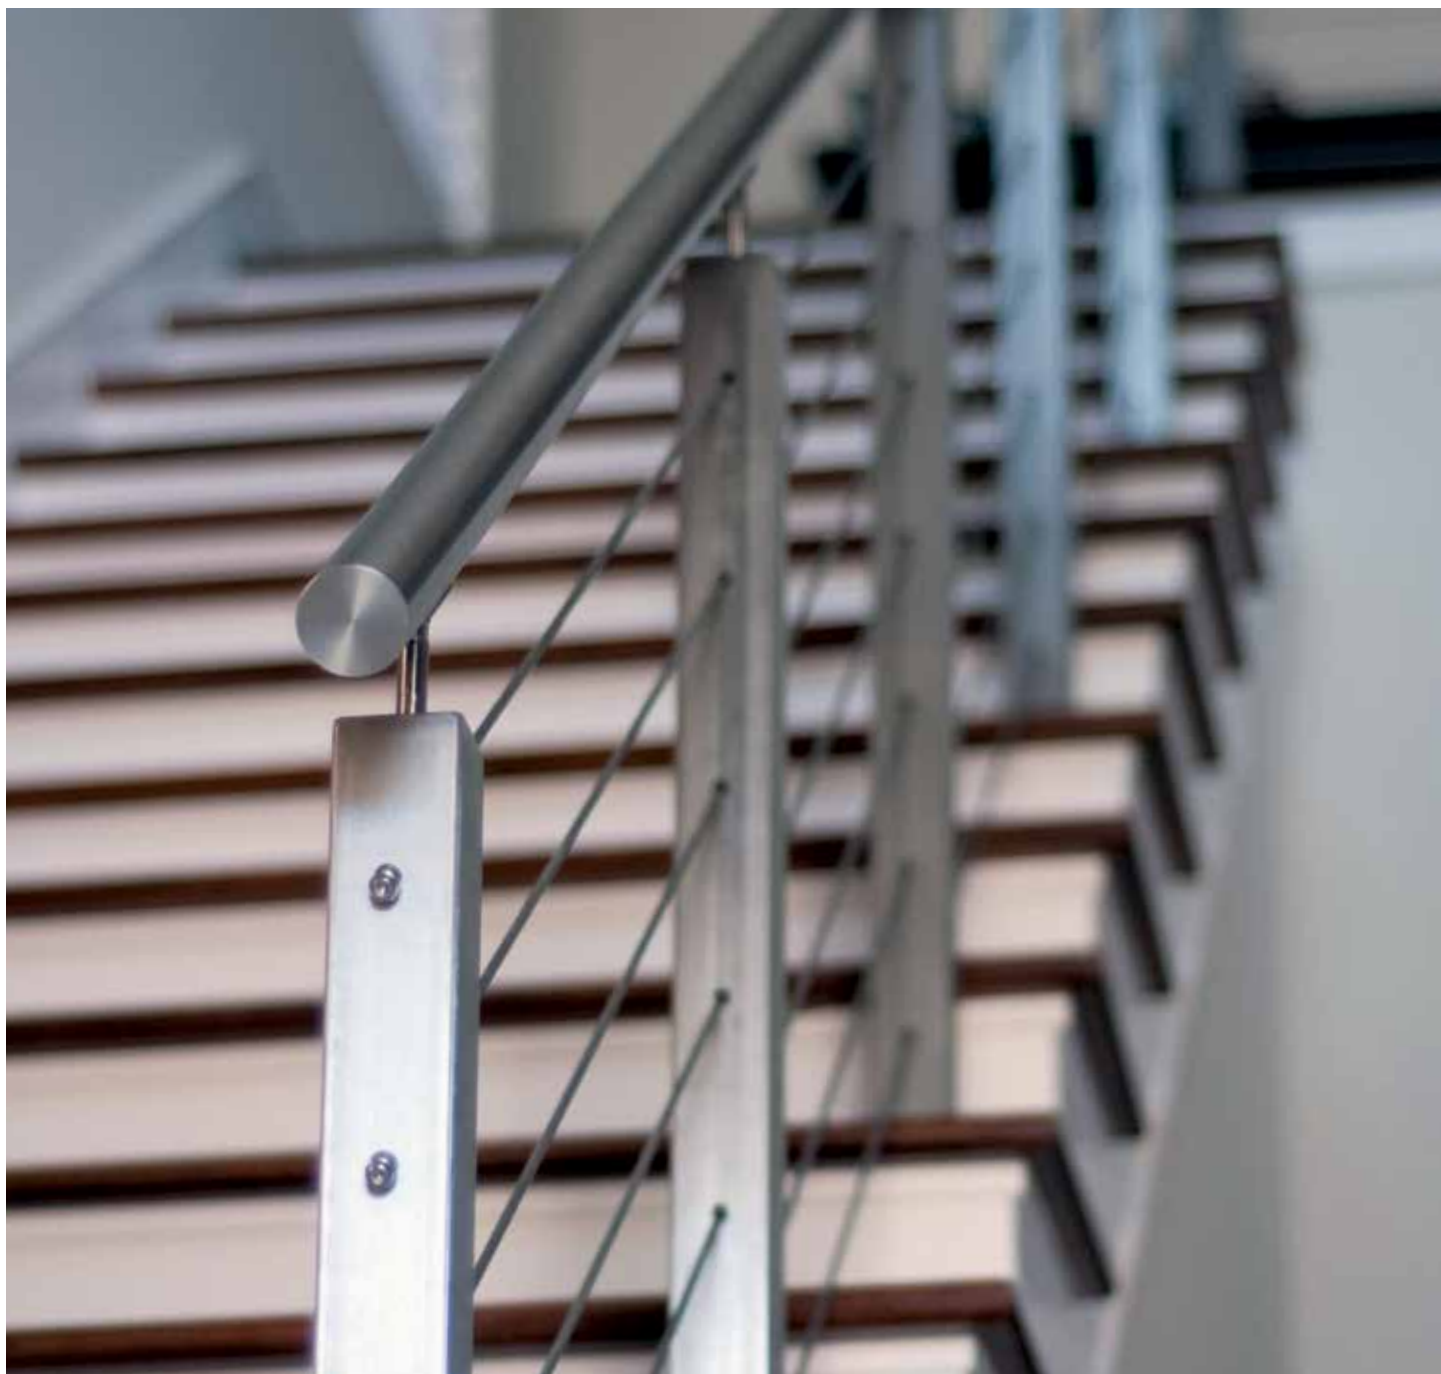

Square Tubing & Fittings

OD = Outer Dimensions of Tube · WT = Wall Thickness of Tube Applied
 38.1mm = 1½" · 42.4mm = 1.66" · 50.8mm = 2"



Square Tube

19' Lengths

PART #	W x H	WT	SS Grade	Finish
SSTSQ402304	40 x 40	2.0	304	S
SSTSQ402304B	40 x 40	2.0	304	B
SSTSQ402316	40 x 40	2.0	316	S
SSTSQ22304	50 x 50	2.0	304	S

Fittings For Square Tube Above

90° Fixed Elbow

PART #	W x H	WT	SS Grade	Finish
SSZE0404016S	40 x 40	2.0	316	S
SSZE0404016B	40 x 40	2.0	316	B

90° - 180° Swivel Elbow

PART #	W x H	WT	SS Grade	Finish
SSZE1404016S	40 x 40	2.0	316	S
SSZE1404016B	40 x 40	2.0	316	B

180° Straight Connector






PART #	W x H	WT	SS Grade	Finish
SSZE0404116S	40 x 40	2.0	316	S
SSZE0404116B	40 x 40	2.0	316	B

Flat Cap

PART #	W x H	WT	SS Grade	Finish
SSZP0404016S	40 x 40	2.0	316	S
SSZP0404016B	40 x 40	2.0	304	B
SSZP0505016S	50 x 50	2.0	316	S


Flat Cap with Threaded Hole

PART #	W x H	WT	SS Grade	Finish
SSZP0600116S	40 x 40	2.0	316	S

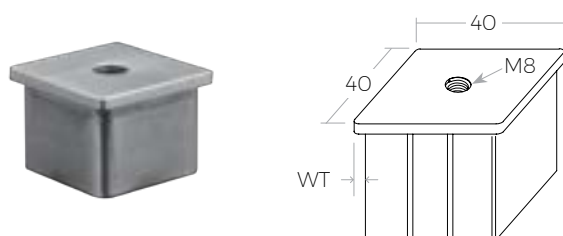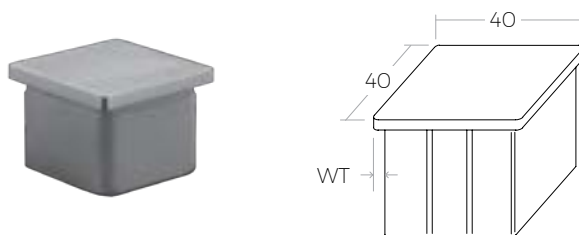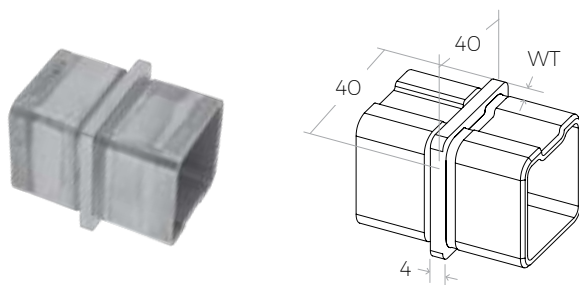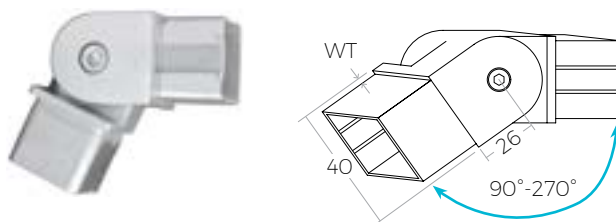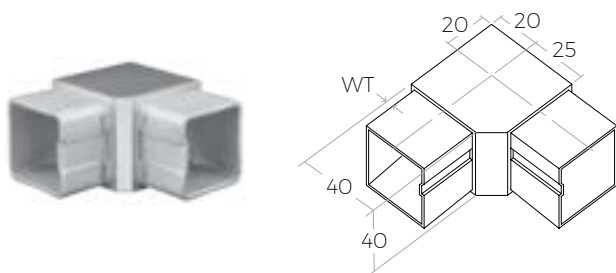

Standard Rectangular Tubing & Fittings

OD = Outer Dimensions of Tube · WT = Wall Thickness of Tube Applied
 38.1mm = 1½" · 42.4mm = 1.66" · 50.8mm = 2"



Standard Rectangular Tube

19' Lengths

PART #	W x H	WT	SS Grade	Finish
SSTREC11212	38 x 12.7 (1 1/2" x 1/2")	1.5	316	S
SSTREC212	50.8 x 12.7 (2" x 1/2")	1.5	316	S
SSTREC21	50.8 x 25.4 (2" x 1")	1.5	316	S
SSTREC21B	50.8 x 25.4 (2" x 1")	1.5	304	B

Fittings For Rectangular Tube Above

2" x 1" 90° Fixed Horizontal Elbow

PART #	W x H	WT	SS Grade	Finish
SSEBREC2101	50 x 25 (2" x 1")	1.5	316	S
SSEBREC211B	50 x 25 (2" x 1")	1.5	316	B

2" x 1" Horizontal Fixed 90° - 180° Elbow

PART #	W x H	WT	SS Grade	Finish
SSEBREC215S	50 x 25 (2" x 1")	1.5	316	S
SSEBREC215B	50 x 25 (2" x 1")	1.5	316	B

2" x 1" Vertical Fixed 90° Elbow

PART #	W x H	WT	SS Grade	Finish
SSEBREC214S	50 x 25 (2" x 1")	1.5	316	S
SSEBREC214B	50 x 25 (2" x 1")	1.5	316	B

2" x 1" 90° - 180° Vertical Swivel Elbow

PART #	W x H	WT	SS Grade	Finish
SSEBREC210S	50 x 25 (2" x 1")	1.5	316	S
SSEBREC213B	50 x 25 (2" x 1")	1.5	316	B

2" x 1" 180° Straight Connector


PART #	W x H	WT	SS Grade	Finish
SSEBREC210S	50 x 25 (2" x 1")	1.5	316	S
SSEBREC212B	50 x 25 (2" x 1")	1.5	316	B

Flat Cap

PART #	OD (L x W)	WT	SS Grade	Finish
SSEPREC11212	38 x 12.7 (1 1/2" x 1/2")	1.5	316	S
SSEPREC212	50.8 x 12.7 (2" x 1/2")	1.5	316	S
SSEPREC21S	50.8 x 25.4 (2" x 1")	1.5	316	S
SSEPREC21B	50.8 x 25.4 (2" x 1")	1.5	304	B


2" X 1" Wall Bracket

PART #	W x H	WT	SS Grade	Finish
SSEBREC216S	50 x 25 (2" x 1")	1.5	316	S
SSEBREC216B	50 x 25 (2" x 1")	1.5	316	B

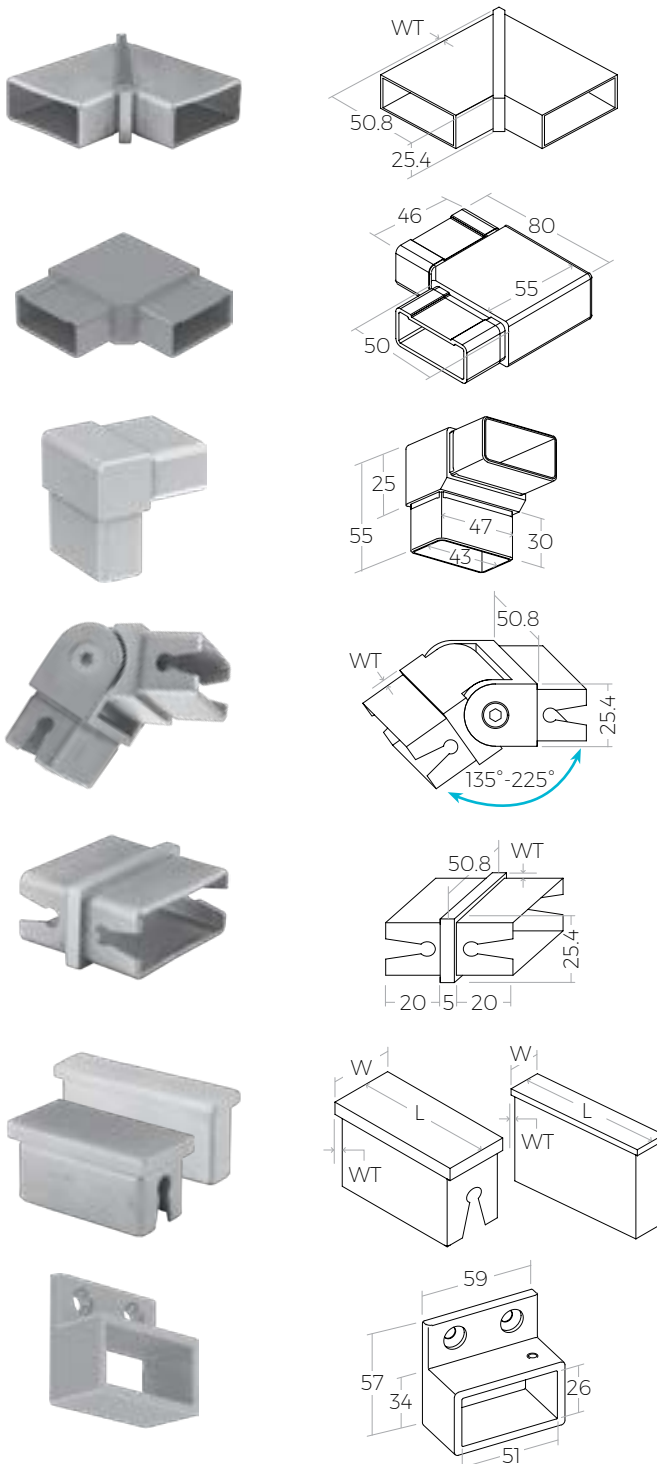

Slim Line Rectangular Tubing & Fittings

OD = Outer Dimensions of Tube · WT = Wall Thickness of Tube Applied
38.1mm = 1½" · 42.4mm = 1.66" · 50.8mm = 2"



S
Satin
Stainless
Steel



Slim Line Rectangular Tube

- Powder Coated Satin Black available. Please inquire.
- NO WELDING REQUIRED using our recommended SSRK-1500 Adhesive.

19' Lengths

PART #	OD (W x H)	WT	SS Grade	Finish
SSTREC5010	50 x 10	1.5	316	S

Fittings For Slim Line Tube Above

90° - 180° Swivel Horizontal Elbow

PART #	OD (W x H)	WT	SS Grade	Finish
SSEBREC501	50 x 10	1.5	2205	S

90° - 180° Swivel Vertical Elbow

PART #	OD (W x H)	WT	SS Grade	Finish
SSEBREC502	50 x 10	1.5	2205	S

Tack weld on Hinge is recommended for +/-10° angles.

90° Fixed Horizontal Elbow

PART #	OD (W x H)	WT	SS Grade	Finish
SSEBREC503	50 x 10	1.5	2205	S

90° Straight Connector

PART #	OD (W x H)	WT	SS Grade	Finish
SSEBREC504	50 x 10	1.5	2205	S

End Cap

PART #	OD (W x H)	WT	SS Grade	Finish
SSEPREC501	50 x 10	1.5	2205	S

Wall Bracket with Tab

PART #	ID (W x H)	SS Grade	Finish
SSEPREC502	51 x 11	2205	S



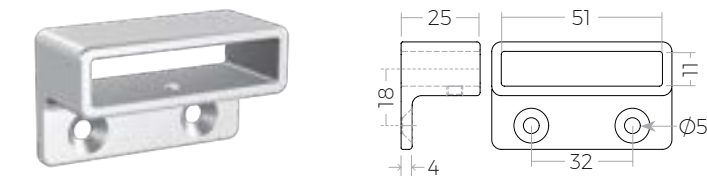
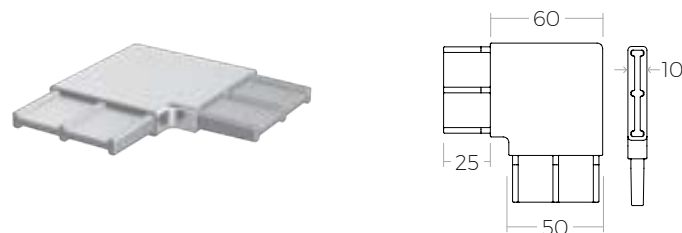




PHOTO: Sierra Glass

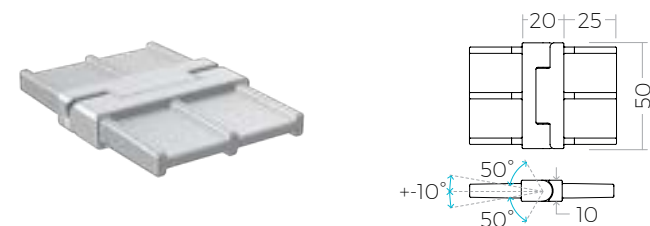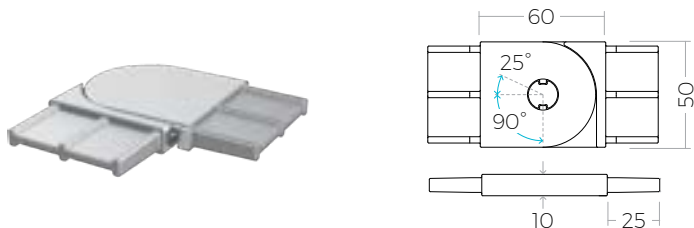Handrail Components





Attachment Plates



Tube Supports



Handrail Brackets

Our Handrail Components are available for both Round and Square applications. They consist of Handrail Attachment Plates, Tube Supports, Elbows, End Caps, and Post Caps. We also offer a large variety of Handrail Brackets for Off-the-Wall, Off-the-Glass, or Off-the-Post applications. They are made of durable 316 Grade Stainless Steel all available in Satin finish **(S)**, with some available in PVD Brushed Graphite Black **(CB)**, Powder Coated Satin Black **(B)**, and PVD Brushed Gold **(C)**


Round Handrail Bracket Series:

- Standard
- Standard Concealed
- Standard Welded
- Height Adjustable
- Heavy Duty
- Modern / Length Adjustable


Square Handrail Bracket Series:

- Standard
- Standard Concealed
- Height Adjustable
- Heavy Duty

Handrail Attachment Plates




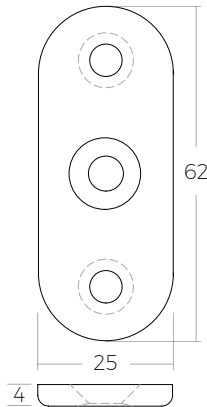All Attachment Plates are 316 Grade Stainless Steel.




Straight Flat

PART #	ØD	Finish
SSUA0010116S	Flat	S
SSUA0010116B	Flat	B
SSUA0010116GB	Flat	GB
SSUA0010116C	Flat	G




Straight Curved

PART #	ØD (Tube Dia)	Finish
SSUA0010616S	38.1 (1 1/2")	S
SSUA0010616B	38.1 (1 1/2")	B
SSUA0010616GB	38.1 (1 1/2")	GB
SSUA0010316S	42.4 (1.66")	S
SSUA0010316B	42.4 (1.66")	B
SSUA0010316GB	42.4 (1.66")	GB
SSUA0010716S	50.8 (2")	S



90° Flat

PART #	ØD (Tube Dia)	Finish
SSUA0012116S	Flat	S
SSUA0012116B	Flat	B
SSUA0012116GB	Flat	GB
SSUA0012116C	Flat	G



90° Curved

PART #	ØD (Tube Dia)	Finish
SSUA0012616S	38.1 (1 1/2")	S
SSUA0012316S	42.4 (1.66")	S
SSUA0012716S	50.8 (2")	S

Example of Creating Handrail Brackets for Posts

Choose Required Handrail Attachment Plate above.

Choose Required Tube Support (pg 125).



SSUA0010616S



SSTS2050016S



Fixed Rod



Single Pin Fixed Rod


PART #	ØD	Pin Thread	Hole Thread
SSFP0012116S	12	M8	M6
SSFP0022116S	14	M8	M6



Double Hole Fixed Rod


PART #	ØD	L (Length)	Hole Thread
SSFP0012216S	12	75	M6, M8
SSFP0022216S	14	75	M6, M8
SSFP0112216S	12	52	M6, M8

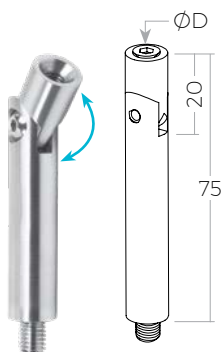Swivel Rod



Single Pin Swivel Rod

PART #	ØD	Pin Thread	Hole Thread
SSSP0012116S	12	M8	M6
SSSP0022116S	14	M8	M6



Double Hole Swivel Rod

PART #	ØD	Hole Thread
SSSP0012216S	12	M6, M8
SSSP0122016S	14	M6

Angled Rod




PART #	ØD	Hole Thread
SSFB0012216S	12	M6, M8
SSFB0022216S	14	M6, M8



PART #	ØD	Hole Thread
SSFB0032216S	12	M6, M8


Tube Supports for Round Tubes

ØD = Diameter of Tube Support Base and Tube Applied • WT = Wall Thickness of Tube Applied
38.1mm = 1½" • 42.4mm = 1.66" • 50.8mm = 2"




S
Satin
Stainless
Steel

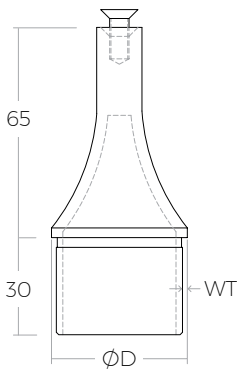316 Grade



Cone Fixed

PART #	ØD (Tube Diameter)	WT
SSTF2050016S	38.1	1.5
SSTF2030016S	42.4	2.0
SSTF2060016S	50.8	1.5

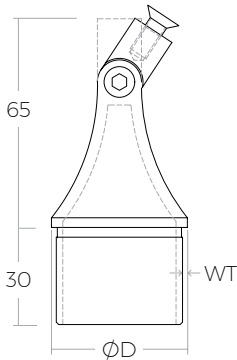

Cone Swivel


PART #	ØD (Tube Diameter)	WT
SSTS2050016S	38.1	1.5
SSTS2030016S	42.4	2.0
SSTS2060016S	50.8	1.5



PHOTO: Discount Aluminum Railings


Tube Supports for Square Tubes

D = Dimension of Tube Support and Tube Applied • WT = Wall Thickness of Tube Applied
38.1mm = 1½" • 42.4mm = 1.66" • 50.8mm = 2"




316 Grade

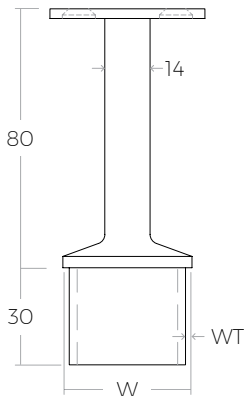Handrail Components




Chamfered Fixed

PART #	W (Tube Dimensions)	WT
SSZT0404016S	40 x 40	2.0

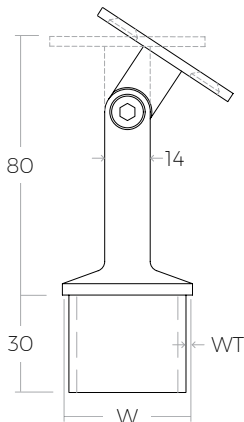


Chamfered Swivel

PART #	W (Tube Dimensions)	WT
SSZT1404016S	40 x 40	2.0

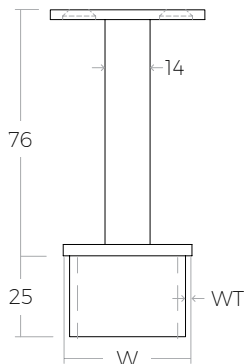

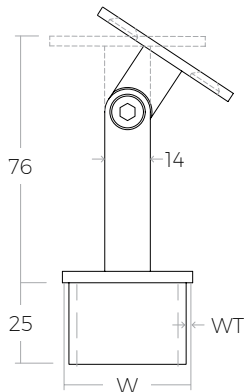
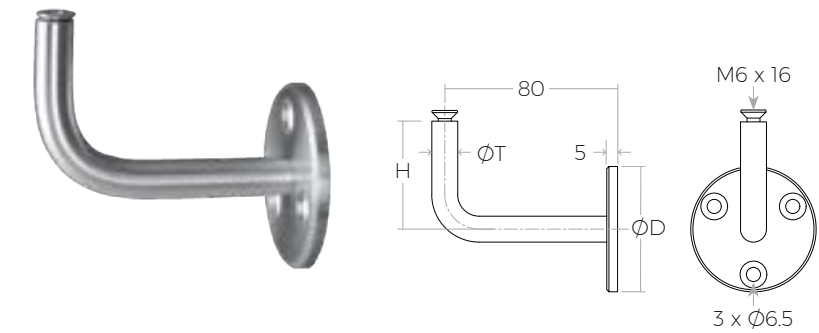
Flat Top Fixed

PART #	W (Tube Dimensions)	WT
SSZT24016S	40 x 40	2.0



Flat Top Swivel


PART #	W (Tube Dimensions)	WT
SSZT34016S	40 x 40	2.0
SSZT34016B 	40 x 40	2.0



Off-the-Wall

Fixed

PART #	H (Height)	ØD (Plate Dia)	ØT (Rod Dia)	Finish
SSWB0100016S	50	58	12	S
SSWB0100016B	50	58	12	B
SSWB0100016GB	50	58	12	GB
SSWB1301116S	75	58	12	S
SSWB2311116S	75	68	14	S

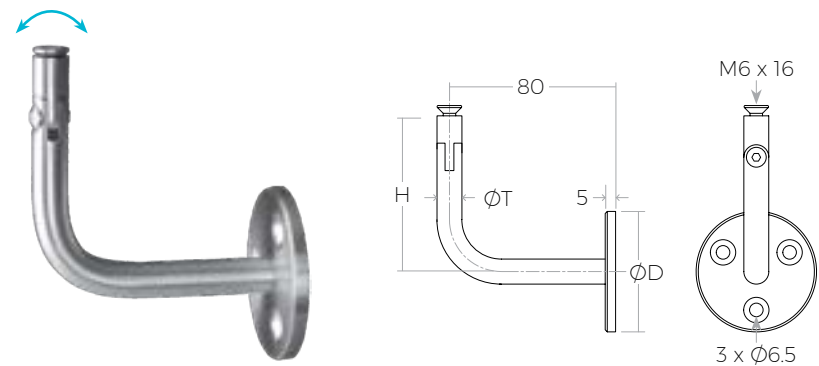

Swivel

PART #	H (Height)	ØD (Plate Dia)	ØT (Rod Dia)	Finish
SSWB1109016S	75	58	12	S

Example of Creating an Off-The-Glass Bracket

Choose Required
Handrail Attachment Plate.
(pg 123)



SSUA0010116S

Choose Required
Off-the-Glass Handrail Bracket.
(pg 128-131)



SSGF11GM16S

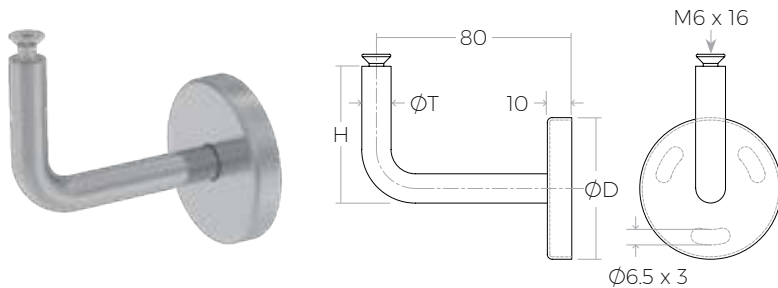


RD2 Series - Standard Concealed

S
Satin
Stainless
Steel

B
Powder
Coated
Satin Black


GB
PVD
Brushed
Graphite Black



Off-the-Wall

PART #	H (Height)	ØD (Plate Dia)	ØT (Rod Dia)	Finish
SSWB111216S	50	58	12	S
SSWB111216B	50	58	12	B
SSWB111216GB	50	58	12	GB
SSWB111416S	50	58	14	S
SSWB111416B	50	58	14	B
SSWB111416GB	50	58	14	GB
SSWB111426S	72	58	14	S

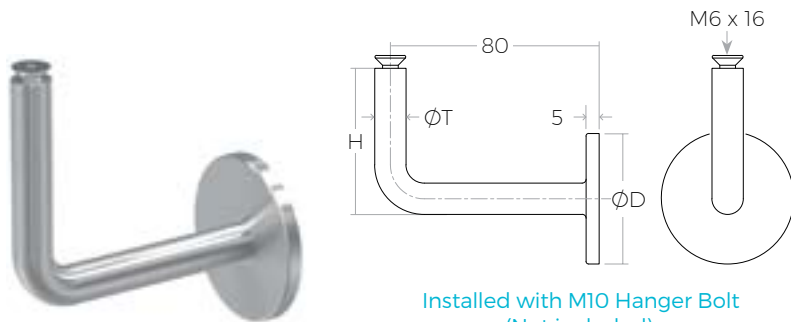
RD3 Series - Standard Welded



Installed with M10 Hanger Bolt
(Not included).

Off-the-Wall

PART #	H (Height)	ØD (Plate Dia)	ØT (Rod Dia)	Finish
SSWB3116S	50	38	12	S
SSWB3116B	50	38	12	B
SSWB3116GB	50	38	12	GB
The above match our 1 1/2" Standoffs.				
SSWB3216S	50	50	12	S
SSWB3216B	50	50	12	B
SSWB3216GB	50	50	12	GB
The above match our 2" Standoffs.				
SSWB3316S	75	50	14	S
The above match our 2" Standoffs.				

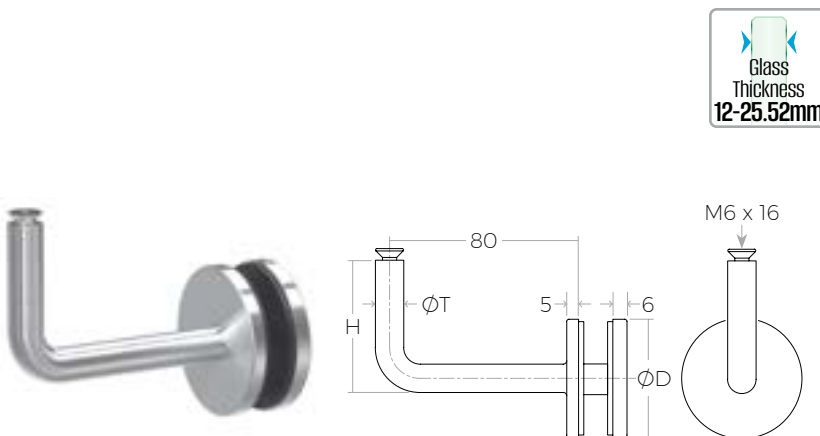


Off-the-Glass





PART #	H (Height)	ØD (Plate Dia)	ØT (Rod Dia)	Finish
SSGF11GM17S	50	38	12	S
SSGF11GM17B	50	38	12	B
The above match our 1 1/2" Standoffs.				
SSGF11GM18S	50	50	12	S
SSGF11GM18B	50	50	12	B
The above match our 2" Standoffs.				
SSGF11GM16S	50	58	12	S
SSGF11GM16B	50	58	12	B
SSGF11GM16GB	50	58	12	GB
SSGF10GX16S	50	50	14	S
The above match our 2" Standoffs.				
SSGF10GM16S	75	50	14	S
The above match our 2" Standoffs.				

Round Handrail Brackets

RD4 Series - Height Adjustable



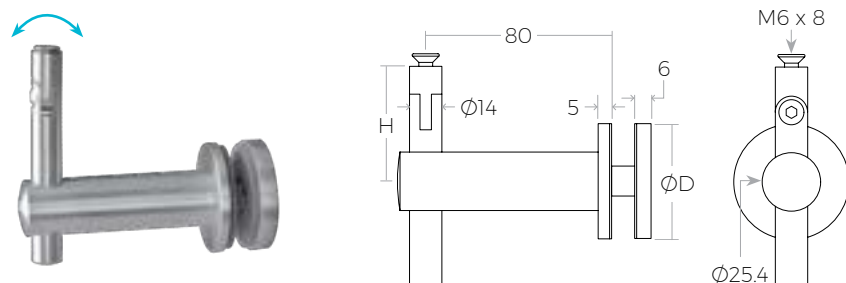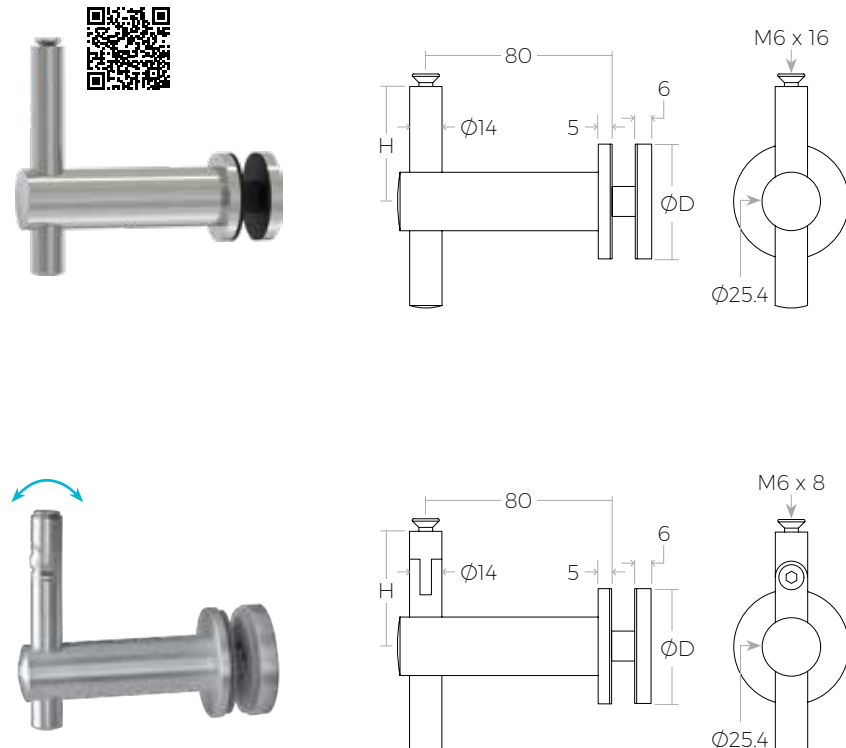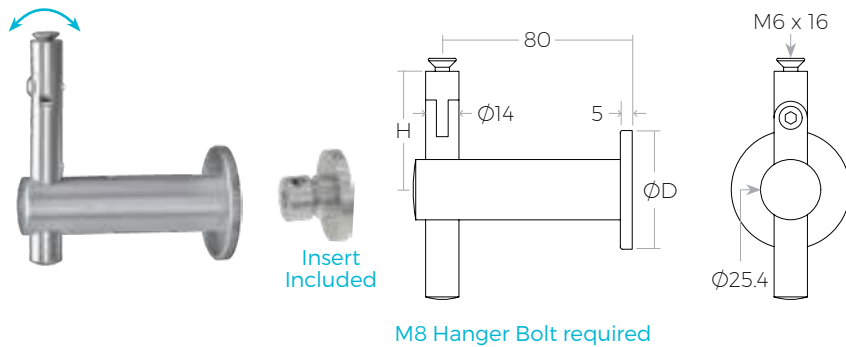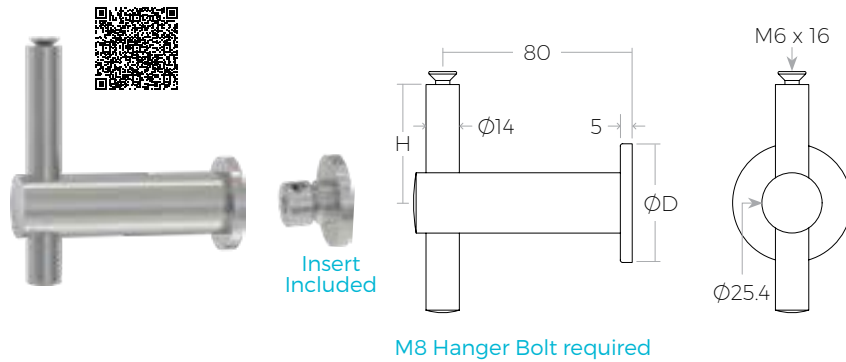All Handrail Brackets are 316 Grade Stainless Steel.



Off-the-Wall

Fixed

PART #	H (Height)	ØD (Plate Dia)	Finish
SSWF100X16S	20-76	38	S
SSWF100X16B	20-76	38	B
SSWF100X16GB	20-76	38	GB
SSWF100X16C	20-76	38	G
The above match our 1 1/2" Standoffs.			
SSWF0010016S	20-76	50	S
SSWF0010016B	20-76	50	B
SSWF0010016GB	20-76	50	GB
SSWF0010016C	20-76	50	G
The above match our 2" Standoffs.			

Swivel

PART #	H (Height)	ØD (Plate Dia)	Finish
SSWS0010016S	40-76	50	S

Off-the-Glass



Fixed

PART #	H (Height)	ØD (Plate Dia)	Finish
SSGF100X16S	20-76	38	S
SSGF100X16B	20-76	38	B
SSGF100X16GB	20-76	38	GB
SSGF100X16C	20-76	38	G
The above match our 1 1/2" Standoffs.			
SSGF0010016S	20-76	50	S
SSGF0010016B	20-76	50	B
SSGF0010016GB	20-76	50	GB
SSGF0010016C	20-76	50	G
The above match our 2" Standoffs.			



Swivel

PART #	H (Height)	ØD (Plate Dia)	Finish
SSGS0010016S	40-76	50	S

S
Satin
Stainless
Steel

B
Powder
Coated
Satin Black

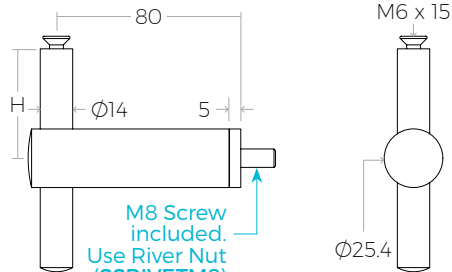GB
PVD
Brushed
Graphite Black




M8 Screw
included.
Use River Nut
(SSRIVETM8)
to install.
Pg 207

Off-the-Post Bracket with Flat Adapter

PART #	H (Height)	Finish
SSWF20016S	20-76	S
SSWF20016B	20-76	B



Use these Adapters to
apply above Bracket
to a Round Post.




Adapters for Round Posts

PART #	ØD (Post Dia)	Finish
SSWF20116S	42.4	S
SSWF20116B	42.4	B
SSWF20216S	50.8	S
SSWF20216B	50.8	B

RD5 Series - Heavy Duty



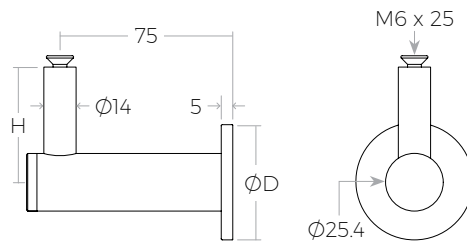Insert
Included




M8 Hanger Bolt required

Off-the-Wall

PART #	H (Height)	ØD (Plate Dia)	Finish
SSWF0020016S	50	50	S

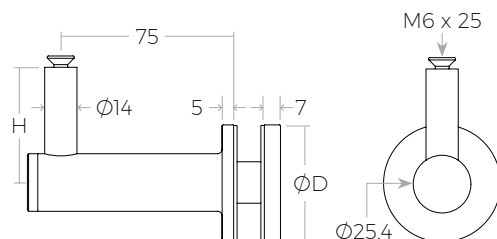Matches our 2" Standoffs.



Off-the-Glass



PART #	H (Height)	ØD (Plate Dia)	Finish
SSGF200X16S	50	38	S
SSGF0020016S	50	50	S

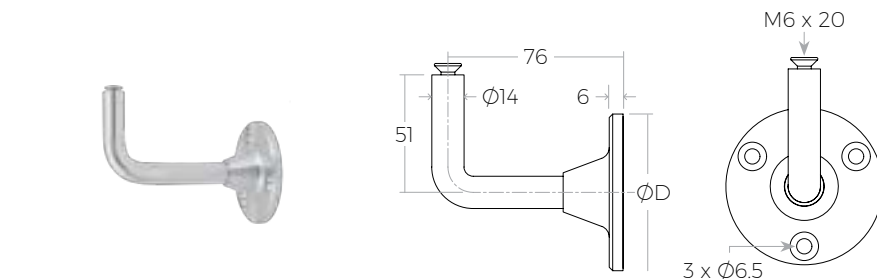
Matches our 2" Standoffs.
Matches our 1 1/2" Standoffs.

RD6 Series - Heavy Duty / Length Adjustable



S
Satin
Stainless
Steel


B
Powder
Coated
Satin Black



Off-the-Wall

Fixed


PART #	ØD (Plate Dia)	Finish
SSWB0100116S	68	S
SSWB0100116B	68	B

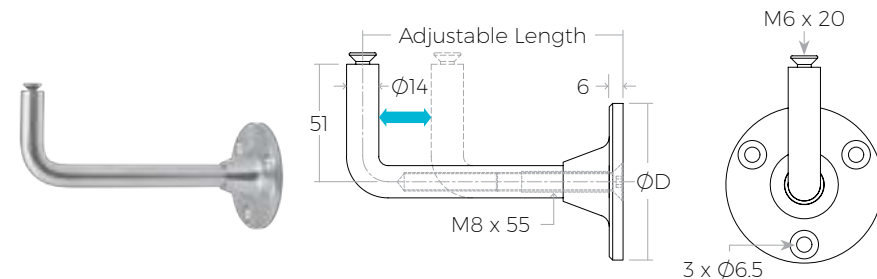

Adjustable Length

PART #	ØD (Plate Dia)	Adjustable Length	Finish
SSWB0100216S	68	76-114	S
SSWB0100216B	68	76-114	S
SSWB0100316S	68	114-152	S
SSWB0100316B	68	114-152	B

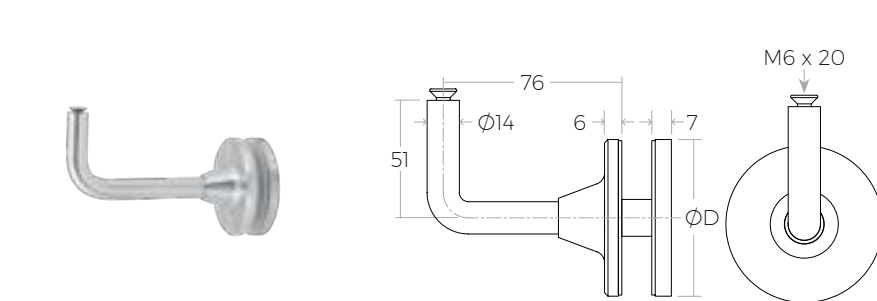Cut to desired length.
Collar design conceals cut Rod.




Off-the-Glass

Fixed



PART #	ØD (Plate Dia)	Finish
SSGF12GM16S	68	S
SSGF12GM16B	68	B

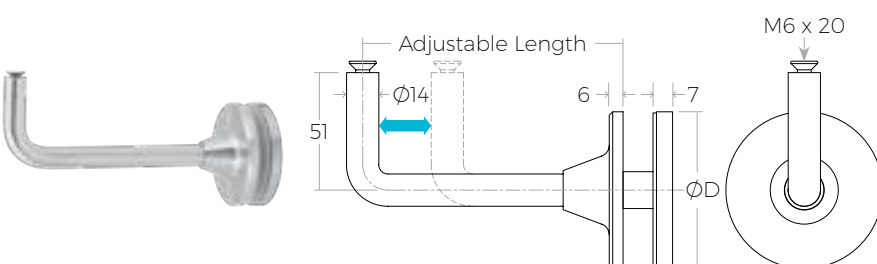

Adjustable Length

PART #	ØD (Plate Dia)	Adjustable Length	Finish
SSGF13GM16S	68	76- 114	S
SSGF13GM16B	68	76-114	B
SSGF14GM16S	68	114-152	S
SSGF14GM16B	68	114-152	B

Cut to desired length.
Collar design conceals cut Rod.



2" Adjustable Length Bracket Base

PART #	ØD (Plate Dia)	Adjustable Length	Finish
SSGF15GM16S	50	N/A	S
SSGF15GM16B	50	N/A	B


Use with Off-the-Wall Handrail brackets above
to match the look of our 2" Standoffs. Includes
base, cap and gaskets.



PHOTO: Millan Glass & Mirror

Square Handrail Brackets

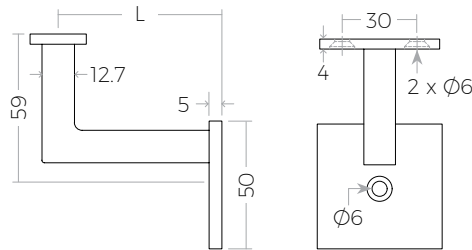
SQ1 Series - Standard



Off-the-Wall

Single Hole


PART #	L (Length)	Finish
SSZH0070116S	64	S
SSZH0072116S	90	S
SSZH007216GB	90	GB

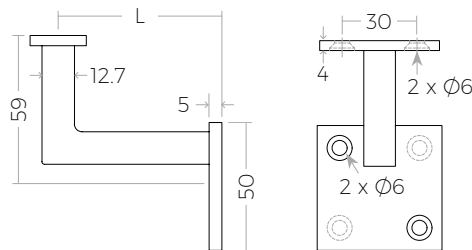

Double Hole

PART #	L (Length)	Finish	Top Hole on Plate
SSZH0070100S	64	S	Left
SSZH0070101S	64	S	Right
SSZH0071116S	90	S	Left
SSZH0071115S	90	S	Right

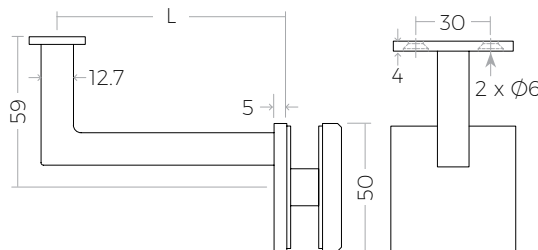Showing left configuration.




Off-the-Glass




PART #	L (Length)	Finish
SSZH1071116S	90	S
SSZH107111GB	90	GB

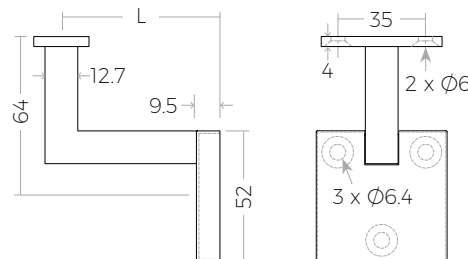SQ2 Series - Standard Concealed



Off-the-Wall

PART #	L (Length)	Finish
SSZH21216S	64	S
SSZH31216S	90	S
SSZH31216B	90	B
SSZH31216GB	90	GB

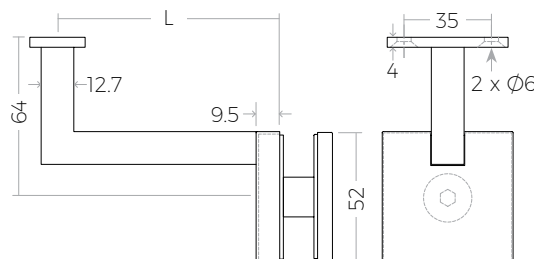


Off-the-Glass




PART #	L (Length)	Finish
SSZH31226S	90	S
SSZH31226B	90	B
SSZH31226GB	90	GB



SQ4 Series - Height Adjustable



Insert
Included.

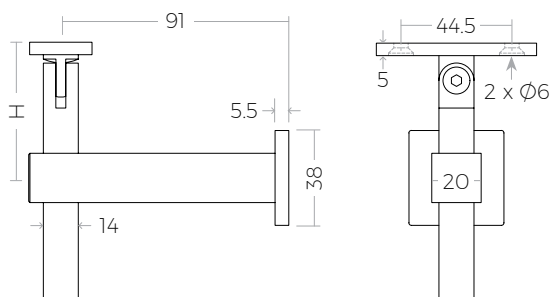


Installed with M8 Hanger Bolt
(Not included).

Off-the-Wall Swivel

PART #	H (Height)	Finish
SSZH40116S	30-70	S

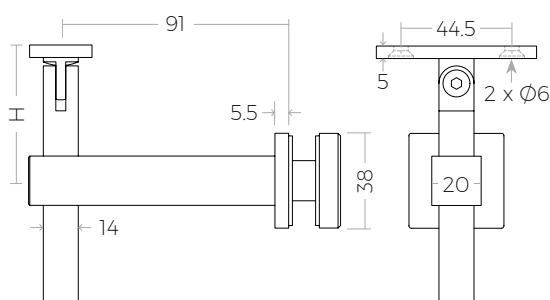Matches our 1 1/2" Square Standoffs.



Off-the-Glass Swivel


PART #	H (Height)	Finish
SSZH40216S	30-70	S

Matches our 1 1/2" Square Standoffs.

SQ5 Series - Heavy Duty



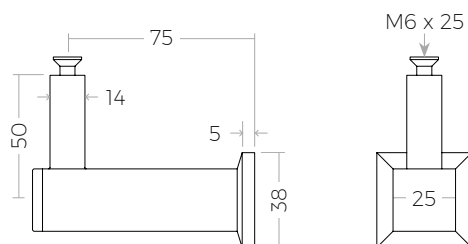
Insert
Included.



Installed with M8 Hanger Bolt
(Not included).

Off-the-Wall Fixed

PART #	Finish
SSZH0073116S	S

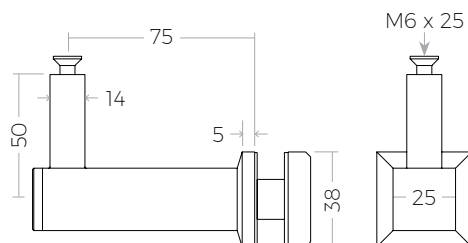


Off-the-Glass Fixed

PART #	Finish
SSZH0073216S	S


Rod Railing Components

PHOTO: Accurate Stairs & Railings




Adjustable Rod Connector

PART #
SSHADJUST




Round Rod Holder

PART #	ØD Tube Diameter	Rod Diameter
SSHD0010404S	Flat	12.7
SSHD0060404S	38.1	12.7
SSHD0030404S	42.4	12.7




Round Rod Holder for Glass

PART #	Glass Size
SSHDGLASS	6-12



Solid Ball Cap Ends for Round Rods

PART #
SSHDEND12



Square Rod Holder

PART #	Rod Size
SSHDSQR04S	12.7

Horizontal Tubing



PHOTO: ProRail Systems Ltd.

Available in
8ft & 19ft
lengths.

Round Tube



PART #	OD	Length
SST583048	5/8"	96"

Square Tube



PART #	OD	Length
SSTSQ123048	1/2" x 1/2"	96"



Our Tubular Horizontal Series are available in Round and Square in 96" lengths. These Tubes can be cut to your desired length and are available in Stainless Steel.

To see our full line of Balusters, please pick up a copy of our **STYLES** catalogue or scan the code to view online.





- Attractive, affordable, and very low-maintenance.
- Invisible appearance will not impair views.
- Made from strong and weather-tough type 316 Stainless Steel Cable.
- Can be used on new or existing Metal or Wood Railing frames.
- Simple, fast, do-it-yourself installation using prefabricated assemblies.
- Special easy-to-use Fittings are hidden in the End Posts.
- Made from over 70% recycled materials.
- Versatile uses: Railings, Trellises, Fences, Interior, Exterior, Residential, Commercial.

Cable Assembly Care & Maintenance

The protective chromium oxide film on the surface of Stainless Steel gives it superior corrosion resistance. Properly maintained Stainless Steel provides excellent luster, strength, and durability. In most applications, Stainless Steel will not rust or stain even after many years of service, but it is NOT rust or stain proof. When Stainless comes in contact with chloride salts, sulfides, or other rusting metals, it can discolour or even rust and corrode. However, with proper care and maintenance, Stainless Steel can remain beautiful and functional for years.

- Clean Stainless with soap and warm water. Never clean with mineral acids or bleaches.
- Never use coarse abrasives like sandpaper or Steel wool on Stainless. Use synthetic Scotch pads instead.
- Never leave Stainless in contact with iron, Steel, or other metals. This can cause rust spots or corrosion.
- Always remove stains or rust spots as soon as possible with either soap and water or a Brass, Silver, Stainless, or chrome cleaner.
- It is important to periodically inspect Cable assemblies for proper tension and re-tension as needed.

10 year warranty

Feeney Inc. warrants that all CableRail® Stainless Steel Cable and Connectors shall be free from defects in material and workmanship under normal use, conditions, installation, and maintenance in accordance with product specifications for ten years from date of purchase. The complete text of this warranty is available upon request.



DETERMINE WHAT YOU'LL NEED BEFORE YOU START

Carefully Review:

Read all of the product descriptions, installation instructions, and frame recommendation pages in this catalogue. Contact us should you have any inquiries.

Section Frames:

Divide your Railing frame into sections by determining which corner and end Posts will be the Cable termination Posts. Remember that straight runs should not exceed 50' and runs with bends (2 corner bends at most) should not exceed 40'.

Determine Lengths:

Measure the outside lengths of each of your sections from step 2 and select the Cable assembly lengths that will fit each section. Be sure that the assemblies are at least 1' longer than the length of the section.

Calculate Quantities:

The number of assemblies depends on your Railing design. Remember that each horizontal Cable is a separate assembly and that the Cables should not be spaced further than 3" apart. Calculate the quantities needed for each of your assembly lengths.

Check Accessories & Tools:

Count up all the end Caps, protector sleeves, beveled washers, cutters, lacing needles, drills, saws, and abrasive discs you may need (see Tools Checklist on the Installation Instruction pages).

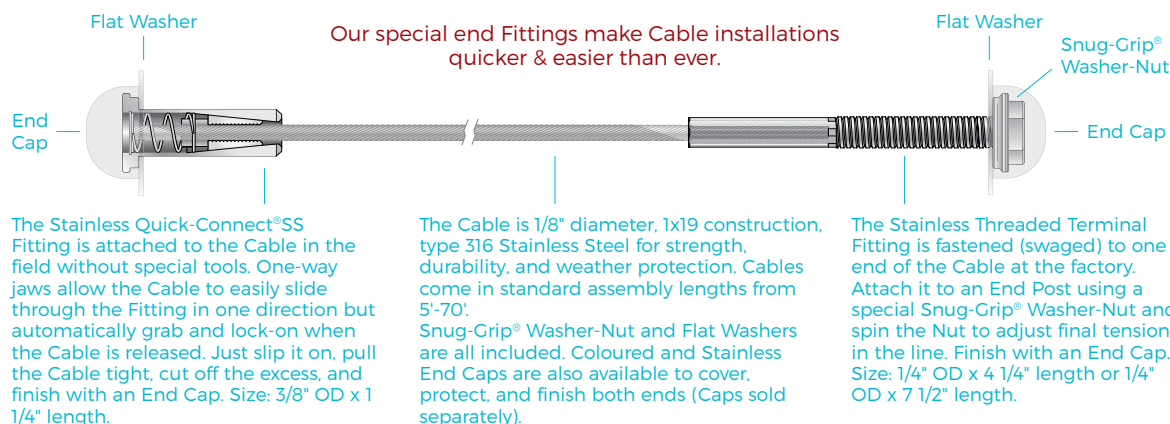
Fill Your Order:

Visit our office locations to take a look at our CableRail® display and order in person or online via our Website:

euroeac.com

Easy to Install

PREFABRICATED CABLE ASSEMBLIES are an attractive, budget-friendly, and low-maintenance alternative to commonly-used Metal and Wood Picket infill. Assemblies use 1/8" diameter high-strength, weather-tough type 316 Stainless Steel Cable and come in a wide range of standard lengths that can be quickly trimmed to size in the field. Each assembly includes special, easy-to-use Threaded Terminal and Quick-Connect®SS End Fittings that remain concealed in your End Posts. The result: an extremely durable, virtually invisible Railing infill that leaves the view open and unimpaired.



Cable Assemblies

Everything you need for your basic Cable project is listed in this section. Choose your assembly lengths, a preferred style of End Cap, accessory items, and you're good to go. Each assembly includes the selected length of 1/8" diameter type 316 Stainless Steel Cable with a Threaded Terminal Fitting pre-attached to one end, one Stainless Steel Quick-Connect®SS Fitting, two Flat Washers, and one Stainless Steel Snug-Grip® Washer-Nut. (3/16" and 1/4" Cable and Fittings available upon request).

Assembly Lengths	Metal* Assembly #	Wood** Assembly #	*Includes 4 1/4" Threaded Terminals and Nylon Washers. **Includes 7 1/2" Threaded Terminals and Stainless Steel Washers.
5'	SSCBKIT4145	SSCBKIT7125	
10'	SSCBKIT41410	SSCBKIT71210	
15'	SSCBKIT41415	SSCBKIT71215	
20'	SSCBKIT41420	SSCBKIT71220	
25'	SSCBKIT41425	SSCBKIT71225	
30'	SSCBKIT41430	SSCBKIT71230	
40'	SSCBKIT41440	SSCBKIT71240	
50'	SSCBKIT41450	SSCBKIT71250	
70'	SSCBKIT41470		

End Caps (Sold Separately)

Select a preferred End Cap style to cover, protect, and finish each end.



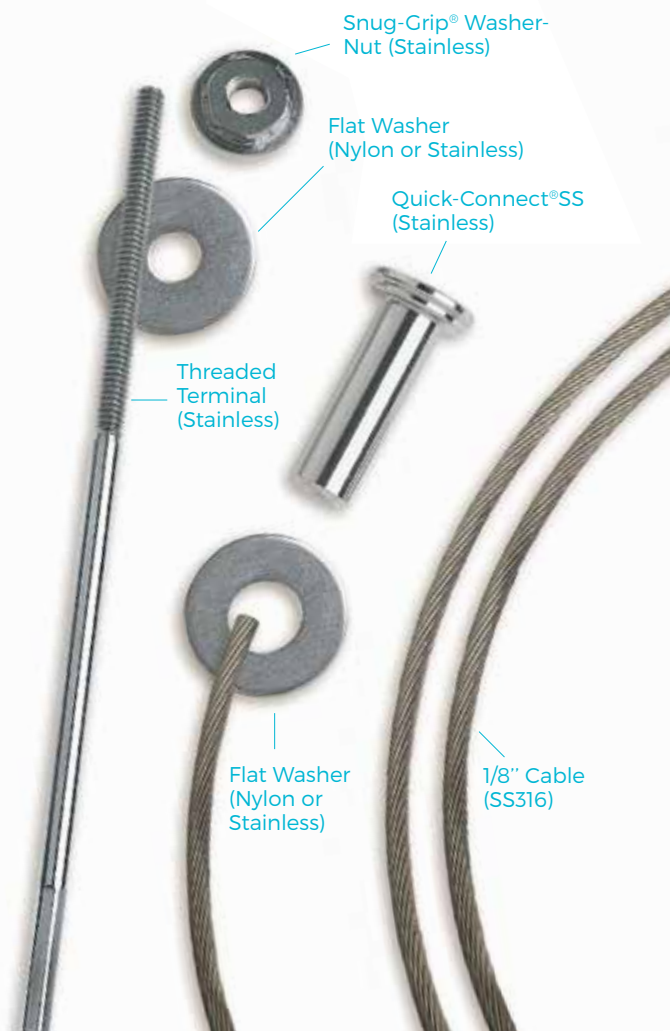
Coloured Polyethylene (Sold 10 per package)

SSCBECBL Black 3/4" OD x 3/8" H



Stainless (Sold 4 per package)

SSCBECSSDO Dome 3/4" OD x 3/8" H
SSCBECSSCH Chamfer 3/4" OD x 3/8" H



Cable Accessories

All accessories complement our 1/8" diameter Cable Assembly Kits.



Metal Post Nylon Protector Sleeves (Sold individually)

For protecting corner and Stairway transition Posts from Cable abrasion. For Landing only.

- 1 **SSCBIB14516** 1/8" (Threaded Terminal ends).
- 2 **SSCBIB31614** 1/8" (Intermediate Posts).
- 3 **SSCBIB381532** 1/8" (Quick-Connect®SS ends).



Wood Post Stainless Steel Protector Sleeves (Sold 10 per package)

For protecting corner and Stairway transition Posts from Cable abrasion. For Landing only.

SSCBSL1478 1/4" OD x 7/8" long (Fits 1/4" diameter drill holes).



Stainless Beveled Washers (Sold 4 per package)

For providing a flat bearing surface when attaching Fittings at 32° angled Stair terminations.

- SSCBBW3834** 3/4" OD x 3/8" ID (Quick-Connect®SS ends).
- SSCBBW93234** 3/4" OD x 9/32" ID (Threaded Terminal ends).



Rubber Grommets (Sold individually)

Rubber Grommet for Intermediate Posts.

SSCBRG18



Cable Cutters (Sold 1 per package)

For shearing excess Cable.

SSCBWCUT18 8" long, coated handles, hardened jaws.



Tension Gauge (Sold 1 per package)

Easy-to-use tool for checking Cable tension.

SSCBTG Designed for 1/8" CableRail® Cable.



Tensioning Tool (Sold 1 per package)

Designed for 1/8" CableRail Cable.

SSCBTT



Cable Lacing Needle (Sold 1 per package)

For quickly lacing Cable Ends through Posts without snagging.

SSCBNE18 4 1/2" long, reusable.



Quick-Connect® Release Tool (Sold 1 per package)

For temporarily releasing the jaws of the Quick-Connect®SS Fitting to remove or adjust the position.

SSCBRT18 1/2" OD x 1 1/8" long, reusable.

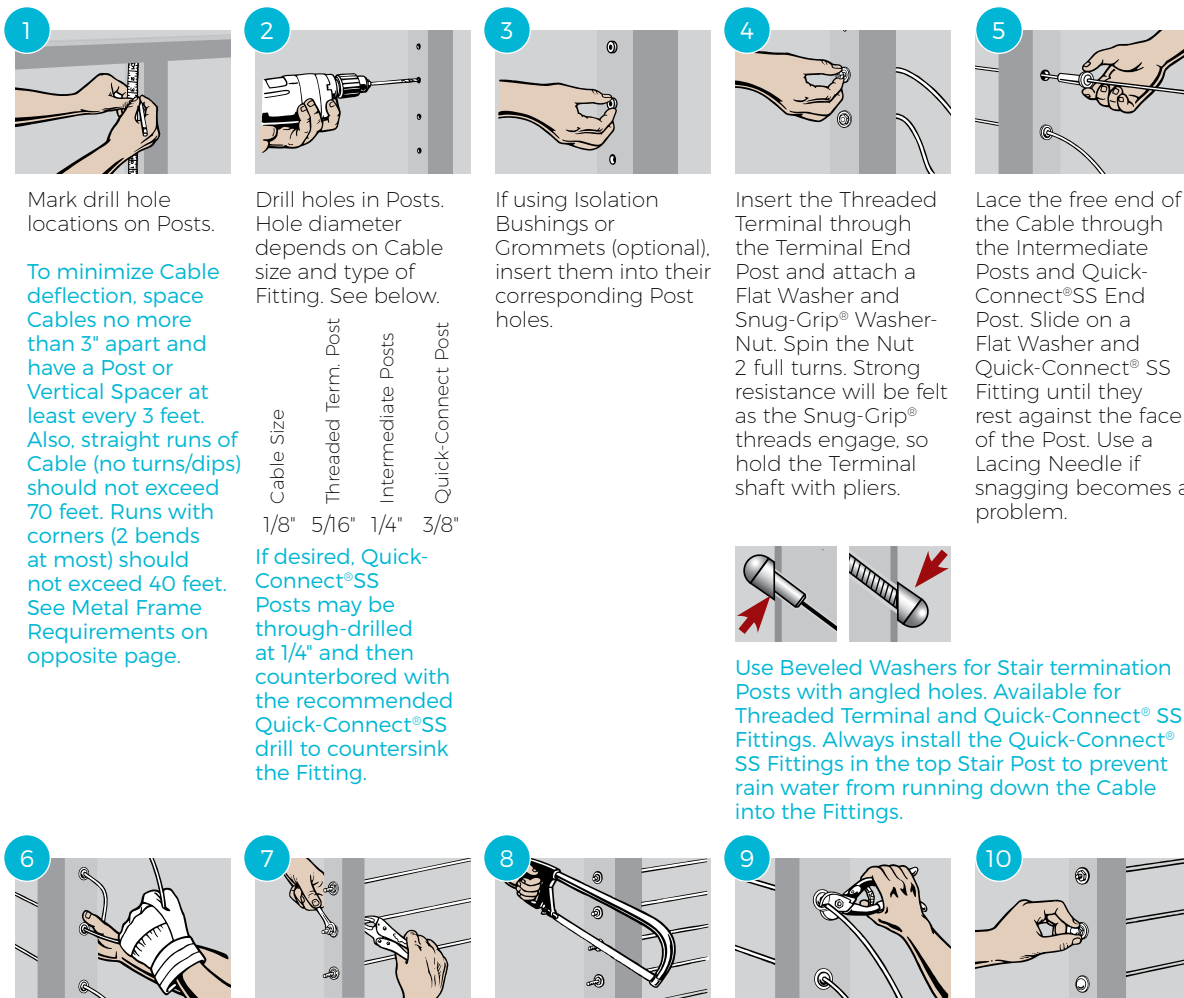
Step-by-Step Installation for Metal Frames

Installing the Standard 1/8" Cable System is easy. Just follow these simple steps:

TOOLS CHECKLIST

- ☐ Safety Glasses
- ☐ Work Gloves
- ☐ Pencil
- ☐ Measuring Tape
- ☐ Electric Drill
- ☐ Drill Bits
- ☐ Hammer
- ☐ Cable Cutters
- ☐ Vise-Grip Pliers
- ☐ 7/16" Wrench
- ☐ Electric Grinder with Grinding Disc & Cut-Off Disc
- ☐ Hacksaw or Electric Reciprocating Saw
- ☐ Cable Lacing Needle
- ☐ Feeney Tension Gauge

IMPORTANT NOTE: If using electric or pneumatic tools to tighten the Washer-Nuts, spin the nuts very slowly; otherwise, they will heat up, causing the threads to seize.



Mark drill hole locations on Posts.

To minimize Cable deflection, space Cables no more than 3" apart and have a Post or Vertical Spacer at least every 3 feet. Also, straight runs of Cable (no turns/dips) should not exceed 70 feet. Runs with corners (2 bends at most) should not exceed 40 feet. See Metal Frame Requirements on opposite page.

Drill holes in Posts. Hole diameter depends on Cable size and type of Fitting. See below.


Cable Size	Threaded Term. Post	Intermediate Posts	Quick-Connect Post
1/8"	5/16"	1/4"	3/8"

If desired, Quick-Connect®SS Posts may be through-drilled at 1/4" and then counterbored with the recommended Quick-Connect®SS drill to countersink the Fitting.


If using Isolation Bushings or Grommets (optional), insert them into their corresponding Post holes.

Insert the Threaded Terminal through the Terminal End Post and attach a Flat Washer and Snug-Grip® Washer-Nut. Spin the Nut 2 full turns. Strong resistance will be felt as the Snug-Grip® threads engage, so hold the Terminal shaft with pliers.


Lace the free end of the Cable through the Intermediate Posts and Quick-Connect®SS End Post. Slide on a Flat Washer and Quick-Connect®SS Fitting until they rest against the face of the Post. Use a Lacing Needle if snagging becomes a problem.



Use Beveled Washers for Stair termination Posts with angled holes. Available for Threaded Terminal and Quick-Connect®SS Fittings. Always install the Quick-Connect®SS Fittings in the top Stair Post to prevent rain water from running down the Cable into the Fittings.




Hold the Quick-Connect®SS Fitting with one hand and pull the Cable tight with the other. The Fitting automatically locks when you release the Cable.




Tension the Cables by holding the Threaded Terminal shaft with Vise-Grip Pliers and spinning the Snug-Grip® Washer-Nuts with a Wrench. A Feeney Tension Gauge may be used to check uniform tension.


See tensioning sequence diagram at bottom left.



Use Hacksaw, Reciprocating Saw, or Electric Grinder with Cut-Off Disc to saw off the excess threads as close to the Snug-Grip® Washer-Nut as possible. Touch up with Electric Grinder. The special Snug-Grip® threads prevent the Nut from loosening.




Use Cable Cutters or Electric Grinder with Cut-off Disc to trim the excess Cable. Grind flush the exposed Cable ends with an Electric Grinder.



Snap on End Caps over the exposed Quick-Connect®SS Fittings and the Snug-Grip® Washer-Nuts. You're done.


SSCLEANER can be applied for lasting protection of Stainless Steel Cable and parts.



Recommended Cable tensioning sequence

*Offset drill holes at least 1/2" if you choose to have Cables terminating at a Single Pipe Post.

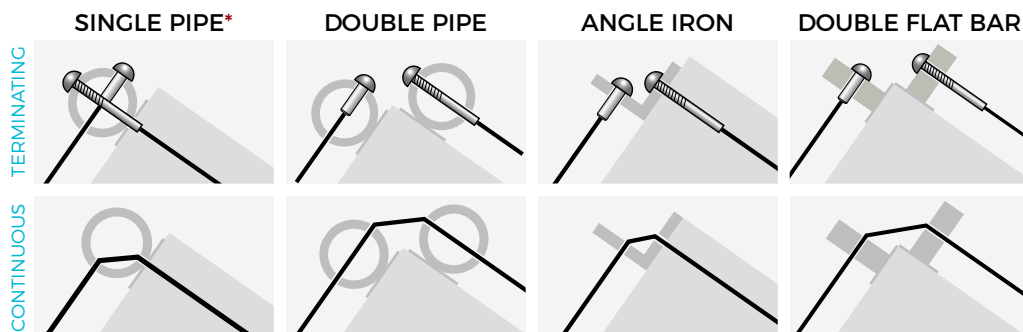Cables can either terminate or run through Corner Posts.




Metal Frame Requirements

Frames need to Support the tension of properly installed Cables.


They need to be designed and built strong enough for the end and Corner Posts to Support a load in excess of 300 lbs. for each Cable. Here are some basic guidelines to help you prepare your Railing frames for Cable infill.

Minimum sizes for all Corner and End Posts.


All other Posts should be sized as required for Cap Rail Support strength or for code.




FLAT BAR
2" Wide, 1" Thick



ANGLE IRON
2" Wide, 1/2" Thick




EXTRA STRONG PIPE
1 1/2" ID, 1 7/8" OD



SQUARE TUBE
2" Wide, 1/4" Thick

The Basic Frame Design

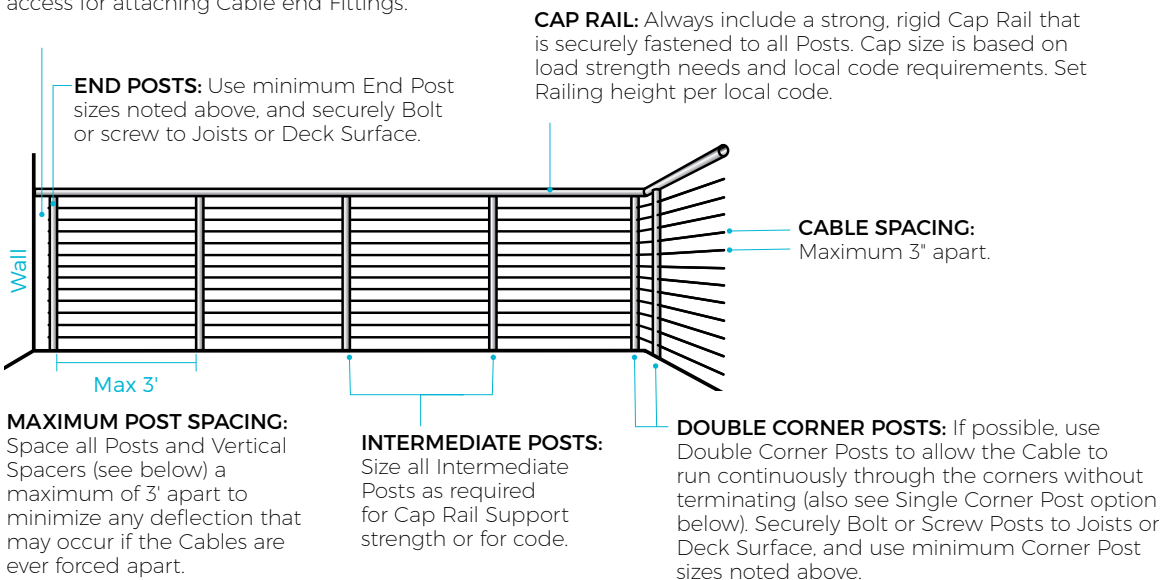
SPACING FROM WALLS: Set End Posts 3-4" away from the house/Wall face to allow access for attaching Cable end Fittings.



And Some Other Options

Vertical Spacers (Optional):

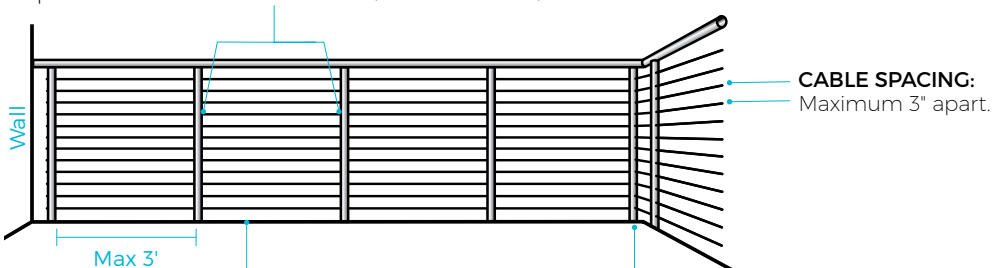Slender Spacers may be used instead of some of the larger Intermediate Posts to achieve a more open Railing design. These are non-structural members and are only intended to maintain Cable spacing and minimize deflection. Examples are 1" Metal Tubing or 1/4" Flat Bar. Attach Spacers to the Cap Rail and either the Foot Rail, Deck Surface, or Joists.



FOOT RAILS (Optional):

Foot Rails should be spaced no more than 4" above the deck surface, or as required by local code, and should be sized as needed for Support strength and design appearance.

SINGLE CORNER POST (Optional):

In most cases with Single Corner Posts, Cables must be terminated. Exceptions are Angle Iron Posts or Tubular Metal Posts. When terminating on a Single Corner Post, be sure to offset the drill holes at least 1/2" to allow internal clearance for the Cable Fittings. Use minimum End Post sizes noted above and securely Bolt or Screw to Joists or Deck Surface.

IMPORTANT

For Railings, we recommend spacing the Cables no more than 3" apart and placing Posts or vertical members no more than 3' apart.

Please note that since building codes vary by province and city, our recommendations may not comply with code requirements in all areas.

Always consult with your local building department before starting your project.

CONSTRUCTION CHECKLIST


- ☐ Space Cables maximum 3" apart.
- ☐ Space Posts/verticals maximum 3' apart.
- ☐ Observe minimum end/corner Post sizes shown above.
- ☐ Securely fasten all Posts and Cap Rails.
- ☐ Carefully plan all termination and corner Posts for proper clearance, positioning, and maximum Cable run lengths.
- ☐ Straight runs of Cable (no turns/dips) should not exceed 70'; runs with corner bends (2 bends at most) should not exceed 40'.

Step-by-Step Installation for Wood Frames


Installing the Standard 1/8" Cable System is easy. Just follow these simple steps:

TOOLS CHECKLIST


- ☐ Safety Glasses
- ☐ Work Gloves
- ☐ Pencil
- ☐ Measuring Tape
- ☐ Electric Drill
- ☐ 1/4", 5/16" & 3/8" Drill Bits
- ☐ Hammer
- ☐ Cable Cutters or Cut-Off Disc
- ☐ Vise-Grip Pliers
- ☐ 7/16" Wrench
- ☐ Electric Grinder & Disc
- ☐ Hacksaw
- ☐ Cable Lacing Needle
- ☐ Feeney Tension Gauge

- 


Mark drill hole locations on Posts.


To minimize Cable deflection, space Cables no more than 3" apart and have a Post or Vertical Spacer at least every 3 feet. See Wood Frame Requirements on opposite page.
- 


Drill 5/16" holes in one End Post for the Threaded Terminal Fitting, 3/8" holes in the other End Post for the Quick-Connect® Fitting, and 1/4" holes in all other Posts.


If desired, the Quick-Connect® Posts may be through-drilled with a 1/4" bit and then counterbored to 1 1/2" deep with a 3/8" bit to countersink the Fitting.
- 

Insert Protector Sleeves at necessary locations. Tap in until flush.


See Special Parts section below.
- 


Insert the Threaded Terminal through the Terminal End Post and attach a Flat Washer and Snug-Grip® Washer-Nut. Spin the Nut 2 full turns. Strong resistance will be felt as the Snug-Grip® threads engage, so hold the Terminal shaft with pliers.
- 


Lace the free end of the Cable through the Intermediate Posts and Quick-Connect® End Post. Slide on a Flat Washer and Quick-Connect® Fitting until they rest against the face of the Post. Use a Lacing Needle if snagging becomes a problem.
- 

Hold the Quick-Connect® SS Fitting with one hand and pull the Cable tight with the other. The Fitting automatically locks when you release the Cable.
- 

Tension the Cables by holding the Threaded Terminal shaft with Vise-Grip Pliers and spinning the Snug-Grip® Washer-Nuts with a Wrench. A Feeney Tension Gauge may be used to check uniform tension.

See tensioning sequence diagram at bottom left.
- 

Use Hacksaw, Reciprocating Saw, or Electric Grinder with Cut-off Disc to saw off the excess threads as close to the Snug-Grip® Washer-Nut as possible. Touch up with Electric Grinder. The special Snug-Grip® threads prevent the Nut from loosening.
- 

Use Cable cutters or Electric Grinder with Cut-off Disc to trim the excess Cable. Grind flush the exposed Cable ends with an Electric Grinder.
- 



Snap on End Caps over the exposed Quick-Connect® SS Fittings and the Snug-Grip® Washer-Nuts. You're done.

SSCLEANER can be applied for lasting protection of Stainless Steel Cable and parts.


Use Beveled Washers for Stair termination Posts with angled holes. Available for Threaded Terminal and Quick-Connect® SS Fittings. Always install the Quick-Connect® SS Fittings in the top Stair Post to prevent rain water from running down the Cable into the Fittings.

Special parts for special situations


Recommended Cable tensioning sequence.



Use Beveled Washers for Stair termination Posts with angled holes. Available for both Threaded Terminal & Quick-Connect® Fittings. Always install the Quick-Connect® Fitting in top Stair Post to prevent rain water from running down the Cable into the Fitting.




Protector Sleeves prevent abrasion at angled transitions on Wood Posts (e.g., Stair transition Posts or outside faces of Double Corner Posts). Fits 1/4" diameter drill holes.




Cables can either terminate or run through Corner Posts.

TERMINATING


CONTINUOUS



SINGLE WOOD POST
Offset drill holes at least 1/2".



DOUBLE WOOD POST



DOUBLE WOOD POST

Wood Frame Requirements


Frames need to Support the tension of properly installed Cables.

They need to be designed and built strong enough for the End and Corner Posts to Support a load in excess of 300 lbs. for each Cable. Here are some basic guidelines to help you prepare your Railing frames for Cable infill.

Minimum Post Sizes

END AND CORNER POSTS: The End and Corner Posts are the Cable termination/transition Posts and Support the full load of the Taut Cables; therefore, the minimum recommended size for these critical Posts is standard 4 x 6 Wood.


INTERMEDIATE POSTS: The remaining Intermediate Posts do not Support any tension load since the Cables pass straight through, so they can be sized as required for Cap Rail Support or for code.



4 x 6 WOOD
3 1/2" Wide, 5 1/2" Thick


The Basic Frame Design

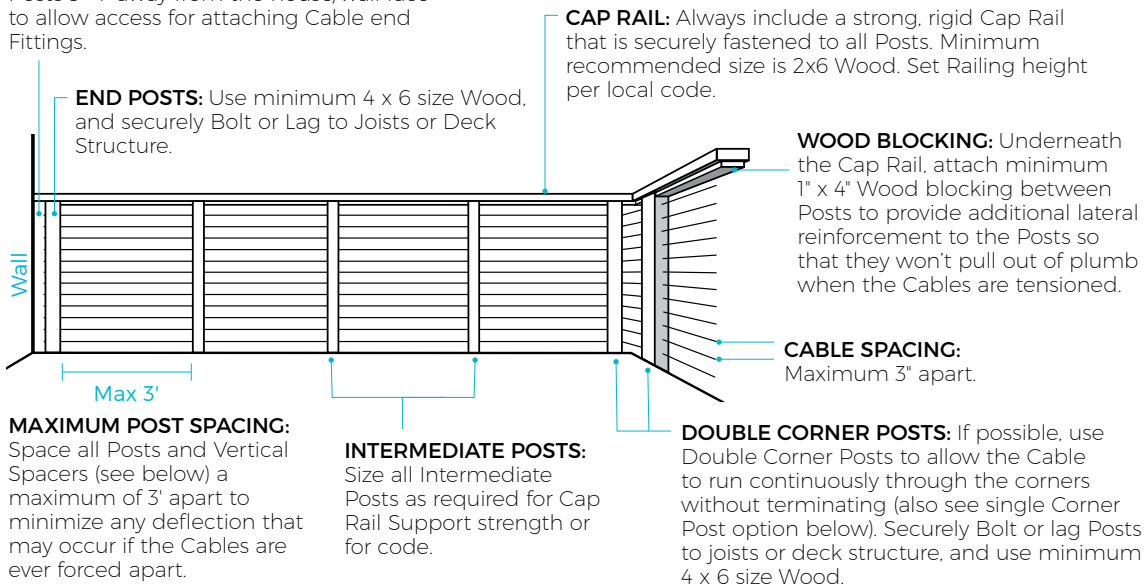SPACING FROM WALLS: Always set End Posts 3"-4" away from the house/wall face to allow access for attaching Cable end Fittings.



And Some Other Options

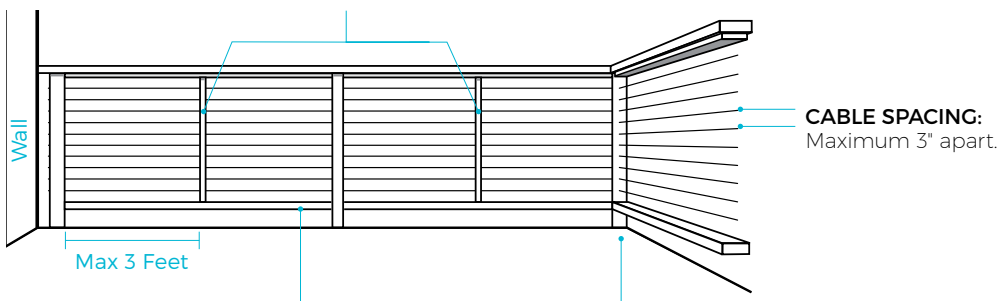VERTICAL SPACERS (Optional): Slender Spacers may be used instead of some of the larger Intermediate Posts to achieve a more open Railing design. These are non-structural members and are only intended to maintain Cable spacing and minimize deflection. Typical examples are 2" x 2" Wood Strips, Copper Tubing. Attach them to the Cap Rail and either the Foot Rail, Deck Surface, or Joists.



FOOT RAILS (Optional): Recommend minimum 2 x 4 size Wood spaced no more than 4" (or as per code) above the deck surface.

SINGLE CORNER POST (Optional): Cables must be terminated at the corners if Single Posts are used. Use minimum 4 x 6 size Wood and securely Bolt or lag to joists or deck structure. Be sure to offset the Cable drill holes by at least 1/2" to allow internal clearance for the Cable Fittings.

IMPORTANT

For Railings, we recommend spacing the Cables no more than 3" apart and placing Posts or vertical members no more than 3' apart.

Please note that since building codes vary by province and city, our recommendations may not comply with code requirements in all areas.

Always consult with your local building department before starting your project.

CONSTRUCTION CHECKLIST

- ☐ Space Cables maximum 3" apart.
- ☐ Space Posts/verticals maximum 3' apart.
- ☐ Use minimum 4 x 6 size Wood for all end and corner Posts
- ☐ Securely fasten all Posts and Cap Rails.
- ☐ Carefully plan all termination and corner Posts for proper clearance, positioning, and maximum Cable run lengths.
- ☐ Straight runs of Cable (no turns/dips) should not exceed 70'; runs with corner bends (2 bends at most) should not exceed 40'.

Installation Videos

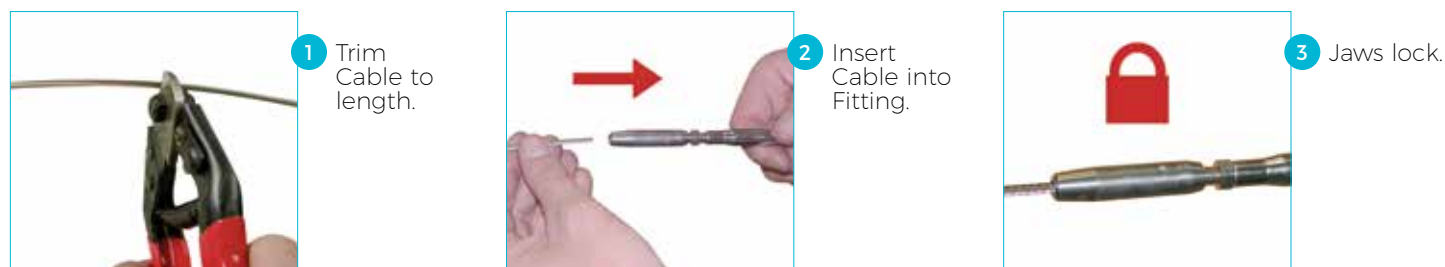


Quick-Connect® Cable hardware




We've taken our automatic-locking-jaw design from our original Quick-Connect® Fitting and applied it to an entire line of Cable End Fittings. Now, you can select from a wide variety of sleek and versatile Cable End Fittings that offer the flexibility of assembling Cables in the field and the simplicity, speed, and gripping power of our Quick-Connect® Jaws: no more cumbersome crimp tools or time-consuming wedge-type compression Fittings. Simply trim your Cable to length, push the end into the Quick-Connect® Fitting, and the Spring-Loaded Jaws automatically engage. You're ready to go! Made from Marine Grade 316 Stainless Steel for weather-tough durability, low maintenance, and lasting beauty. Fittings also come with a silicone protection seal pre-inserted into the end, providing added protection against dirt and debris entering the body of the Fitting. If necessary, a reusable release tool is available to disengage and remove or re-adjust the Fitting (see **SSCBRT18** pg 142).

So Easy




2 Types of Quick-Connect® Fittings

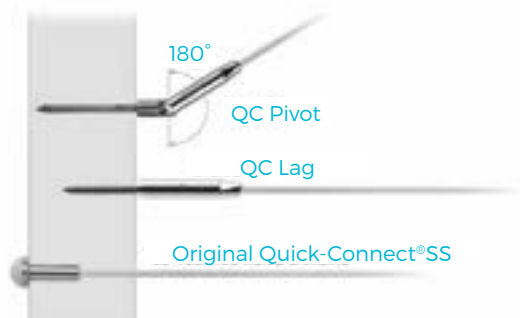

Fixed End Fittings

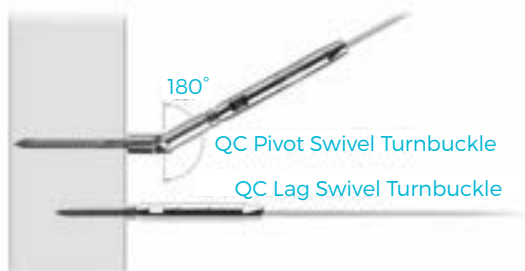- Non-Adjustable end termination Fittings, sometimes referred to as "dead ends."
- Have no tensioning Capabilities.
- Each Fixed End Fitting must be paired with at least one Tension Adjustment Fitting.



Swivel Tension Adjustment Fittings

- Include Turnbuckles and Swivel Fittings that are used to tighten the Cable lines.
- Tension is adjusted by spinning the tubular body on the Turnbuckles and Swivel Fittings.
- Tension Adjustment Fittings can be paired with either a Fixed End Fitting or another Tension Adjustment Fitting.




Quick-Connect® Fittings • 316 Grade Stainless Steel

Fixed End Fittings

Quick-Connect® LAG

- Screws into the face of a Wood Post or Wall using a Hanger Bolt with lag thread (included).
- Typically paired with a Quick-Connect® Lag Swivel Turnbuckle.




Part #	CableØ	Thread	T	L	QCØ	Pilot DrillØ
SSCBQCLAG	1/8"	1/4" lag	2"	4 1/4"	7/16"	*7/64"

*Drill pilot hole slightly larger if using hardwood Posts.

Quick-Connect® Pivot

- Screws into the face of a Wood Post or Wall using a Hanger Bolt with lag thread (included).
- 180° pivoting allows for angled Stair terminations.
- Typically paired with a Quick-Connect® Pivot Swivel Turnbuckle.




Part #	CableØ	Thread	T	L	QCØ	Pilot DrillØ
SSCBQCP18	1/8"	1/4" lag	2"	4 3/8"	7/16"	*7/64"

*Drill pilot hole slightly larger if using hardwood Posts.

Tension Adjustment Fittings

Quick-Connect® LAG Swivel Turnbuckle

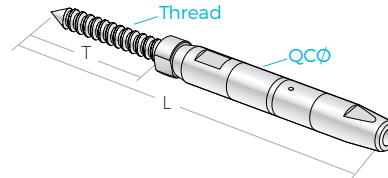- Screws into the face of a Wood Post or Wall using a Hanger Bolt with lag thread (included).
- Typically paired with a Quick-Connect® Lag or another Quick-Connect® Lag Swivel Turnbuckle.



Installation Video




Part #	CableØ	Thread	T	L Closed (Open)	QCØ	Pilot DrillØ
SSCBQCLAG1	1/8"	1/4" lag	2"	5 1/4" (5 3/4")	7/16"	*7/64"

*Drill pilot hole slightly larger if using hardwood Posts.

Quick-Connect® Pivot Swivel Turnbuckle

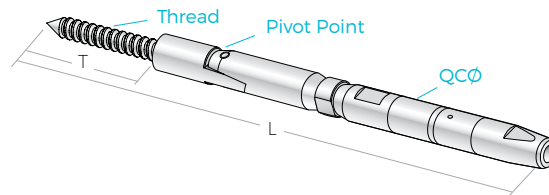- Screws into the face of a Wood Post or Wall using a Hanger Bolt with lag thread (included).
- 180° pivoting allows for angled Stair terminations.
- Typically paired with a Quick-Connect® Pivot or another Quick-Connect® Pivot Swivel Turnbuckle.




Installation Videos

Part #	CableØ	Thread	T	L Closed (Open)	QCØ	Pilot DrillØ
SSCBQCPST18	1/8"	1/4" lag	2"	7" (7 3/4")	7/16"	*7/64"

*Drill pilot hole slightly larger if using hardwood Posts.

The Original! Quick-Connect® SS

- Fits into a hole drilled in End Post, and the lip rests against the outside Post face.
- Design allows the Cable to pass entirely through the Fitting in one direction only; any excess Cable is trimmed.
- Use Beveled Washers **SSCBBW3834** or **SSCBBW93234** (pg 142) for angled Stair termination and Flat Washers for added bearing surface on Wood Posts.
- Exposed end is covered with Coloured End Caps **SSCBECBL** or Stainless End Caps **SSCBECSSDO**, **SSCBECSSCH** (pg 141).
- Can be paired with any Tension Adjustment Fitting.



Part #	CableØ	CØ	BØ	L	DrillØ
SSCBQC18	1/8"	5/8"	3/8"	1 1/8"	3/8"

CableRail® Coils (1x19 Construction)



Part #	CableØ	L	Grade
SSCB18100	1/8"	100'	SS316
SSCB18250	1/8"	250'	SS316

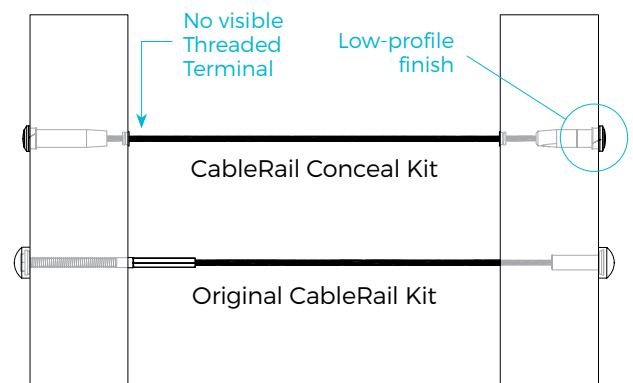
The swivel line of turnbuckles have a special swiveling body that's integrated with the Quick-Connect® Fitting, creating a shorter overall turnbuckle design with a sleek appearance and fewer exposed threads. Machined flats allow wrenches to securely grip and spin the body to adjust tension without marring the polished surface. Swivel turnbuckles are perfect for short to medium-length Cable runs.




CableRail® Conceal Kit

Cablerail® Gets Even Sleeker!


Introducing the new CableRail® Conceal Kit. This easy to install Cable railing system provides an alternative solution to our Original CableRail® Kits for customers looking for the look and feel of a lower profile of the End Posts.



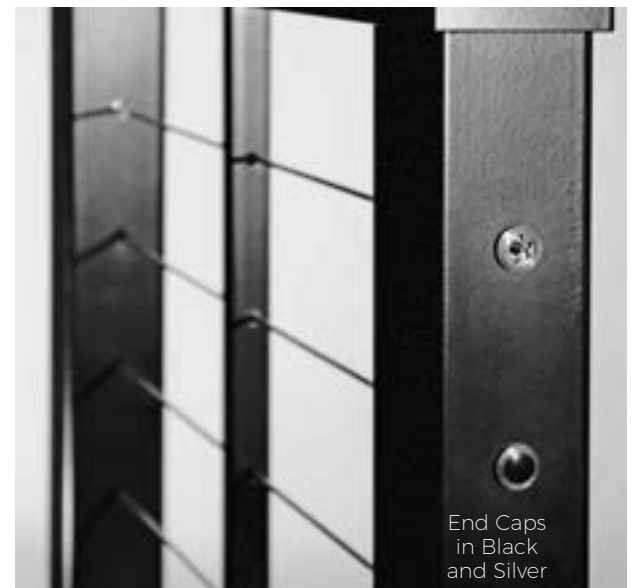- A beautiful low profile alternative to our Original CableRail® kits.
- Creates a similar look on both ends of the assembly with no visible Threaded Terminal end.
- Uses a specially designed tension Fitting on one end and a QuickConnect® Fitting on other end for easy installation.
- Sold as assemblies in 5' increments from 5'-30'.
- Available for 1/8" diameter Cable only.



CableRail® Conceal Kit

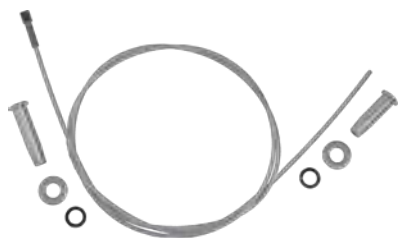

PART #	Length
SSCBCONKIT5	5'
SSCBCONKIT10	10'
SSCBCONKIT15	15'
SSCBCONKIT20	20'
SSCBCONKIT25	25'
SSCBCONKIT30	30'

Tools & Accessories

Sold Separately



Conceal Tool Kit

SSCBCONCRKIT

- 1** T-handle Wrench.
- 2** 9/16" Ratcheting Box Wrench.
- 3** Star Driver Tool (**SSCBCONSTAR**).
In Kit or sold separately.
Required for installation.



CableRail Conceal Cap Removal Tool

SSCBCONCRT




CableRail Conceal End Cap


PART #	Finish
SSCBCONECBL	Black
SSCBCONECSS	Silver

Cablerail Conceal Application for Wood

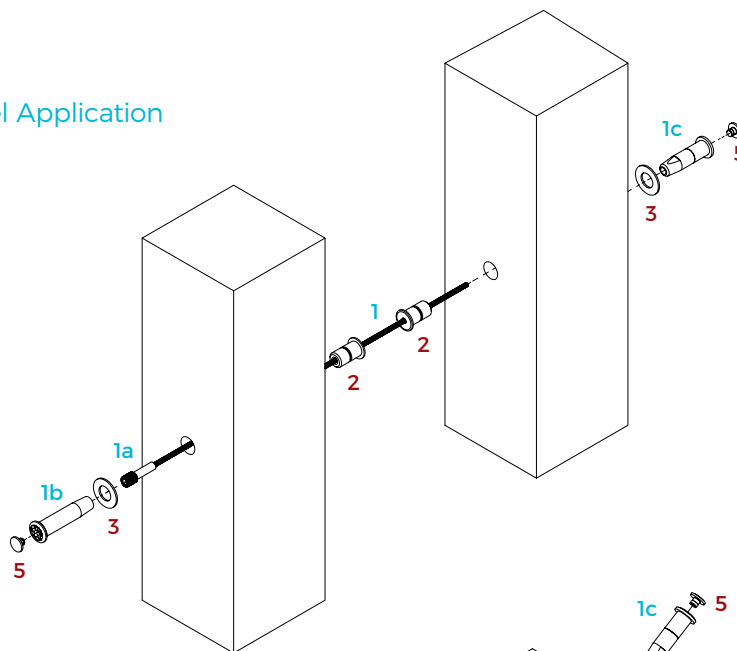Level Application



Stair Application

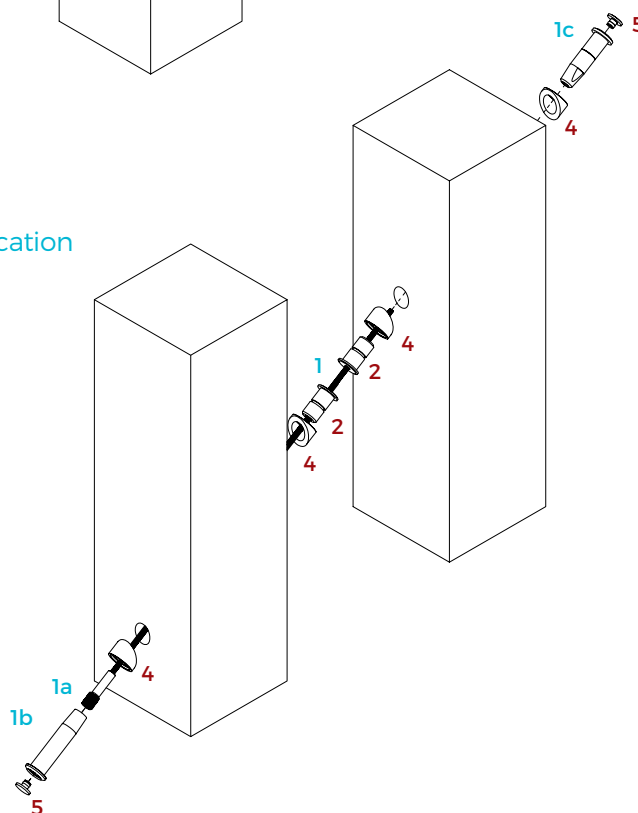

1 CableRail Conceal Kit:

- 1a** 1/8" diameter Cable with swaged CR Conceal Terminal.
- 1b** CR Conceal Receiver.
- 1c** CR Conceal Quick-Connect®.

Accessories (Sold Separately)

- 2 SSCBCONBIW** Bushing for Wood.
- 3 SSCBCONFWL** Flat Washer for Level application.
- 4 SSCBCONBWS** Bevelled Washer for Stair application.
- 5 SSCBCONECSS** CableRail® Conceal Cap.





DesignRail® Kits

by feeney®

Modular Aluminum Railing Kits

Create beautiful Railings inside and out with DesignRail® Kits. Installation is fast and easy with our modular kits and CableRail® Stainless Steel infill.

Design Your Own Railing

These **SPECIAL ORDER** Rail and Post Kits feature 6000 series Aluminum and AAMA-2604 Powder Coated finishes for long lasting beauty and durability, and are available for 36" and 42" high Railings. Your Railing system will require specific quantities and types of kits and parts depending on the configuration of your project.



CableRail®

Design Your Own Railing

Rail Kits

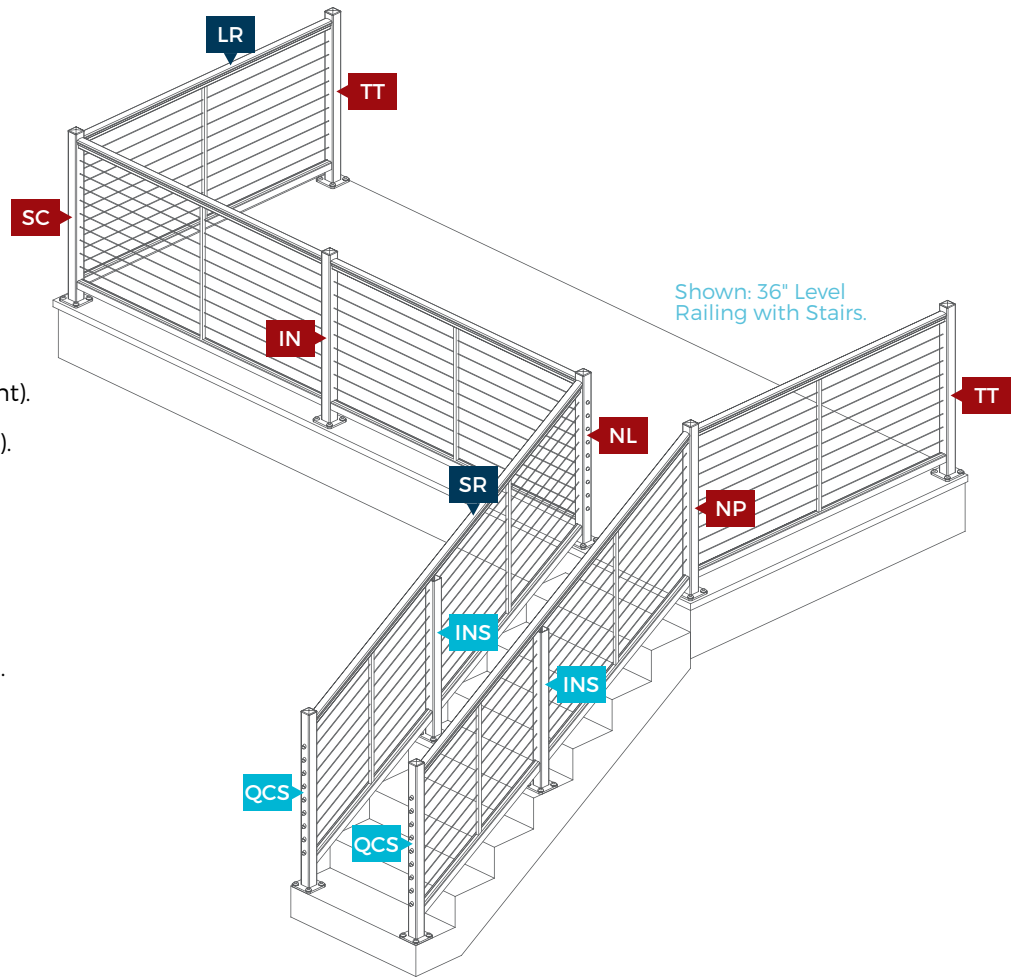
- LR** Level Rail Kit.
- SR** Stair Rail Kit.

Level Post Kits


- IN** Intermediate Post Kit.
- TT** Threaded Terminal Post Kit.
- QC** Quick-Connect® Post Kit.
- SC** Single Corner Post Kit.
- NR** Newel Termination Post Kit (Right).
- NL** Newel Termination Post Kit (Left).
- NP** Newel Passthrough Post Kit.

Stair Post Kits


- INS** Intermediate Stair Post Kit.
- TTS** Threaded Terminal Stair Post Kit.
- QCS** Quick-Connect® Stair Post Kit.



Transitioning to Stairs with a Newel Passthrough Post.




36" RAILINGS



42" RAILINGS

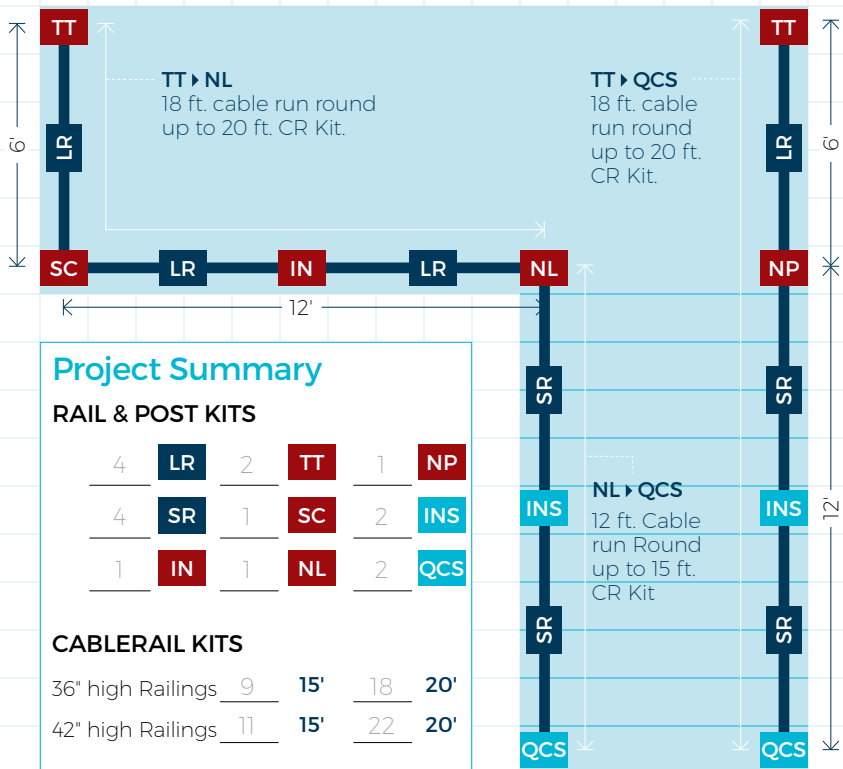Terminate the top two Cable Runs because of the change in height.



Project Summary

RAIL & POST KITS

4	LR	2	TT	1	NP
4	SR	1	SC	2	INS
1	IN	1	NL	2	QCS

CABLERAIL KITS

36" high Railings	9	15'	18	20'
42" high Railings	11	15'	22	20'

Installation Tips

- Position Posts 3 to 3 3/4" away from a Wall for easier installation of Cables.
- Max. 6' between major Posts (Quick-Connect®, Threaded Terminal, Intermediate, and Newel Posts).
- Use an Intermediate Picket (included in the Rail Kit) at least every 3' to reduce Cable deflection.
- Use End Caps (sold separately) for a finished look.
- Use Beveled Washers (sold separately) on the Cable End Fittings to create a flat bearing surface on Stairs.
- Use Rail Cut Kits (sold separately) if you are dividing the Rail Kits to create multiple shorter length Rails.
- Use Isolation Bushings (sold separately) in each Post when installing in a harsh environment, such as near salt water.

Design Your Project

STEP 1: Sketch your layout.

STEP 2: Select your height 42" 36".

STEP 3: Select your Rail & Post Kits.

_____	LR	_____	NP
_____	SR	_____	NL
_____	IN	_____	NP
_____	TT	_____	INS
_____	QC	_____	TTS
_____	SC	_____	QCS

STEP 4: Select your CableRail Kits.

Use 9 CableRail Kits per run for 36" systems and 11 for 42" systems.

_____	5'	_____	25'
_____	10'	_____	30'
_____	15'	_____	40'
_____	20'	_____	50'

Post Kits

MB

PVD

Matte

Black

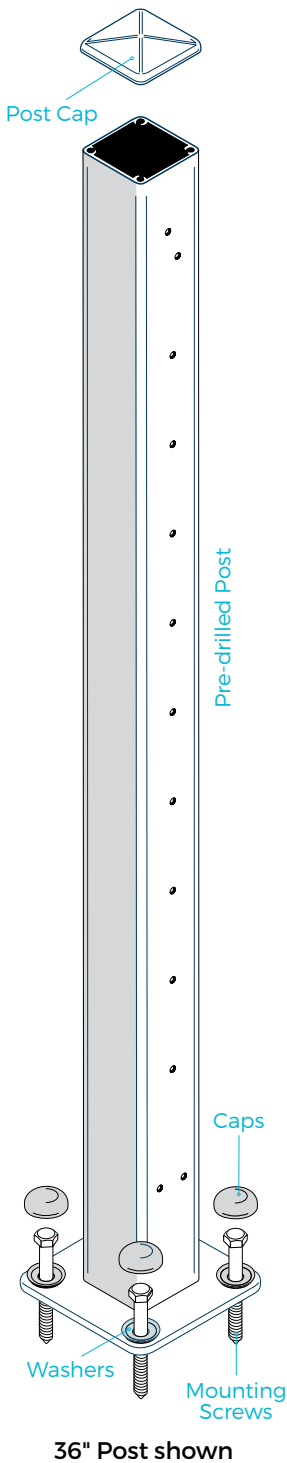
TB

Powder


Coated

Texture Black

Each Post Kit includes a Post with a pre-attached Base Plate, a Post Cap, and Mounting Screws with Caps. All Posts come pre-drilled for the Cable Fittings or for Cables to pass through, and can accommodate Isolation Bushings when required. Stair Posts are pre-drilled at an angle to accommodate a Stair slope of between 29 and 34 degrees. Level Post Kits are available for Railings in two heights: 36" with 9 Cable holes, or 42" with 11 Cable holes. Stair Post Kits are available for 36" Stair Railings. Isolation Bushings are recommend for installations in harsher climates, such as areas near salt water.




Level Posts



Quick-Connect® End Post Kit

Pre-drilled for CableRail® Quick-Connect® End Fittings.


PART #	Height
SSDRKQC36	36"
SSDRKQC42	42"



Intermediate Post Kit

Pre-drilled for Cable to pass through.


PART #	Height
SSDRKIN36	36"
SSDRKIN42	42"



Threaded Terminal End Post Kit

Pre-drilled for CableRail® Threaded Terminal End Fittings.

PART #	Height
SSDRKTT36	36"
SSDRKTT42	42"



Single Corner Post Kit

Specially designed for use at corners. Pre-drilled for CableRail® to run continuously through the Post.

PART #	Height
SSDRKSC36	36"
SSDRKSC42	42"

Level to Stair Posts



Newel Termination Post Kit Right

Designed for Level to Stair Railing transitions that have a right 90 degree turn from the Stairs. Use Quick-Connect® Fitting in level holes and Threaded Terminal Fitting in angled holes.


PART #	Height
SSDRKNR36	36"
SSDRKNR42	42"



Newel Termination Post Kit Left

Designed for level to Stair Railing transitions that have a left 90 degree turn turn from the Stairs. Use Quick-Connect® Fitting in level holes and Threaded Terminal Fitting in angled holes.

PART #	Height
SSDRKNL36	36"
SSDRKNL42	42"




Newel Passthrough Post Kit

Designed for Level to Stair Railing transitions where Cables continue through.

PART #	Height
SSDRKNP36	36"
SSDRKNP42	42"


Stair Posts



Threaded Terminal Stair End Post Kit

Pre-drilled for CableRail® Threaded Terminal End Fittings.


PART #	Height
SSDRKTTS36	36"



Intermediate Stair Post Kit

Pre-drilled for Cable to pass through. Includes a Post Adapter for connecting two Stair Rail Kits.

PART #	Height
SSDRKINS36	36"




Quick-Connect® Stair End Post Kit

Pre-drilled for CableRail® Quick-Connect® End Fittings.

PART #	Height
SSDRKQCS36	36"

Rail Kits

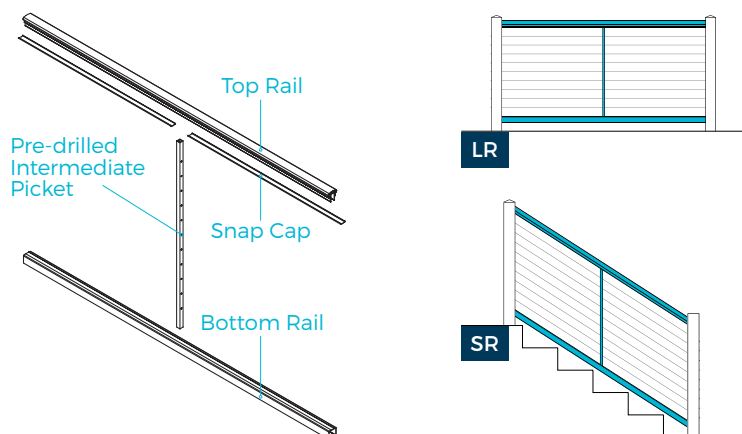Rail Kits contain the Rails that run between the Posts. Each kit includes a 6 ft. Top and Bottom Rail, a pre-drilled Intermediate Picket, and all necessary attachment hardware. Top and Bottom Rails can be trimmed to exact length and Stair slope in the field. Use Rail Cut Kits if cutting a single Rail Kit for use in multiple smaller sections. Rail Kits can be used with DesignRail® Post Kits or between your own Wood Posts.



Level Rail Kit

PART #	Height	Attachment Hardware
SSDRKLR36	36"	
SSDRKLR42	42"	

Stair Rail Kit

PART #	Height	Attachment Hardware
SSDRKSR36	36"	



Base Plate Covers

These easy to install 2 piece Covers conceal the Lag Screw heads and Post Base Plates to give the Railing a beautiful finishing touch. Great for retrofitting existing DesignRail® installations too.

PART #	Finish
SSDRAPCB	PVD Matte Black
SSDRAPCTB	Powder Coated Texture Black



Isolation Pad

High density Neoprene Pads that protect Posts and Base Plates from chemical corrosion that may be caused by contact with concrete or pressure treated Wood surfaces.

PART #	Finish
SSDRAIPAD	NA



Touch-Up Paint

Color matched to help cover small abrasions

PART #	Finish
SSDRAPAINTB	PVD Matte Black



Rail Cut Kits

Use Rail Cut Kits when cutting a Single Rail Kit into multiple parts for smaller Railing sections, reducing costs and wasted material.

PART #	Finish
SSDRARCLVL	PVD Matte Black
SSDRARCSTR	PVD Matte Black



Isolation Bushings

Use Isolation Bushings in pre-drilled CableRail® holes when installing a Railing in areas with harsher environments.

PART #	Description	Usage
SSDRAIBINT	22/pk	For Intermediate Posts.
SSDRAIBTT	22/pk	For Threaded Terminal Posts.
SSDRAIBQC	22/pk	For Quick Connect Posts.
SSDRAIBTTS + SSDRAIBQC		For Newel Termination Posts (left and right).
SSDRAIBTTS	18/pk	For Threaded Terminal Stair Posts.
SSDRAIBQCS	18/pk	For Quick Connect Stair Posts.
SSDRAIBSCIS	22/pk	For Single Corner, Intermediate Stair, & Newel Passthrough Posts.



Balusters



Coloured Stainless Steel Collection

The latest in contemporary
Balusters and accessories.

Add a splash of colour to your staircase
with our Stainless Steel coloured line.
Available in Square or Round.

To see our full line of Balusters, please pick
up a copy of our STYLES Catalogue or scan
the code below to view online.



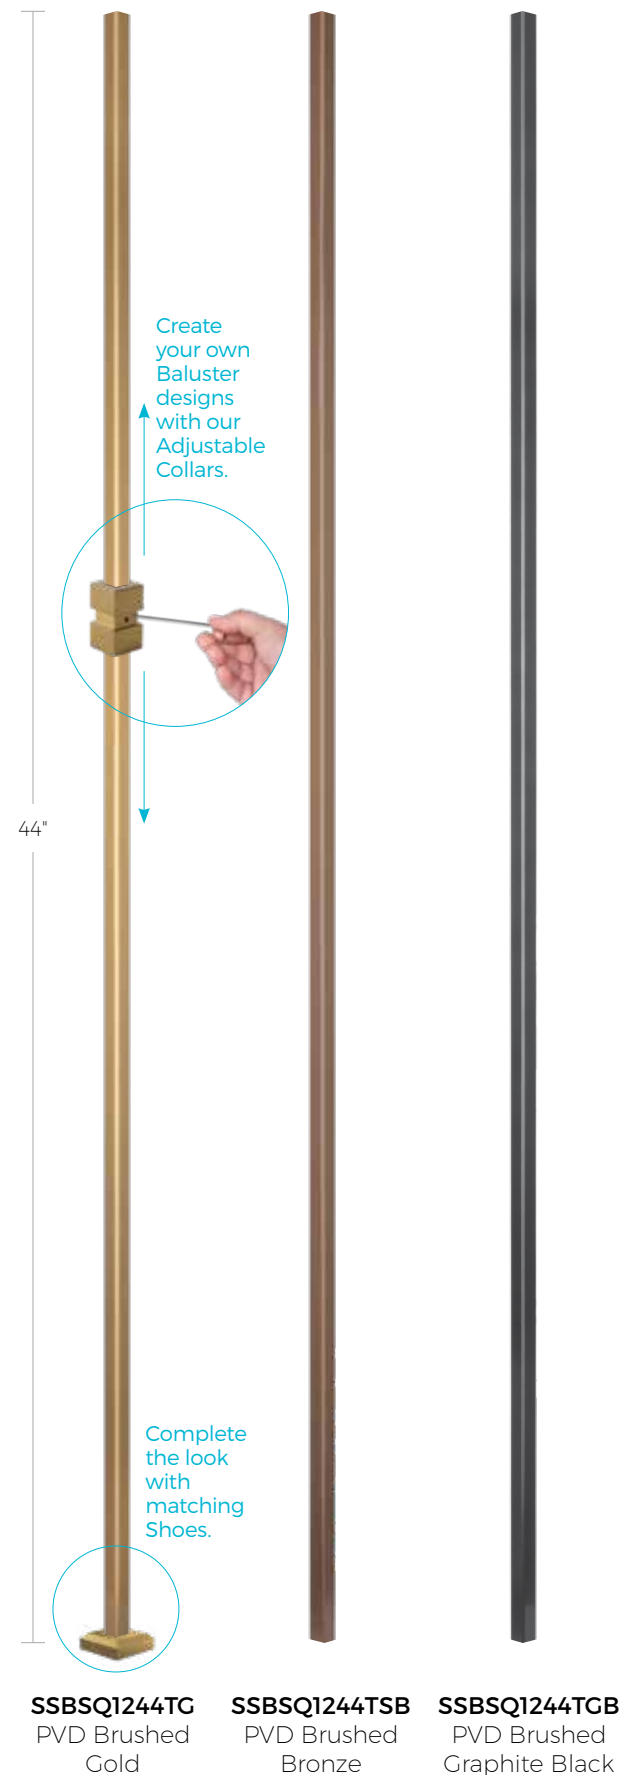
PVD
Brushed
Gold

PVD
Brushed
Bronze

PVD
Brushed
Graphite Black

Square 1/2" Coloured Stainless Steel Tube

Balusters



Collars

*Industrial design patent registered. NO.187510.



PSMC112SSSC
PVD Brushed Gold




PSMC112SSSB
PVD Brushed Bronze




PSMC112SSSGB
PVD Brushed Graphite Black

Shoes


*Industrial design patent registered. NO.156698.



SSSH1239G
PVD Brushed Gold



SSSH1239SB
PVD Brushed Bronze



SSSH1239GB
PVD Brushed Graphite Black

Round to Square Baluster Adapter Insert




EZI3412

- Fits in 3/4" round hole providing 1/2" square hole.
- Facilitates replacing wood pickets installed in 3/4" round hole with 1/2" square metal balusters.
- Can be used for new installation by drill and plug installation method.
- Applicable for stairs and landings baluster installations.
- Suits decorative shoes.

Round 5/8" Coloured Stainless Steel Tube

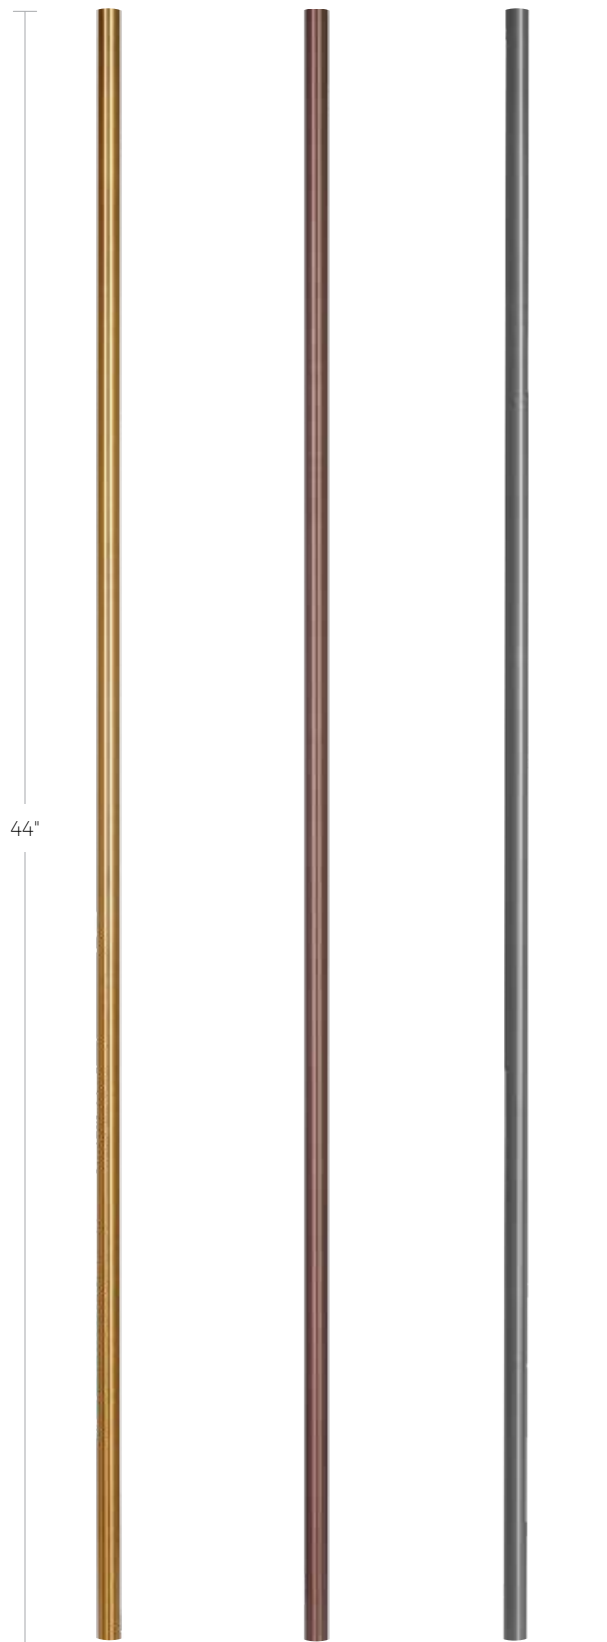Balusters



SSB5844TC
PVD Brushed
Gold

SSB5844TSB
PVD Brushed
Bronze

SSB5844TCB
PVD Brushed
Graphite Black

Collars



683RSS58G
PVD Brushed
Gold

683RSS58SB
PVD Brushed
Bronze

683RSS58GB
PVD Brushed
Graphite Black

Shoes


*Industrial design patent registered. NO.157438.



SSSHRD58G
PVD Brushed
Gold

SSSHRD58SB
PVD Brushed
Bronze

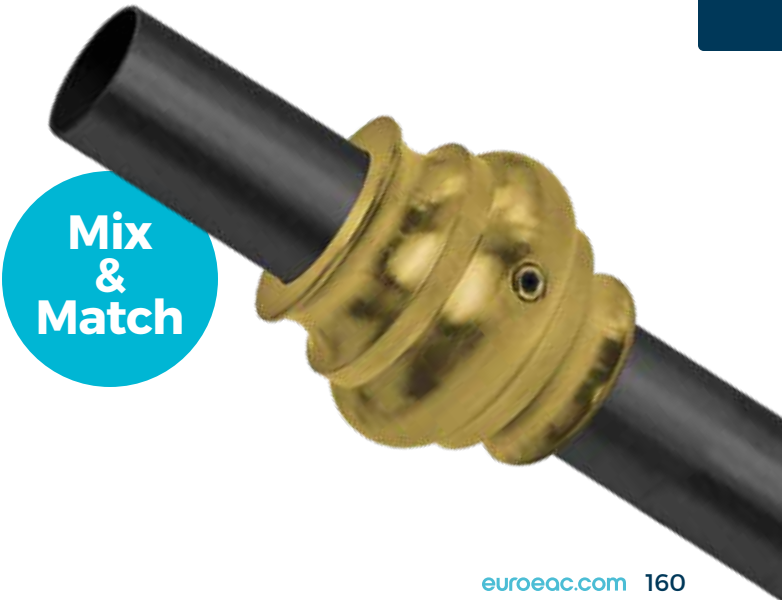SSSHRD58GB
PVD Brushed
Graphite Black



Balusters

Handrail Kit



See our
LumaRail™
LED-Ready
Spigot Kit on
page 27.



Add Safety and Beauty Inside Your Home.

LumaRail™ combines our Hardware Kit and Electrical Kit for 4877mm (16 ft.) of LED lighting for your choice of Handrail.

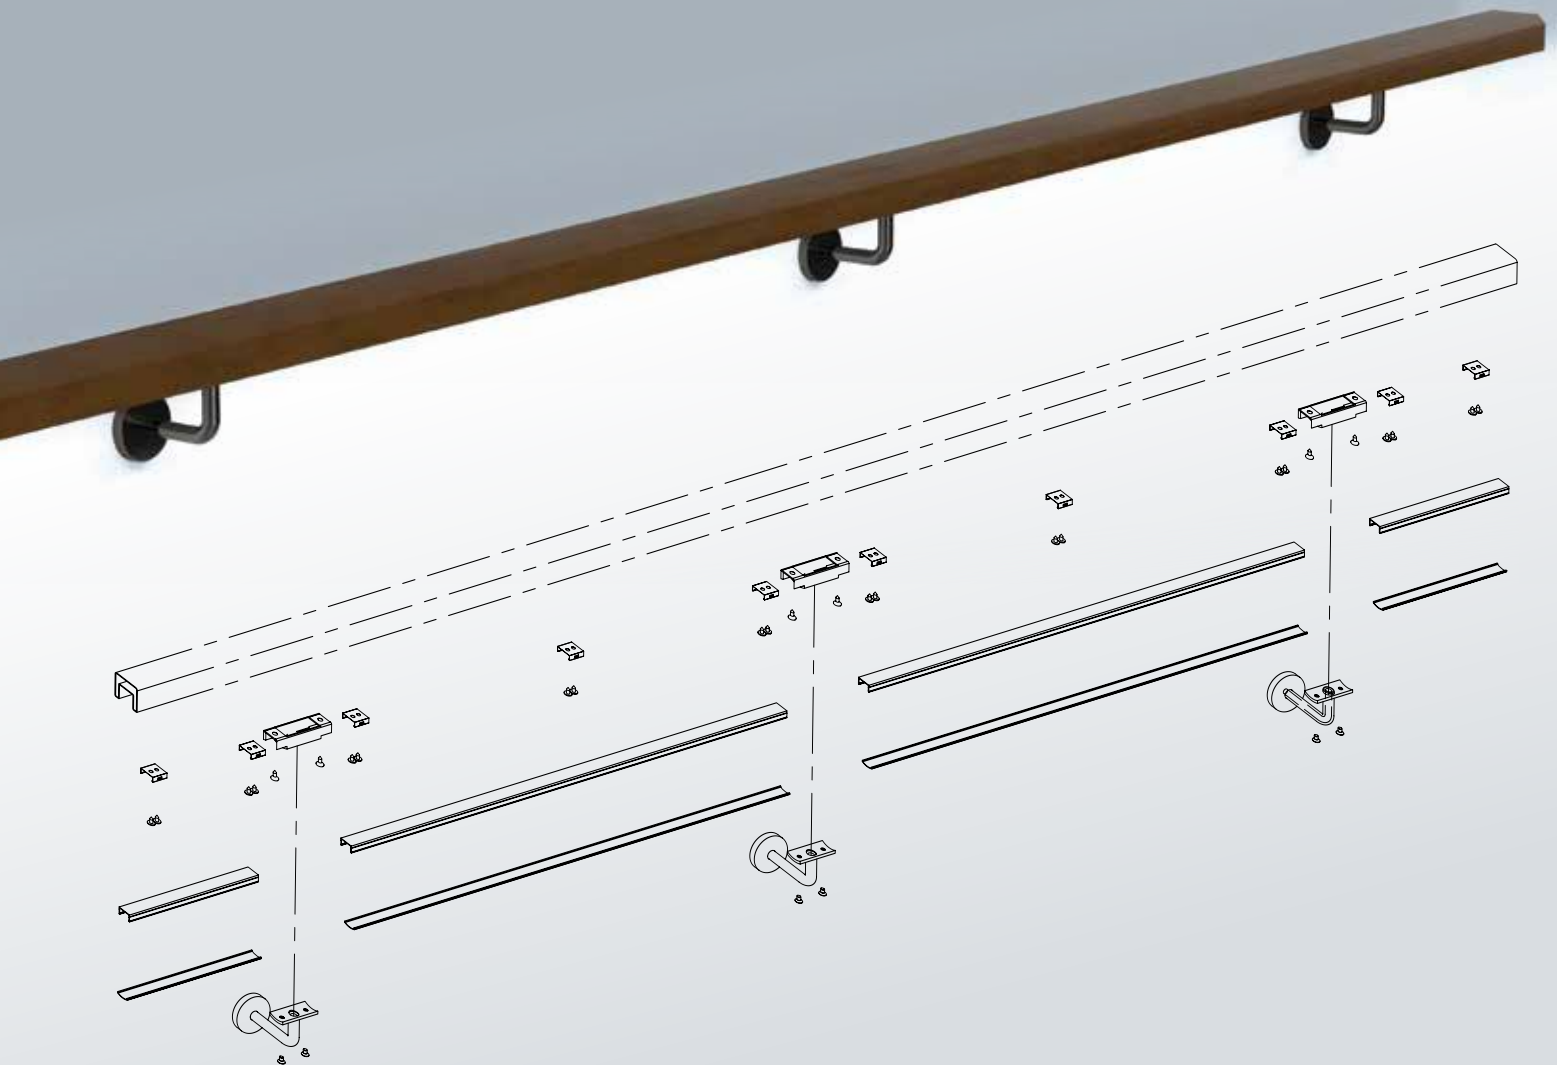
Hardware is SS316 Stainless Steel, and is available in Satin (S) and PVD Brushed Graphite Black (GB) finishes.

Electrical Kit is certified for Interior applications only.

All items can be purchased separately to accommodate desired length of Handrail.

Consult an electrician before installing.





Hardware Kit fits all Handrail profiles with a minimum of 24 x 24mm slot.

HANDRAIL OPTIONS (Not Included):

Stainless Steel

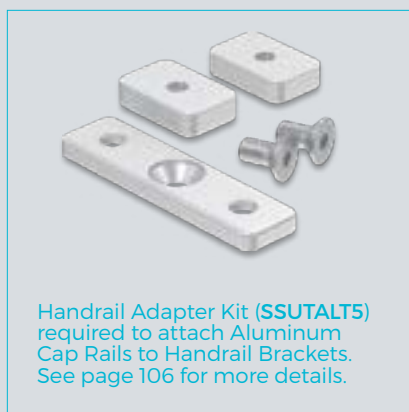
- SSUTRND4240** Round
- SSUTSQ400S** Square
- SSUTREC400** Rectangle
- SSUTREC600** Rectangle

Wood (Oak)

- WH4134324GO** Rectangle

Aluminum

- SSUTALROCA** Round Brushed Clear Anodized Aluminum.
- SSUTALROB** Round Brushed Black Anodized Aluminum.
- SSUTALSOCA** Square Brushed Clear Anodized Aluminum.
- SSUTALSOB** Square Brushed Black Anodized Aluminum.



Handrail Adapter Kit (**SSUTALT5**) required to attach Aluminum Cap Rails to Handrail Brackets. See page 106 for more details.

Hardware Kit (SSL1KIT)

Includes hardware for 4877mm (16 ft.) of LED lighting. Material is 316 Grade Stainless Steel.



SSL1WB101S
(x6) Adapter



SSWB111416S
(x4) Solid Wall Bracket 3" x 2"



SSL1WB100S
(x2) Wiring Wall Bracket 3" x 2"
Can be installed closer to available power supplies.



SSL1WB101GB
(x6) Adapter



SSWB111416GB
(x4) Solid Wall Bracket 3" x 2"



SSL1WB100GB
(x2) Wiring Wall Bracket 3" x 2"
Can be installed closer to available power supplies.

Electrical Kit (SSL2KITELEC) Supplies 16 ft. of lighting.



SSL2LED1
(x1) LED Strip 4200 K (Daylight)




SSL2LED2
(x1) 24V Power Supply (Dimmable)



SSL2LED3
(x1) LED Cable Connector Kit



SSL2LED4
(x4) Mounting Clips




SSL2LED5
(x2) LED Enclosure (8 ft.)
*Sold separately as individual 8' lengths.




SSUTALT5
Handrail Adapter Kit

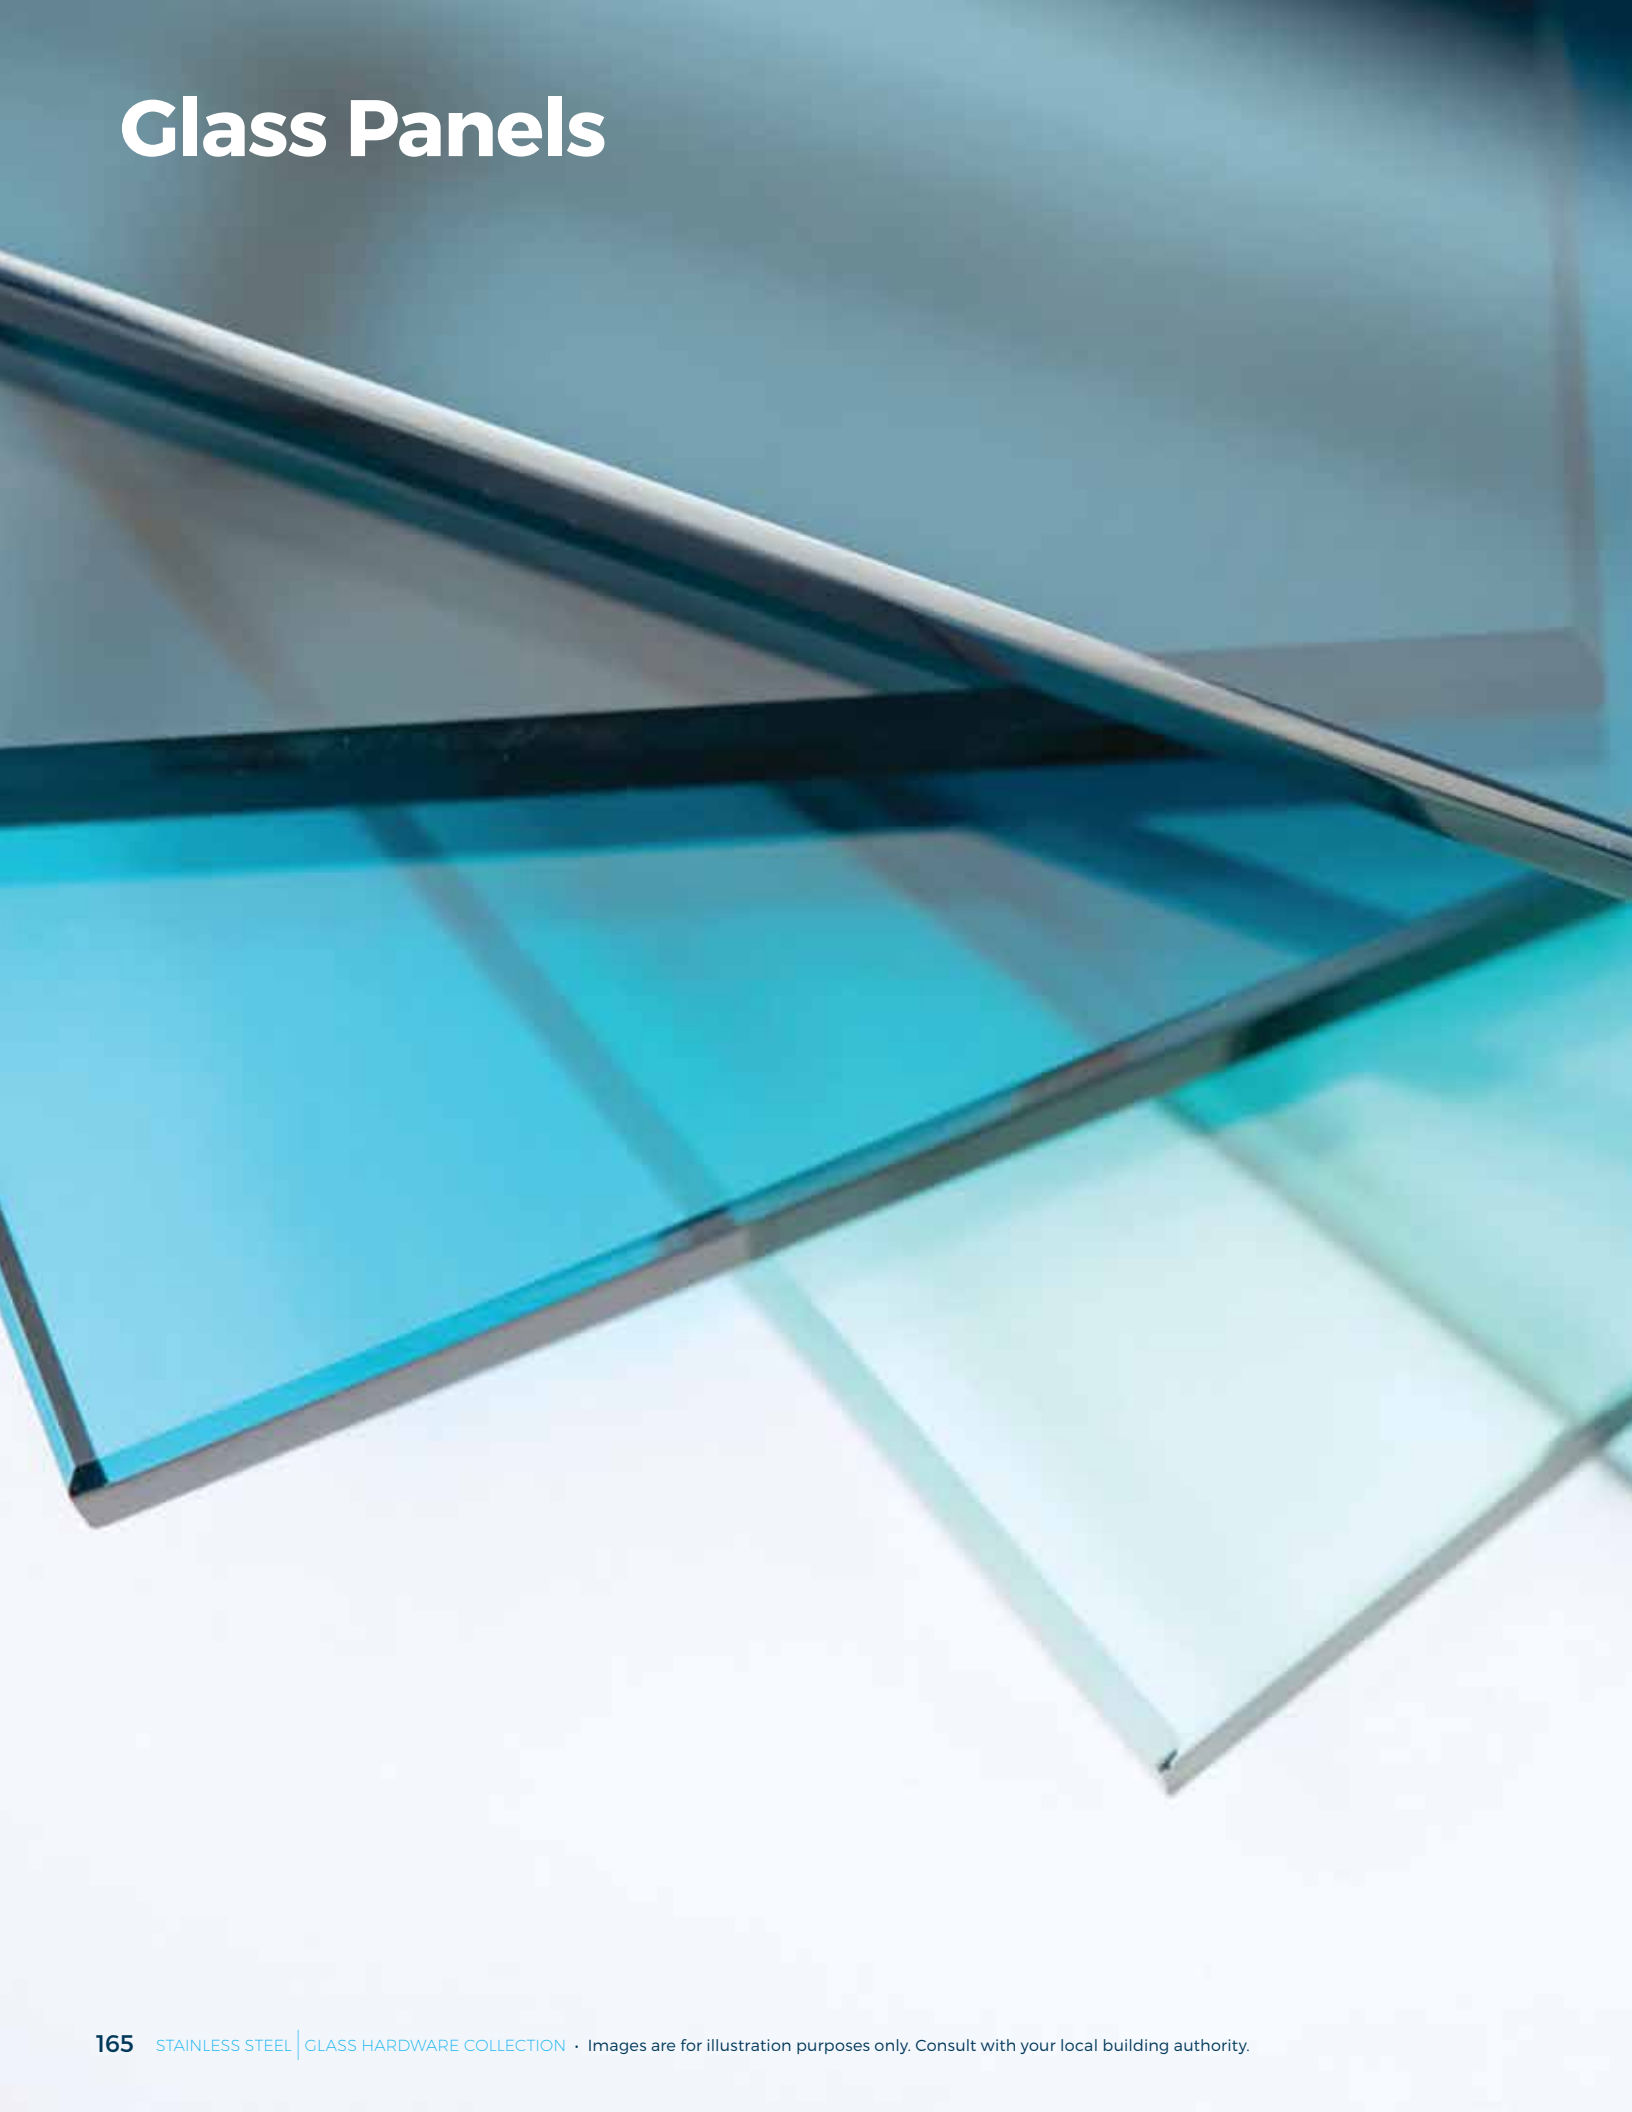Glass Panels





Glass Panels

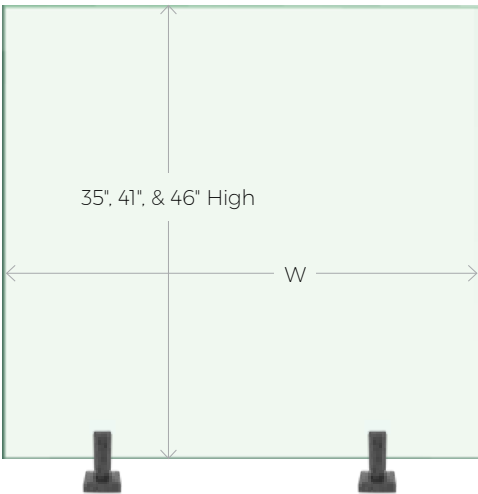

Plain Panel

35" High x W


PART #	W
GGT123530	30"
GGT123532	32"
GGT123534	34"
GGT123536	36"
GGT123538	38"
GGT123540	40"
GGT123542	42"
GGT123544	44"
GGT123546	46"
GGT123548	48"
GGT123550	50"
GGT123554	54"
GGT123560	60"
GGT123572	72"

41" High x W

PART #	W
GGT124112	12"
GGT124116	16"
GGT124118	18"
GGT124120	20"
GGT124122	22"
GGT124124	24"
GGT124126	26"
GGT124128	28"
GGT124130	30"
GGT124132	32"
GGT124134	34"
GGT124136	36"
GGT124138	38"
GGT124140	40"
GGT124142	42"
GGT124144	44"
GGT124146	46"
GGT124148	48"
GGT124150	50"
GGT124152	52"
GGT124154	54"
GGT124156	56"
GGT124158	58"
GGT124160	60"
GGT124162	62"
GGT124164	64"
GGT124166	66"
GGT124168	68"
GGT124172	72"

46" High x W

PART #	W
GGT124624	24"
GGT124628	28"
GGT124632	32"
GGT124636	36"
GGT124640	40"
GGT124642	42"
GGT124644	44"
GGT124646	46"
GGT124648	48"
GGT124650	50"
GGT124652	52"
GGT124654	54"
GGT124656	56"
GGT124658	58"
GGT124660	60"
GGT124662	62"
GGT124664	64"
GGT124666	66"
GGT124668	68"
GGT124670	70"
GGT124672	72"

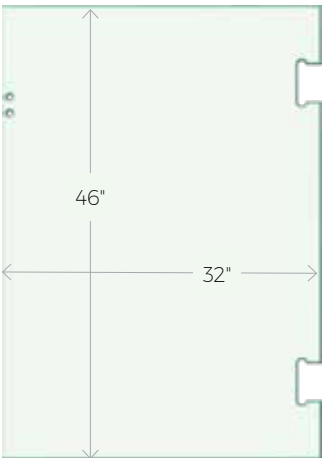


Gate Panel

Series 1

PART #	H	W
GGT124632G1	46"	32"

Series 2

PART #	H	W
GGT124632G2	46"	32"

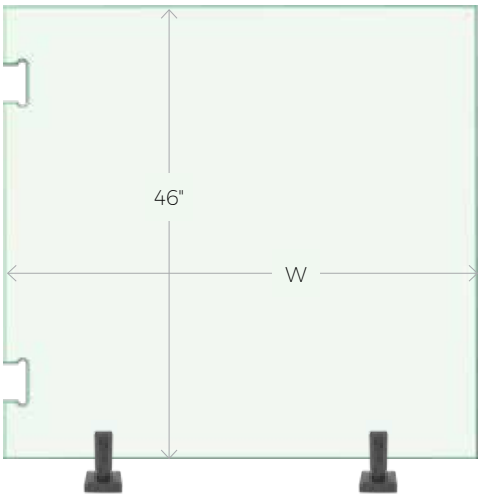

Hinge Panel

Series 1

PART #	H	W
GGT124648G1	46"	48"

Series 2

PART #	H	W
GGT124648G2	46"	48"
GGT124654G2	46"	54"
GGT124660G2	46"	60"

Series 1 and Series 2 Gate and Hinge Panels have designated cut-outs to accommodate the Hinges and latches specified on the opposite page.




Glass Profile

4'x8' Corrugated Polycarbonate Sheets

Use Corrugated Polycarbonate sheets for precise glass templates.

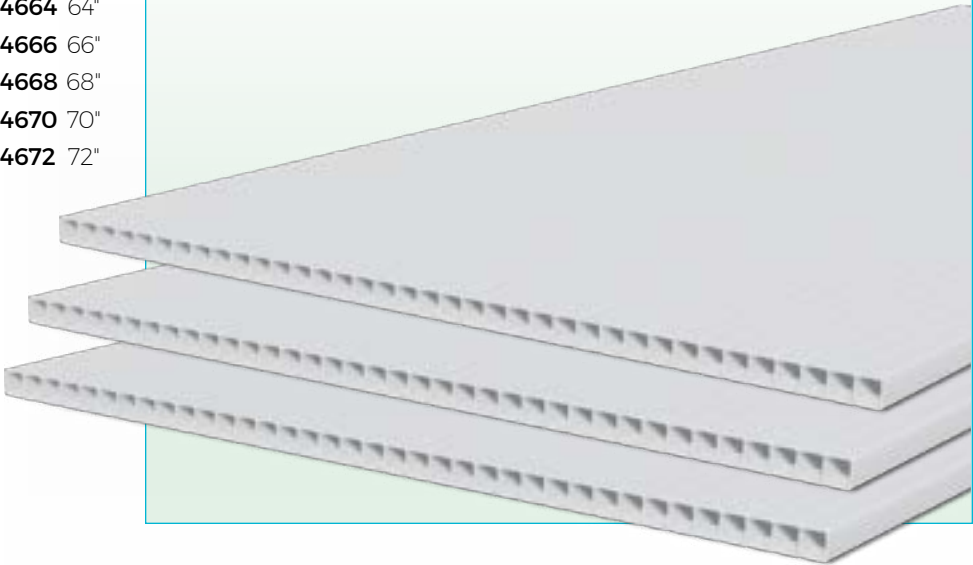GGCS5324896



Hinges for Pre-cut Panels

Use with Series ① Panels.



Glass to Glass

PART #	Type
SSPFHHGGS	Hydraulic
SSPFHHGGB	Hydraulic



Glass to Wall / Square Post

PART #	Type
SSPFHHGWS	Hydraulic
SSPFHHGWB	Hydraulic



Glass to Post for
40&50mm Square Post

PART #	Type
SSPFHHGWSX	Hydraulic
SSPFHHGWBX	Hydraulic

Use with Series ② Panels.



Glass to Glass

PART #	Type
SSPFH200GS	Hydraulic
SSPFH200GB	Hydraulic



Glass to Wall or Square Post

PART #	Type
SSPFH200WS	Hydraulic
SSPFH200WB	Hydraulic

Glass Handling



Glass Trolleys

PART #	Size (LxWxH)
GGTTROLLEYS	1000 x 1100 x 1120mm
GGTTROLLEY	1500 x 1100 x 1120mm



Single Cup Lifter

PART #	Capacity
SSLIFTELITE	57kg / 125 lbs.



Double Cup Lifter

PART #	Capacity
SSLIFTELITE2	60kg / 132 lbs.

Latches for Pre-cut Panels

Use with Series ① Panels.



Glass to Glass 180°

PART #	Type
SSPFGL201S	Standard Keyed
SSPFGL201B	Standard Keyed



Glass to Glass 90°

PART #	Type
SSPFGL202S	Standard Keyed
SSPFGL202B	Standard Keyed



Glass to Wall

PART #	Type
SSPFGL203S	Standard Keyed
SSPFGL203B	Standard Keyed

Friction Fit Latches

No holes or cut outs required.



Glass to Glass

PART #	Type
SSPFGL1801FS	Hydraulic
SSPFGL1801FB	Hydraulic



Glass to Wall / Square Post

PART #	Type
SSPFGLWFS	Hydraulic
SSPFGLWFB	Hydraulic

Glass Care



Sprayway Glass Cleaner

PART #	Size
GGCLEANER	539g / 19 oz.



Glass Scrub®
Water Spot & Stain Remover


PART #	Size
GGCLEANER2	500mL / 16 fl. oz.



Invisible Shield®
Protective Glass & Surface Coating

PART #	Size
GGCLEANER3	500mL / 16 fl. oz.

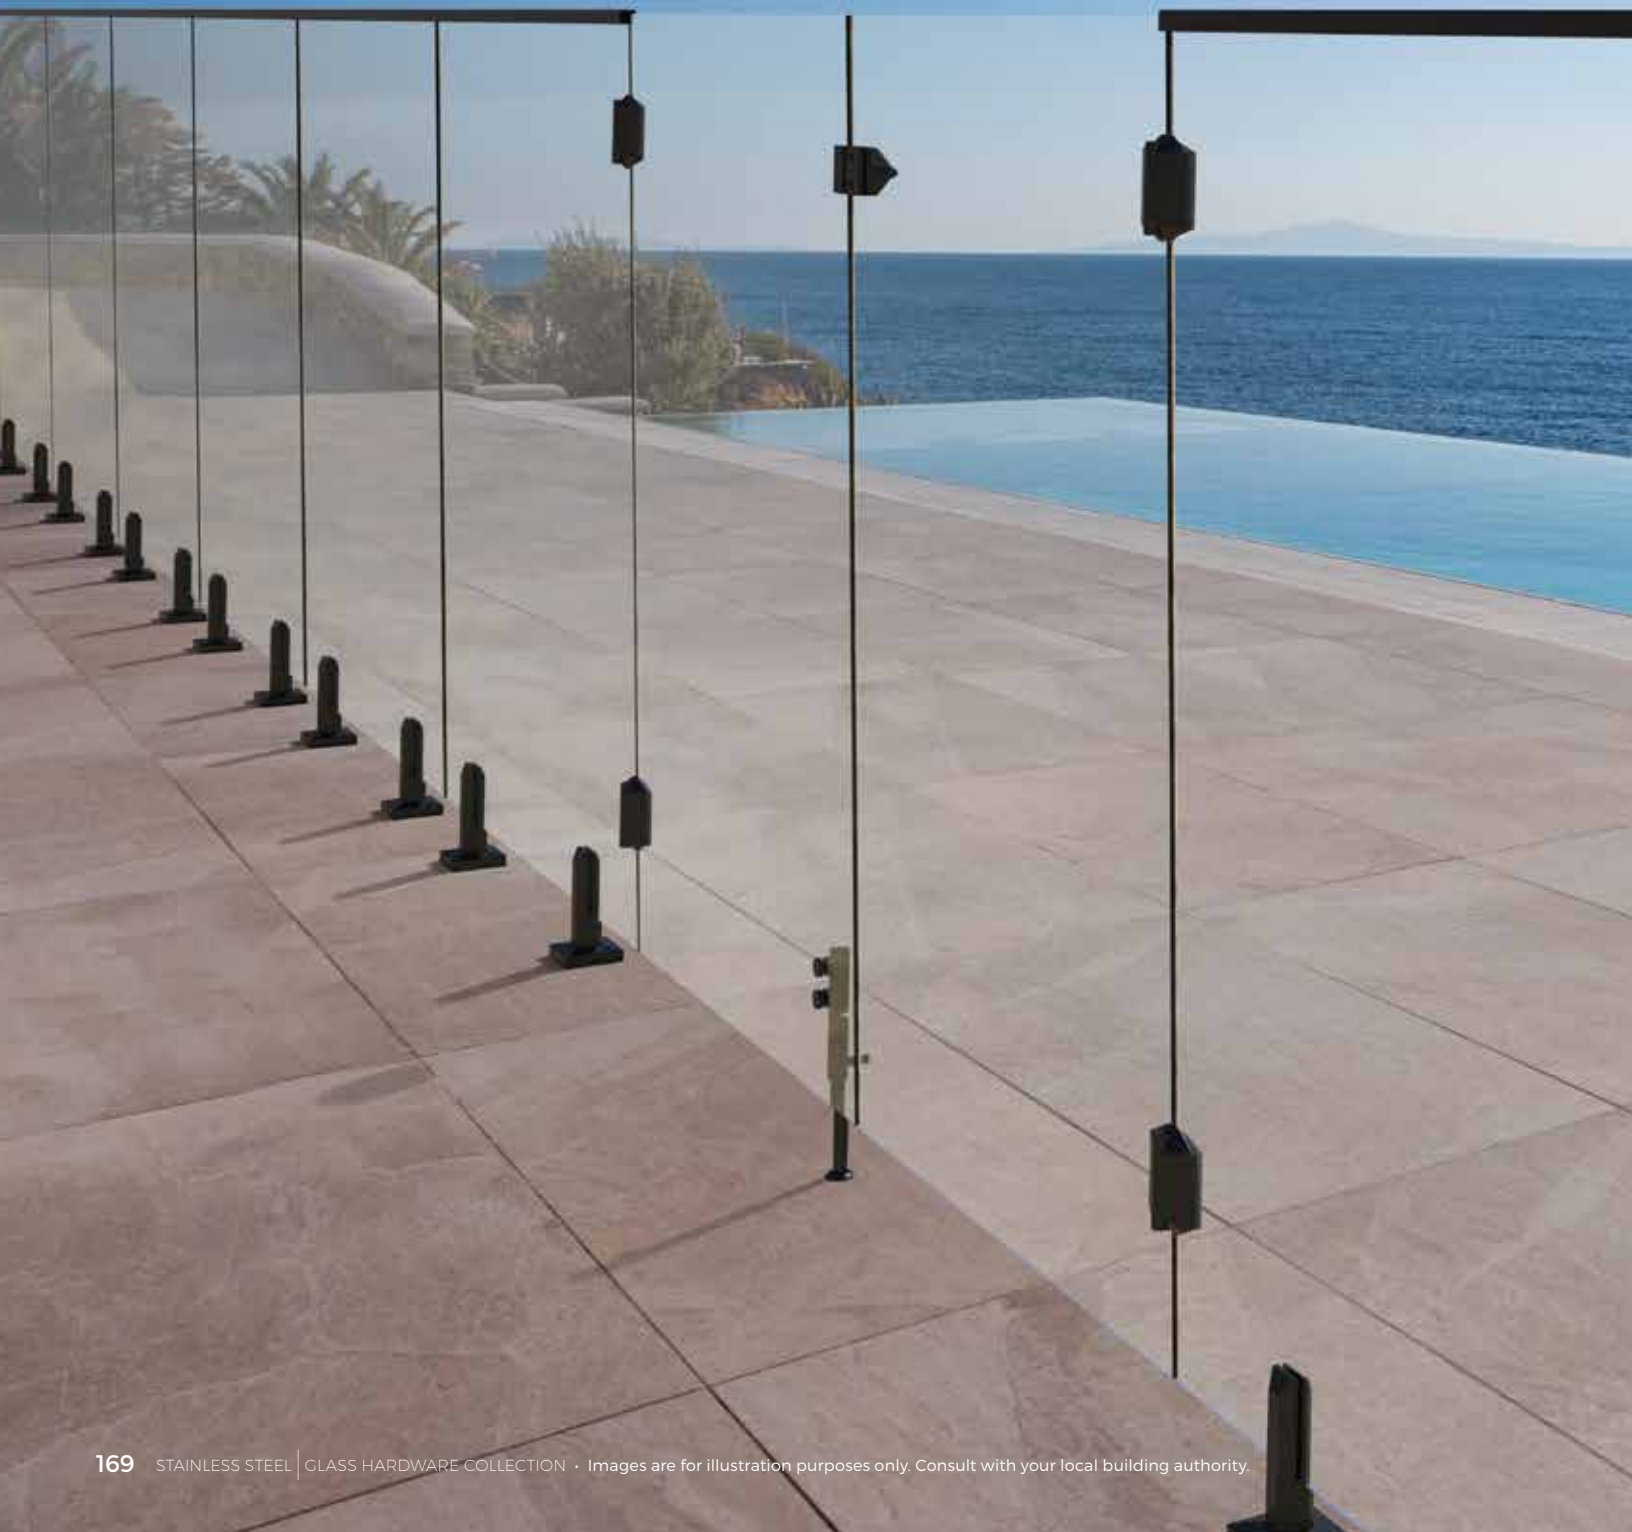Glass Pool Gate Hardware





Hinges & Latches

Engineered for Performance. Designed for timeless aesthetic.

EAC Hinges and Latches are built from SS316 or Duplex 2205 Marine Grade Stainless Steel, making them ideal for both interior and exterior frameless glass installations. They're designed to endure harsh environments without compromising style or function. Offered in Satin Stainless Steel and Satin Black, they bring a clean, modern look to any space while delivering long-term durability.

These components accommodate 8-12mm glass and are available for a variety of configurations, including Glass-to-Glass, Glass-to-Wall, and Glass-to-Square Post applications. Every piece is designed to provide a strong, lasting hold for frameless glass gates or doors. For compatible glass panels, please refer to page 169.

Our hydraulic hinges feature adjustable closing speed for a smooth, soft-close experience—no matter the gate weight. The Series 200 Hydraulic Hinge is chemical resistant and suitable for wet or exterior use, making it a reliable choice for demanding environments. Its minimalist stainless steel design not only adds durability but also enhances the overall architectural aesthetic of any frameless system.

EAC latches complete the system with security and style. Designed for 180° and 90° Glass-to-Glass as well as Glass-to-Wall configurations, they provide a cohesive look across your project. The self-latching function ensures the gate locks automatically when closed—removing the need for manual locking and enhancing overall safety. Our exclusive friction-fit latches install cleanly without requiring holes or cut-outs in the glass, while still holding the panel securely for the life of the installation.

The Series 200 Latches feature concealed fixings and are available with either traditional polymer caps or full stainless steel finishes to match the Series 200 Hinges. Together, they offer a seamless look and dependable performance.

To further enhance security and function, EAC introduces the new 6" Door Stop—a dependable addition to any frameless glass gate. It features lockable positions at both the top and bottom, allowing the gate to stay securely closed when needed while preventing dragging during use. Available in Satin Stainless Steel and Powder Coated Satin Black, the 6" Door Stop is a simple yet highly effective way to enhance both the function and longevity of your frameless glass installation.


EAC Self Closing Hydraulic Hinges Use with Series 1 Panels (Pg 169).

- Made of SS316.
- Maximum Door leaf weight: 65kg/pair (143 lb/pair).
- Maximum Door leaf width: 1000mm.
- Self-closing, double action; maximum door open angle: 95°.
- Non-hold configuration with adjustable closing speed control.

Glass Unit Weights

GLASS THICKNESS:	8mm	10mm	12mm
Glass Weight kg/m ² (lb/ft ²)	18.2 (3.7)	22.7 (4.6)	27.3 (5.6)

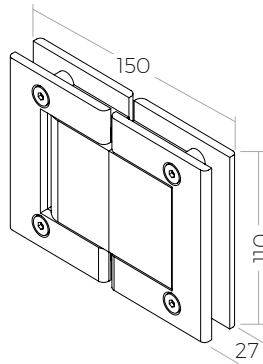
**Glass Gate Posts are available.
See #13 on page 72 for details.**



Glass to Glass 180°

PART # Finish


SSPFHHGGS	S
SSPFHHGGB	B NEW



Glass to Wall / Square Post

PART # Finish

SSPFHHGWS	S
SSPFHHGWB	B NEW



Glass to Post for 40&50mm Square Post **NEW**

PART # Finish



SSPFHHGWSX	S
SSPFHHGWBX	B

155 Series Stainless Steel Soft Close / Self Close Steel Hinge.

Hole required for installation, no cut-outs required. Retrofit for Spring Loaded Hinges.

S
Satin
Stainless
Steel



B
Powder
Coated
Satin Black



Glass to Glass 180°

Retrofit for **SSPFHSLGGS**.

PART #	Finish
SSPFH155GS	S
SSPFH155GB	B






Glass to Wall / Square Post 180°

Retrofit for **SSPFHSLGWS**.

PART #	Finish
SSPFH155WS	S
SSPFH155WB	B

156 Series Stainless Steel Soft Close / Self Close Steel Hinge.

Satin with Black Covers (compatible with spray paint). Designed for Metal & Wood Doors and Gates.



Glass to Wall / Square Post 180°

PART #	Finish
SSPFH156B	Satin with Black Covers



Glass
Thickness
8-12mm



**DUPLEX
2205**
Marine Grade
Stainless Steel



S
Satin
Stainless
Steel



B
Powder
Coated
Satin Black

**NEW
PRODUCT**


INTRODUCING

SERIES 200

Latches & Hinges
for Glass Pool Fencing


200 Series Hinge Use with Series 2 Panels (Pg 169).

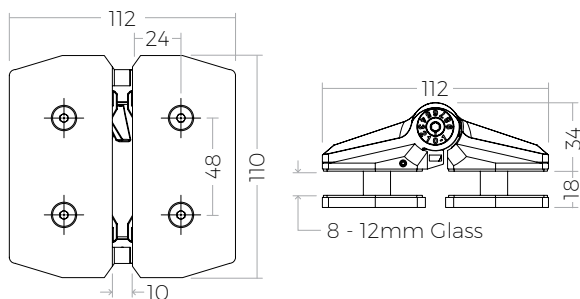- Soft close hinge
- Duplex 2205 Marine Grade stainless steel.
- Weight capacity: 45 kg per pair.
- Adjustable closing speed with an Allen key.
- Needs holes or cutouts on the gate to secure.
- Complies with Canadian standards for pool fencing.



Glass to Glass

PART #	Finish
SSPFH200GS	S
SSPFH200GB	B

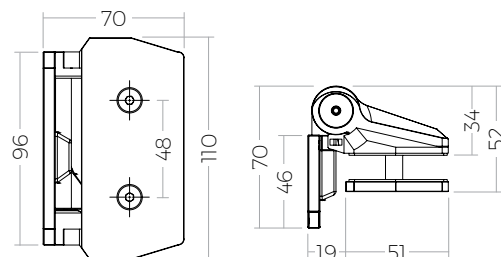




Glass to Wall

PART #	Finish
SSPFH200WS	S
SSPFH200WB	B



200 Series Keyed Latches Use with Series 1 Panels (Pg 169).

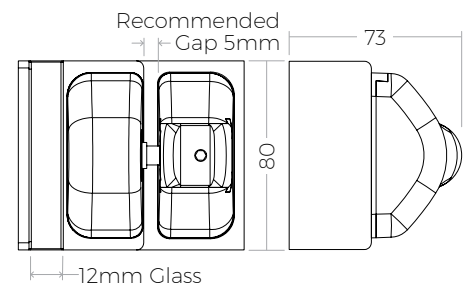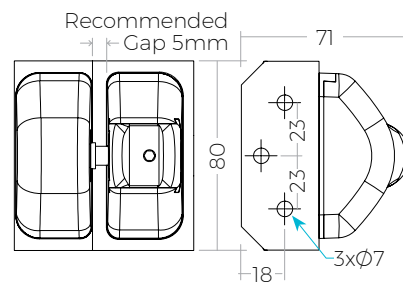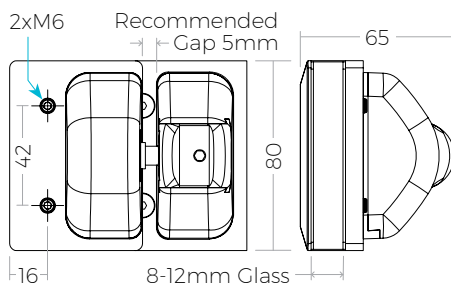- Available in traditional polymer cap, lockable, and full stainless steel variations.
- Made of 2205 Marine Grade Stainless Steel
- Hidden fixing feature creates a sleek & stylish look.
- No hole required on the side panel.
- Self-latching when the gate is closed.



Glass to Glass 180°


PART #	Finish
SSPFGL201S	S
SSPFGL201B	B

Glass to Glass 90°

PART #	Finish
SSPFGL202S	S
SSPFGL202B	B

Glass to Wall


PART #	Finish
SSPFGL203S	S
SSPFGL203B	B



EAC Friction Fit

2205 Duplex Marine Grade Stainless Steel Latch

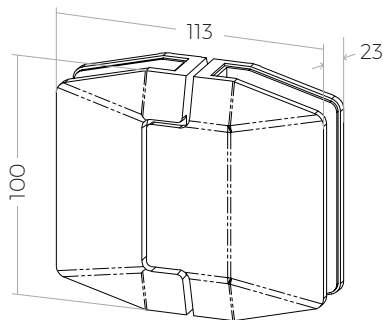No holes or cut-outs required on glass. Includes D&D Keyed Latch (Part # MLSPS2L). See next page.




3mm recommended gap



Glass to Glass 180°

PART #	Finish
SSPFGL1801FS	S
SSPFGL1801FB	B



3mm recommended gap





Glass to Wall or Square Post

PART #	Finish
SSPFGLWFS	S
SSPFGLWFB	B





316 Grade Stainless Steel Latch

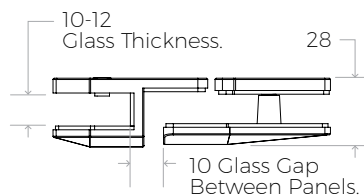Use with our Series 2 pre-cut Glass Panels for optimal results. See page 169



Glass to Glass

PART #	Finish
SSPFGL601GS	S
SSPFGL601GB	B



Glass to Wall or Square Post

PART #	Finish
SSPFGL601WS	S
SSPFGL601WB	B


D&D MagnaLatch with Lock




D&D MagnaLatch is Included with both Polaris and Euro Friction Fit Glass Gate Latches to create a lockable Gate. See previous page.



PART # MLSPS2L




Shown with SSPFGL601 Polaris Latch.

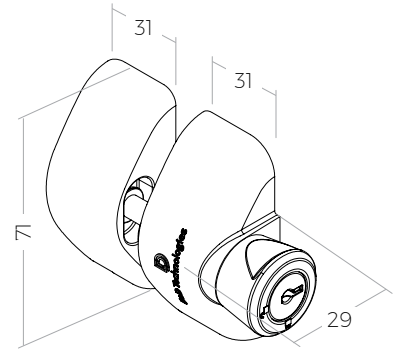

EAC Door Stop

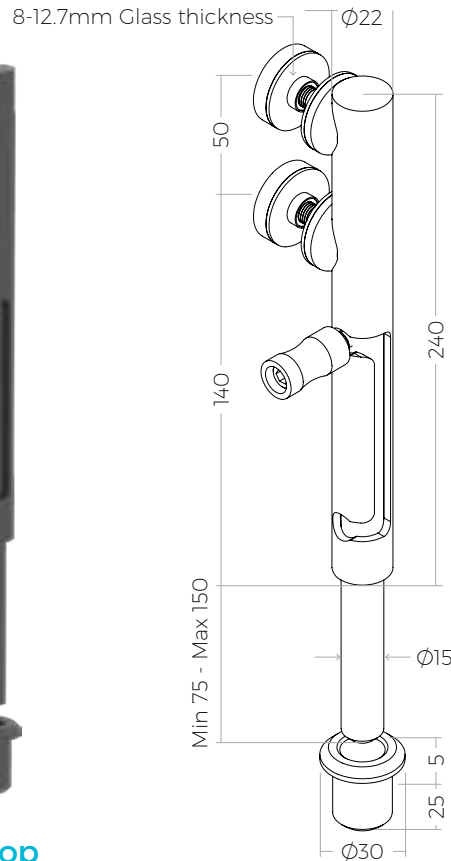- Equipped with a lockable mechanism at both top and bottom positions.
- Includes 2 floor flanges.
- Additional Floor Flanges available (SSPFSTOPIX)



*Floor Flange secured by #14 Flat Head Screw (not included).

Stainless Steel Door Stop

PART #	SS Grade	Finish
SSPFSTOPIX	316	S
SSPFSTOPIB	316	B



Glass Pool Gate Hardware

Glass Door Hardware





Patch Fittings



Handles



Locks




Glass Wall Channels

Patch Fittings



Glass
Thickness
8-13mm



A
Brushed Clear
Anodized
Aluminum



S
Satin
Stainless
Steel



B
Powder
Coated
Satin Black





Hydraulic Patch Door Kit

Includes Bottom and Top Patch with Pivot Bracket.

SSGWPF90 90° Hold open.

SSGWPFNH Non-hold open.



Pivot Bracket for Top Patch


SSGWPFPIVOT

Used with all finishes.




Top / Bottom Patch

SSGWPFX6




Sidelite Transom Patch

SSGWPFX1




Sidelite Transom Patch with Stopper

SSGWPFX2



Sidelite Mount Transom Patch


SSGWPFX3



Wall Mount Transom Patch


SSGWPFX4

Patch Fitting Configurations



1. SSGWPF90 SSGWPFNH

Hydraulic Patch Door Kit (90° Hold open), or
Hydraulic Patch Door Kit (Non-hold open).




Maximum
Door Width
1000mm (39 3/8")



Glass
Thickness
8-13mm (5/16"-1/2")



Maximum
Door Weight
100kg (220 lbs)



1a SSGWPF90 SSGWPFX5

Hydraulic Patch Door Kit (90° Hold open).
Cladding Cover Plate for Top Patch. (Except for SA finish).

1b SSGWPFNH SSGWPFX5


Hydraulic Patch Door Kit (Non-hold open).
Cladding Cover Plate for Top Patch. (Except for SA finish).

2 SSGWPFX4

Wall Mount Transom Patch.

3 SSGWPFX4 SSGWPFSTOP

Wall Mount Transom Patch.
Door Stop for Transom Patch (Optional - not included).



1a SSGWPF90 SSGWPFX5

Hydraulic Patch Door Kit (90° hold open).
Cladding Cover Plate for Top Patch. (Except for SA finish).

1b SSGWPFNH SSGWPFX5

Hydraulic Patch Door Kit (Non-hold open).
Cladding Cover Plate for Top Patch. (Except for SA finish).

2 SSGWPFX4

Wall Mount Transom Patch.

3a SSGWPFX1 SSGWPFX2


Sidelite Transom Patch, or
Sidelite Transom Patch with Stopper.

3b SSGWPFX3 SSGWPFSTOP

Sidelite Mount Transom Patch.
Door Stop for Transom Patch (Optional - not included).



Glass Door & Wall Hardware



1a SSGWPF90 SSGWPFX5

Hydraulic Patch Door Kit (90° hold open).
Cladding Cover Plate for Top Patch. (Except for SA finish).

1b SSGWPFNH SSGWPFX5


Hydraulic Patch Door Kit (Non-hold open).
Cladding Cover Plate for Top Patch. (Except for SA finish).

2 SSGWPFX3

Sidelite Mount Transom Patch.

3 SSGWPFX4 SSGWPFSTOP

Wall Mount Transom Patch.
Door Stop for Transom Patch (Optional - not included).



1a SSGWPF90 SSGWPFX5

Hydraulic Patch Door Kit (90° hold open).
Cladding Cover Plate for Top Patch. (Except for SA finish).

1b SSGWPFNH SSGWPFX5

Hydraulic Patch Door Kit (Non-hold open).
Cladding Cover Plate for Top Patch. (Except for SA finish).

2 SSGWPFX3


Sidelite Mount Transom Patch.

3a SSGWPFX1 SSGWPFX2

Sidelite Transom Patch, or
Sidelite Transom Patch with stopper.

3b SSGWPFX3 SSGWPFSTOP


Sidelite Mount Transom Patch.
Door Stop for Transom Patch (Optional - not included).



A
Brushed Clear
Anodized
Aluminum

S
Satin
Stainless
Steel


B
Powder
Coated
Satin Black



Cladding Cover Plate for Top Patch

Fits **SSGWPFX6**.


- SSGWPFX5SA** Brushed Clear Anodized Aluminum.
- SSGWPFX5SS** Satin Stainless Steel.
- SSGWPFX5B** Powder Coated Satin Black.



Door Stop for Transom Patch

- Used for all finishes.

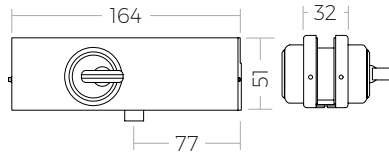
SSGWPFPSTOP



Bottom Mount Patch Lock with Strike Plate

- Installed at the bottom corner of the Glass Door.
- Glass-to-Floor applications.
- American type cylinder.
- Stainless Steel Cover with Aluminum Cast Body.


- SSGWPFX7SA** Brushed Clear Anodized Aluminum.
- SSGWPFX7SS** Satin Stainless Steel.
- SSGWPFX7B** Powder Coated Satin Black.



Center Mount Patch Lock with Strike Plate

- Glass-to-Wall applications.
- Installed vertically at the side of the Glass Door.
- American type Cylinder.
- Stainless Steel Cover with Aluminum Cast Body.

- SSGWPFX8SA** Brushed Clear Anodized Aluminum.
- SSGWPFX8SS** Satin Stainless Steel.
- SSGWPFX8B** Powder Coated Satin Black.



Strike Box for Patch Lock

- Used with Center Mount Patch Lock.
- Installed on Sidelite for Glass-to-Glass Patch Lock applications.

- SSGWPFX9SA** Brushed Clear Anodized Aluminum.
- SSGWPFX9SS** Satin Stainless Steel.
- SSGWPFX9B** Powder Coated Satin Black.

Round Ladder Pull Handles



Standard Non-Lockable

- Modern and elegant design for office and commercial settings.
- Non-Lockable Ladder Handles with 1 1/4" diameter available in 6 heights.
- SS316 material with accompanying 1 1/4" Washers.
- Suitable for **8-12mm** Glass.
- Glass hole size is 9/16".

PART #	Height (H)	Hole Space (C)	Tube Thickness	Finish
SSGWPFY12S	12"	6"	1/16"	S
SSGWPFY12B	12"	6"	1/16"	B
SSGWPFY24S	24"	12"	1/16"	S
SSGWPFY24B	24"	12"	1/16"	B
SSGWPFY36S	36"	24"	1/16"	S
SSGWPFY36B	36"	24"	1/16"	B
SSGWPFY48S	48"	36"	1/16"	S
SSGWPFY48B	48"	36"	1/16"	B
SSGWPFY60S	60"	48"	1/8"	S
SSGWPFY60B	60"	48"	1/8"	B
SSGWPFY72S	72"	60"	1/8"	S
SSGWPFY72B	72"	60"	1/8"	B




Lockable



- Modern and elegant design for office and commercial settings.
- Lockable Ladder Handle with 1" diameter available in 48 3/8" height.
- Suitable for **10-12mm** Glass.
- Glass hole size is 9/16".

PART #	Height (H)	Hole Space	Tube Thickness	Finish
SSGWPFZ48S	48 3/8"	7 7/8" top 30 11/16" bottom	1/16"	S

Magnetic Lock



This series of M-Locks incorporates a Magnetic Lock/Latch at its core. With only 31mm thickness, this sleek, stylish, and quiet Lock Set is a superior choice to traditional Lock Sets.

The Lock Set material is Aluminum with options for Single Action and Dual Action. There are 3 designs, including Lockable, Non-Lockable, and with Knob. Available in 2 finishes: Brushed Clear Anodized Aluminum (A) and Brushed Black Anodized Aluminum (B).



Other side

PART #	Description
SSGWLM1	Lockable, Single Action - Key, Thumbturn, and Handles included.



SSGWLM2	Non-lockable, Single Action - Handles included.
----------------	---



Other side

SSGWLM3	With Knob, Single Action - Thumbturn and Handles included.
----------------	--



Other side

PART #	Description
SSGWLM4	Lockable, Dual Action - Key, Thumbturn, and Handles included.



SSGWLM5	Non-lockable, dual Action - Handles included.
----------------	---



Other side

SSGWLM6	With Knob, Dual Action - Thumbturn and Handles included.
----------------	--



M-Lock Single Action

The M-Lock Single Action Lock Set is for doors that only swing in one direction. The design of the Wall Strike has a ledge to prevent the door from swinging in both directions. Also, the indentation on the M-Lock Single Action sits against the ledge of the Wall Strike. Only Wall Strike is included with the Single Action Lock Set.

Specifications

- Door Type: Glass.
- Usage: Hinge Door.
- Hanging Position / Opening Side: Reversible for Left or Right.
- Strike Plate Type: Wall Strike.
- Dimensions (L x W x H): 120 x 31 x 70mm.
- Door Thickness: **8-12.76mm**.
- Material: Aluminum.

M-Lock Dual Action

The M-Lock Dual Action Lock Set is for doors that can swing freely in both directions. The Wall Strike does not have a ledge on it, and the lock does not have the same indentation as the M-Lock Single Action. Both Wall and Glass Strikes are included with the Dual Action Lock Set.

Specifications

- Door Type: Glass.
- Usage: Hinge Door.
- Hanging Position/Opening Side: Reversible for Left or Right.
- Strike Plate Type: Wall Strike and Glass Strike.
- Dimensions (L x W x H): 120 x 31 x 70mm.
- Door Thickness: **8-12.76mm**.
- Material: Aluminum.

Electronic Lock



This E-Lock is a Wireless Electronic Lock for Swing and Sliding Glass Doors that combines functionality with versatility. Keyless entry and no wiring needed. Available in Black.



PART #	Description
SSGWLEGG	Glass-to-Glass Applications.
SSGWLECW	Glass-to-Wall Applications.

E-Lock



Features

- No Glass processing is required.
- Easy to install.
- Battery powered with 4 x AA 6V batteries required (not included).
- 4 locking/unlocking modes:
 1. Bluetooth via a downloadable smartphone app.
 2. Fingerprint.
 3. Numerical code.
 4. FOB badge.
- Possibility to generate timed entrance and unlocking codes.
- Record of access available via downloadable app.

Specifications

- Door Type: Glass.
- Usage: Hinge Door, Sliding Door.
- Hanging Position/Opening Side: Reversible for Left or Right.
- Strike Plate Type: Glass Strike.
- Dimensions (W x H): 63 x 162mm.
- Door Thickness: **10-12mm**.
- Working Temperature: -25°C-60°C.
- Working Humidity: 20%-90%.
- Material: Metal.




Glass Wall Channel Kits





The Glass Channel Kit creates a safe and clean, modern finish to your Glass Walls or Partitions.

- Packed as a 12 ft. Kit, including top and Bottom Channels, End Caps, and Gaskets.
- Designed for Top and Side Mount applications.
- Easy installation with removable Cover.
- Full-frame Glazing (4 sides) possible.
- Engineered based on the Building Code sec. 4.1.5.14 "Loads on Guards", and 4.1.5.16 "Loads on Walls Acting as Guards", and CAN/CSB 12.20-M89.



SSGWCH200A

Brushed Clear Anodized Aluminum


SSGWCH200B

Brushed Black Anodized Aluminum




Glass Channel Kit

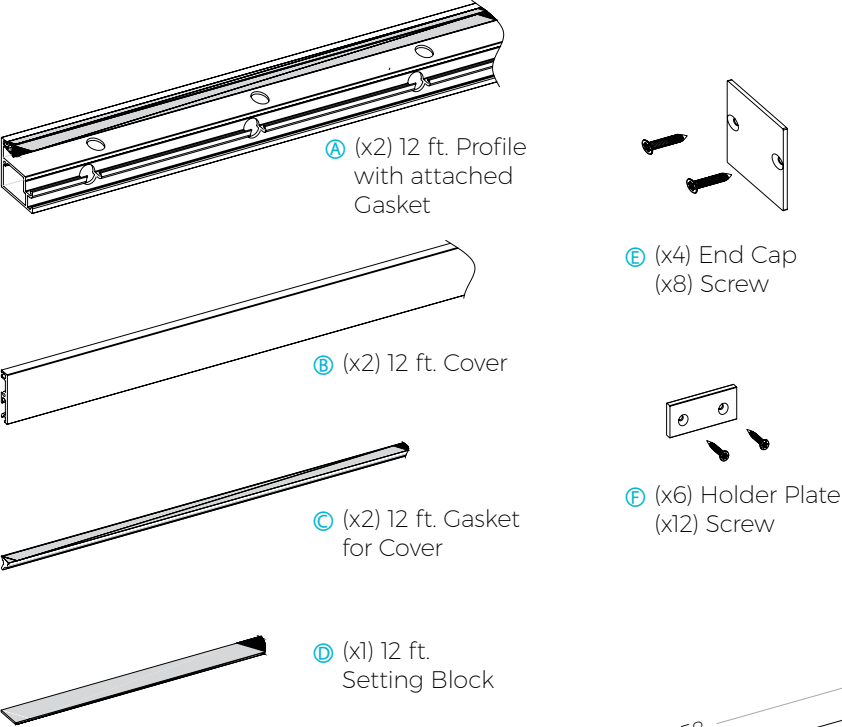
Kit Includes





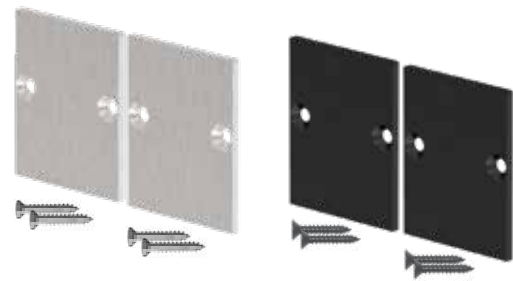Need extra End Caps?
Sold separately in packs of 2



PART #	Finish
SSGWCH200ECA	Brushed Clear Anodized Aluminum
SSGWCH200ECB	Brushed Black Anodized Aluminum

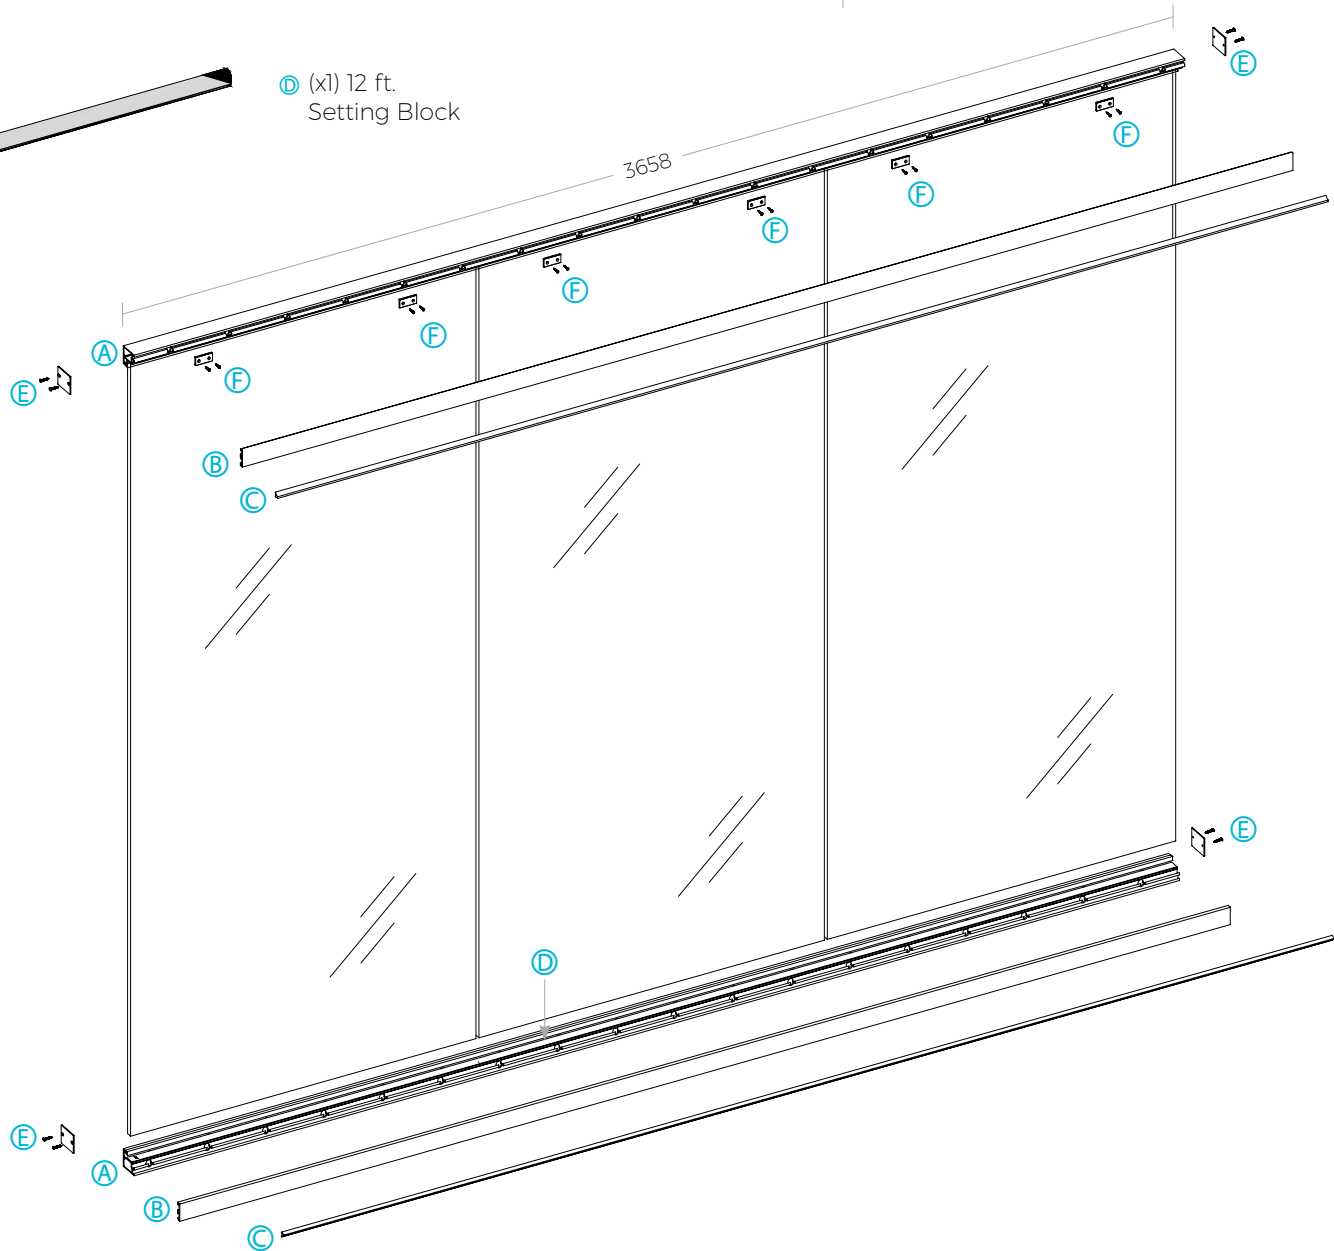

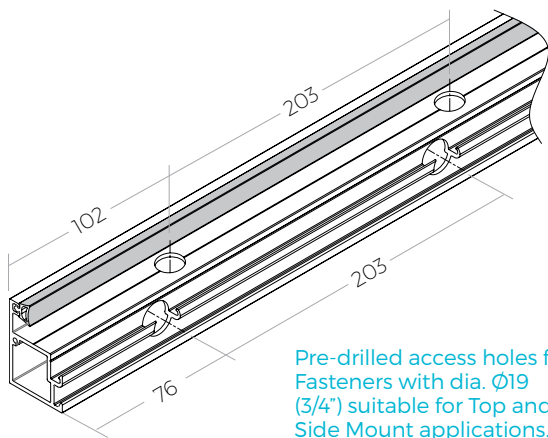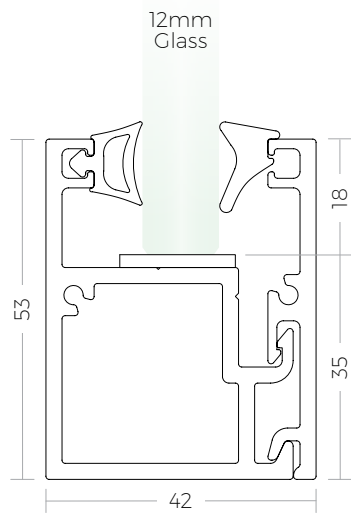

Pre-drilled access holes for Fasteners with dia. $\varnothing 19$ (3/4") suitable for Top and Side Mount applications.

Top Mount

Side Mount



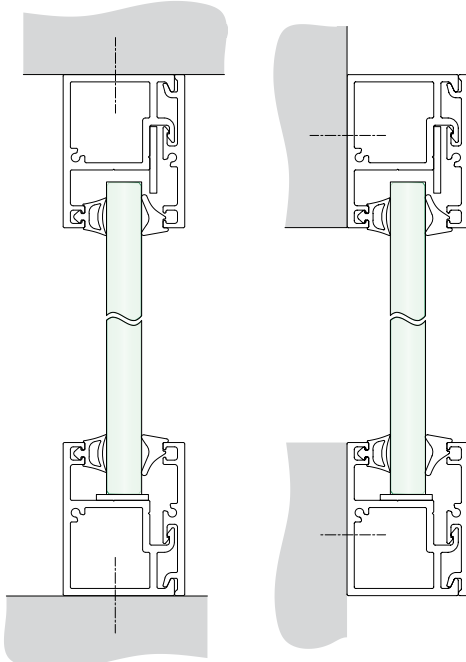




PHOTO: Custom Glass Railings

Glass Channels




Shown in
Brushed Clear
Anodized Aluminum (A).




1 1/16" x 3/4"

PART #	Finish
SSGWCH5834	A, B, BN, CP

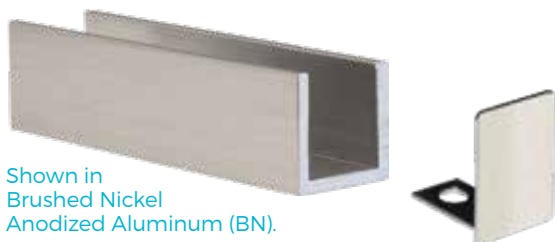

Shown in
Brushed Nickel
Anodized Aluminum (BN).




1" x 1"


PART #	Finish
SSGWCH11	A, B, BN, CP

Available End Cap

PART #	Finish
SSGWCH11E	A, B, BN, CP

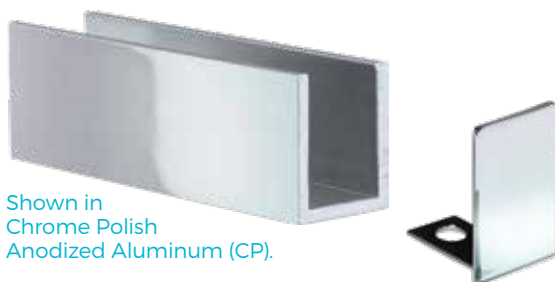

Shown in
Chrome Polish
Anodized Aluminum (CP).



1" x 1 1/2"


PART #	Finish
SSGWCH112	A, B, BN, CP

Available End Cap

PART #	Finish
SSGWCH112E	A, B, BN, CP



Shown in
Brushed Black
Anodized Aluminum (B).



1" x 2"


PART #	Finish
SSGWCH12	A, B, BN, CP

Available End Cap

PART #	Finish
SSGWCH12E	A, B, BN, CP




Shown in
Brushed Clear
Anodized Aluminum (A).



Aluminum Flat Bar 1/8" x 3/4" X 144"

PART #	Finish
SSGWFL34	A, B

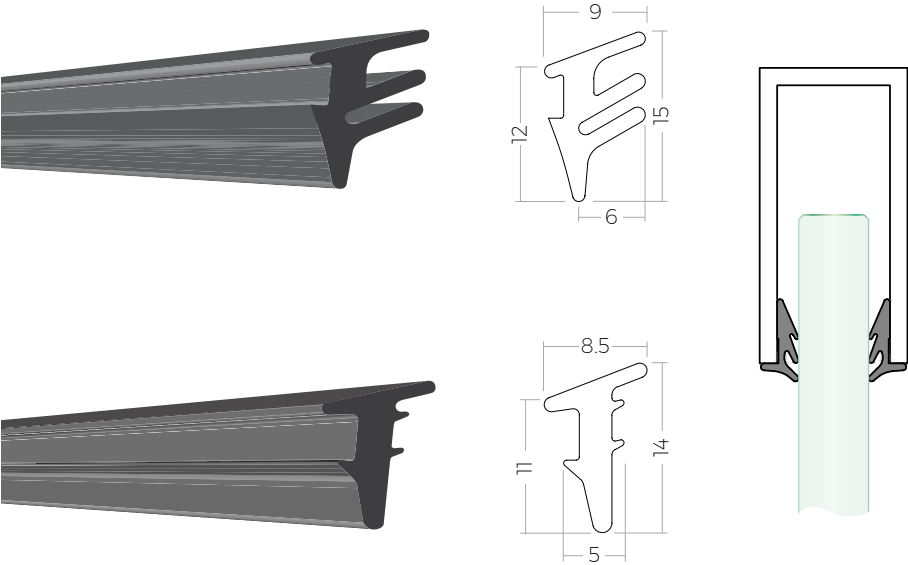

Glazing Rubber Gaskets


Use with **SSGWCH** Channels (pg 191).

PART #	Class Size	Roll Size
SSGWCHSEAL1	10	100'
SSGWCHSEAL2	12	100'



Spline to Install Gaskets

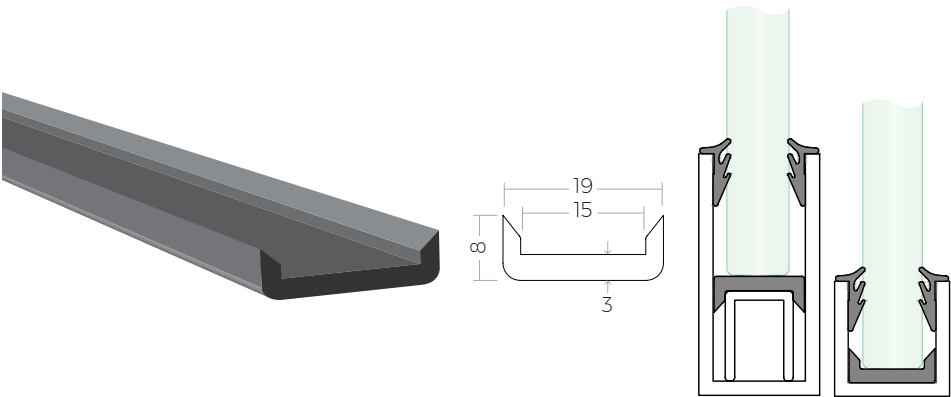PART #
SSGWSPLINE




Rubber Setting Blocks

Use with **SSGWCH** Channels (pg 191).

PART #	Length	Package
SSGWCHSEAL3	100	10 pcs

For further information on our Glass Channels please ask for our Shower Hardware Collection Catalogue or scan the code to visit our Website.



Sliding Glass Door Kits





Our Sliding Glass Door Kits are Single Sliders that combine a sleek and simple look with easy functionality. Perfect for use in smaller spaces to avoid swinging doors and bulky Hinges, and can be mounted to a Wall or Glass. The SS316 Stainless Steel hardware is finished in Clear Satin, and SS304 Stainless Steel is finished in Powder Coated Satin Black.

Our Kits feature an extra security advantage where the Ball Bearing Rollers are equipped with Anti-lift mechanisms to prevent the door from lifting off of the Track. With the 6 Glass Mount Clamps securely fastened to the Glass Wall, the door remains stable during handling. The addition of 2 Floor Mount Door Stops, together with the left and right Track Stops ensure no recoil if the door is moved suddenly.



Single Sliding Glass Door Kit Wall Mount

SSDS110 - Satin Stainless Steel (SS316).

SSDS111 - Powder Coated Satin Black (SS304).

- Suitable for **10-12mm** (3/8"-1/2") Glass.
- Track is 1" (25mm) dia. and 104" (2650mm) long.
- Maximum Door weight: 220 lbs (100kg).

Kit Includes: 1 Top Track, 6 Wall Mount clamps, 2 Sliding Door Rollers, 2 Top Track/Door Stops (left and right side), 2 Floor Mount Door Stops, 1 Floor Guide, Allen Key, Wrench, Fasteners.





Single Sliding Glass Door Kit Glass Mount

SSDS112 - Satin Stainless Steel (SS316).

SSDS113 - Powder Coated Satin Black (SS304).

- Suitable for **10-12mm** (3/8"-1/2") Glass.
- Track is 1" (25mm) dia. and 104" (2650mm) long.
- Maximum Door weight: 220 lbs (100kg).

Kit Includes: 1 Top Track, 6 Glass Mount Clamps (including Surface and Flush Mount Fittings), 2 Top Track/Door Stops (left and right side), 2 Floor Mount Door Stops, 1 Floor Guide, Allen Key, Wrench, Fasteners.



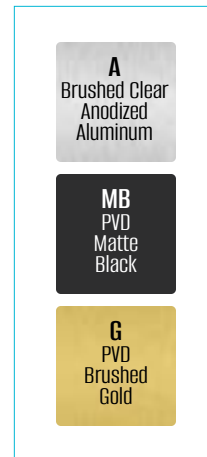
Wine Cellar Collection



Wine Pegs

Our Wall-Mounted Wine Pegs offer a refined and functional Wine Storage System to professional trades, architects, Interior designers, and handy homeowners. They hold 750mL standard bottles and add a modern touch and high-quality finish to your Wine Cellar or Wall with our precision-made, patented systems.

Choose from the Pieno, Leggero, or Vitigno 1-2-3 based on your design and layout preference – robust or minimalist look with bottles held in place either perpendicular or parallel to the Wall. Available in 3 finishes: Brushed Clear Anodized Aluminum, PVD Matte Black, and PVD Brushed Gold.



Features

- Solid Anodized Aluminum material.
- 5 models available in 3 finishes. Each box of Pegs allows you to store 4-6 bottles, depending on the model.
- Nitrile or Silicone Rubber O-rings are pre-installed on the Pegs, providing non-slip stability and considerably reducing installation time.
- Screws are included along with Spring Lock Washers to help maintain the Pegs stay tightly in place. No visible hardware.
- Fully customizable configurations and easy to install Pegs according to our recommended layout or create your own.
- Freedom to design a complete Wine Cellar or a simple Wall Panel to hang in your kitchen to your exact specifications.

Wine Pegs require a Wall Panel for secure installation. The Panel thickness and design will determine the type of hardware required. (Hardware sold separately). Configurations & Installation Instructions are available on our Website: euroeac.com



Wine Pegs



Pieno

Pegs are installed perpendicular to the wall with the cork facing outwards.

Dimensions = $\varnothing 1" \times 7 \frac{1}{16}"$ L

Each box includes 6 Pegs.

There is 1 JCB-B Bolt and
1 Spring Lock Washer per Peg.

Stores 5 bottles in one row, or 4 bottles in
two rows. (2 bottles are held on 3 Pegs).

Nitrile Rubber O-rings are
pre-installed on the Pegs.



Leggero

Dimensions = $\varnothing \frac{1}{2}" \times 7 \frac{1}{16}"$ L
Each box includes 6 pairs of Pegs.

There is 1 JCB-B Bolt and
1 Spring Lock Washer per Peg.

Stores 6 bottles,
1 per pair.

Nitrile Rubber O-rings are
pre-installed on the Pegs.



WC500010A
Brushed Clear



WC500900B
PVD Matte Black



WC500165C
PVD Brushed Gold



WC400010A
Brushed Clear



WC400900B
PVD Matte Black



WC400165C
PVD Brushed Gold



All our pegs are designed to support the bottle by the neck and bottom with the bottle parallel to the wall.

Vitigno 1

Dimensions = $\varnothing 3/4"$ x 3 3/8"L

Each box includes 6 pairs of Pegs.

There is 1 JCB-B Bolt and
1 Spring Lock Washer per Peg.

Stores 6 bottles,
1 per pair.

Silicone Rubber O-rings are
pre-installed on the Pegs.

Vitigno 2

Dimensions = $\varnothing 3/4"$ x 7 1/16"L

Each box includes 3 pairs of Pegs.

There is 1 JCB-B Bolt and
1 Spring Lock Washer per Peg.

Stores 6 bottles,
2 per pair.

Silicone Rubber O-rings are
pre-installed on the Pegs.

Vitigno 3

Dimensions = $\varnothing 3/4"$ x 11 13/16"L

Each box includes 2 pairs of Pegs.

There is 1 JCB-B Bolt and
1 Spring Lock Washer per Peg.

Stores 6 bottles,
3 per pair.

Silicone Rubber O-rings are
pre-installed on the Pegs.



WC601010A
Brushed Clear



WC602010A
Brushed Clear



WC603010A
Brushed Clear



WC601900B
PVD Matte Black



WC602900B
PVD Matte Black



WC603900B
PVD Matte Black



WC601165G
PVD Brushed
Gold



WC602165G
PVD Brushed
Gold



WC603165G
PVD Brushed
Gold

Accessories by Special Order Only

Wood Racks

Our classic Wood Racks come in a variety of sizes to suit your Wine Cellar needs. Racks are in Torrefied Trembling Aspen finish. Wall Support included. Safe for long-term storage of bottles. Easy to assemble; no cutting required.

CLASSIC STANDARD RACKS store 750mL standard bottles. The space to place the bottle in the rack is 3 1/2"W x 2 7/8"H.

CLASSIC DIAMOND RACK bottle capacity refers to 750mL standard bottles. Bottle capacity may differ when storing different sizes of bottles.



WCCIS124551
Standard
12 bottles
5"W x 45"H x 9"D



WCCID323051
Standard
32 bottles
17 1/2"W x 30"H x 9"D



WCCID484551
Standard
48 bottles
17 1/2"W x 45"H x 9"D



WCCID643051
Standard
64 bottles
35"W x 30"H x 9"D



WCCID964551
Standard
96 bottles
35"W x 45"H x 9"D



WCDIA363051
Diamond
36 bottles
17 1/2"W x 30"H x 9"D

Under Cabinet Stemware Holders

SPECIAL ORDER



Our Under Cabinet Stemware Holders are made of Steel and are available in several sizes in various finishes. All Stemware Holders are accompanied by Mounting Hardware along with a back bracket to use for face frame cabinet applications. Stemware Holders help you organize your collection of Stemware and match your Kitchen/Bar. Ideal storage solution for several types of wine glasses, making them easy to reach.

All openings of the Holders are 3 1/2" wide x 3/4" high and accommodates Glass bases less than 15/16" wide.



11" Holder

4 1/4"W x 1 1/2"H x 11"D
Holds 2-3 Wine Glasses

WC315011BR - BR
WC315011CP - CP
WC315011ORB - ORB
WC315011SN - SN



16" Holder

4 1/4"W x 1 1/2"H x 16"D
Holds 4 Wine Glasses

WC315016BR - BR
WC315016CP - CP
WC315016ORB - ORB
WC315016SN - SN



18" Holder

4 1/4"W x 1 1/2"H x 18"D
Holds 5 Wine Glasses

WC315018CP - CP
WC315018ORB - ORB
WC315018SN - SN



Quad Holder

4 Holders attached together
4 1/4"W x 1 1/2"H x 11"D
Holds 8-12 Wine Glasses

WC345011CP - CP
WC345011ORB - ORB
WC345011SN - SN

Z-Shaped Moulding

Solid Aluminum Z-shaped Moulding in Mill finish. Ideal for Cabinets, Panels, and Furniture for Showrooms and Trade Shows. For Fasteners on Wood substrates, use #14 Pan Head Wood Screws between 2 1/2" to 4" in length. For other substrates, contact us to inquire.

Width = 1/4" • Height = 1 3/8" • Thickness = 1/8" • Lift-off = 3/8"

WC318708D10 8' Length
WC318712D10 12' Length



Wine Cellar Collection

Fasteners, Drill Bits & Taps


Screws & Rods

All Products are Stainless Steel unless specified as (Zinc).
















Scan to
view all
fasteners








Self-Tapping Screws

PART #	Description	Uses
 SSPH12X34PK	#12 x 3/4" Flat Head	Handrail Attachment Plates into Metal Handrail. (50 pcs).
SSPH620X38	6-20 x 3/8" Pan Head	SSL2LED4 Mounting Clips. (50 pcs).


Machine Screws

PART #	Description	Uses
 SSM4	M4 x 10mm Flat Head	Cover of Edge Mount Spigots.
 SSM612BX	M6 x 12mm Flat Head	Handrail Attachment Plates into Tube Supports & Handrail Brackets; Rod Holders into Post. (100/box).
 SSM616BX	M6 x 16mm Flat Head	Side Screws for Glass Clips. (100/box).
 SSM620BX	M6 x 20mm Flat Head	Handrail Attachment Plates into Tube Supports & Handrail Brackets; Rod Holders into Post.
 SSM625	M6 x 25mm Flat Head	Handrail Attachment Plates into Tube Supports & Handrail Brackets; Rod Holders into Post.
 SSM812	M8 x 12mm Flat Head	Back Plate of Wall Bracket to Elbow.
 SSM816	M8 x 16mm Flat Head	Back Plate of Wall Bracket to Elbow.
 SSM820	M8 x 20mm Socket Head	Glass Clips into Post.
 SSSPIGOTBOLT	M12 x 178mm	For use as Thru-Bolt for all installation applications.
 SSFLPK1	3/8" X 1 1/4" Button Head	Machine Screw for SSJ112114
 SSFLPK12	3/8" x 2" Button Head	Machine Screw for SSJ112114 .
 SSFLPK2	3/8" X 1 1/4" Hex Head	Wood Fastener for SSJ112112 .
 SSFLPK22	3/8" x 2" Hex Head	Machine Screw for SSJ112112 .
 SSFLPK3	3/8" x 1 1/4" Socket Head	Machine Fastener for SSJ1122 or SSJQ112 .
 SSFLPK32	3/8" x 2" Socket Head	Machine Fastener for SSJ1122 or SSJQ112

Wood Screws

PART #	Description	Uses
 SSFL8X1	#8 x 1"	Handrail Attachment Plates into Wood Handrail.
 FKAS1234VP	#12 x 3/4"	Handrail Attachment Plates into Wood Handrail. (50pcs/pk).
 FKAS122VP	#12 x 2"	Wall Brackets into Wall (Wood).
 19AF14AX2	#14 x 2"	Wall Brackets into Wall (Wood).
 FTC17GO5164L	5/16" x 4"	Elite H1 post on wood.
 FTC17GO5165L	5/16" x 5"	Elite H1 post on wood.
 FTC17GO38412L	3/8" x 4 1/2"	Standard 6" & 8" Spigots and Elite H2 & F1 Posts on wood.

Wood Screw Inserts



PART #	Description	Uses
SSKFW382	3/8" x 2"	Standard Standoffs (SSK 1 1/2" and 2" dia.) into Wood.
SSKFW38234	3/8" x 2 3/4"	Adjustable Standoffs (SSJ 1 1/2" dia.) into Wood (with Drywall).
SSKFW38112	3/8" x 1 1/2"	Standoffs in stringer application.

Reducer Screws



PART #	Description	Uses
SSFPM6TOM8	M6 to M8	Connecting M6 hole to M8 hole for Rod Systems.
SSFPM8TOM10	M8 to M10	Connecting M8 hole to M10 hole for Rod Systems.

Threaded Rods

PART #	Description	Uses
--------	-------------	------

Metric




SSM505	M5 x 5mm	Stainless Steel Collars Set Screw replacement.
---------------	----------	--



SSM850SET	M8 x 50mm	Off-the-Glass Handrail Brackets.
SSM8100SET	M8 x 100mm	Off-the-Glass Handrail Brackets.



SSM1060SET	M10 x 60mm	
SSM1080SET	M10 x 80mm	
SSM10100SET	M10 x 100mm	



SSM8ROD	M8 x 1m (Zinc)	
SSM10ROD	M10 x 1m (Zinc)	
SSM12ROD	M12 x 1m (Zinc)	

Imperial



SSKF5161	5/16"-18 x 4"	Standard Standoffs (SSK 1 1/4" dia.) with Epoxy into concrete.
-----------------	---------------	--



SSKF384	3/8"-16 x 1 1/8"	Standard Standoffs Caps (SSK 1 1/2" & 2" dia.).
SSKF383	3/8"-16 x 1 9/16"	Standard Standoffs (SSK 1 1/2" & 2" dia.).
SSKF382	3/8"-16 x 3 1/2"	Standard Standoffs (SSK 1 1/2" & 2" dia.), Adjustable Standoffs (SSJ 1 1/2" dia.).



SSKF381	3/8"-16 x 5"	Standard Standoffs (SSK 1 1/2" & 2" dia.), Adjustable Standoffs (SSJ 1 1/2" dia.).
----------------	--------------	---

SSKF121	1/2"-13 x 5"	Adjustable Standoffs (SSJ 2" dia.), Base Shoes, Top/Side/Edge Mount Adjustable Spigots, Heavy Duty Posts with Epoxy into concrete.
----------------	--------------	--

Anchoring



PART #	Description	Uses
FR5-10MX	10 oz.	FLO-ROK® FR5 MAX Injection Anchoring Adhesive/Epoxy.
PA100		FLO-ROK® FR5 MAX 10 oz. Manual Dispensing Tool.
ROCKITE	50 lbs Pail	Anchoring & Patching Cement (Gypsum-Based).


Hanger Bolts Imperial

PART #	Description	Uses
 HB12312	1/2" x 3 1/2" (Zinc)	Adjustable Standoffs (SSJ 2" dia.), Side Mount Spigots into Wood.
HB124SS	1/2" x 4"	Adjustable Standoffs (SSJ 2" dia.), Side Mount Spigots into Wood.
HB125	1/2" x 5" (Zinc)	Adjustable Standoffs (SSJ 2" dia.), Side Mount Spigots into Wood.
HB125SS	1/2" x 5"	Adjustable Standoffs (SSJ 2" dia.), Side Mount Spigots into Wood.
 SSKFHB5161	5/16" x 3"	Standard Standoffs (SSK 1 1/4" dia.) Into Wood.
 SSKFHB38212	3/8" x 2 1/2"	Standard Standoffs (SSK 1 1/2" & 2" dia. in 1 1/2", 1 3/4" & 2" lengths) into Wood.
 SSKFHB38314	3/8" x 3 1/4"	Standard Standoffs (SSK 1 1/2" & 2" dia. in 1 1/2", 1 3/4" & 2" lengths) into Wood.
 HZ38212VP	3/8" x 2 1/2" (Zinc) 50/Box	Standard Standoffs (SSK 1 1/2" & 2" dia. in 1 1/2", 1 3/4" & 2" lengths) into Wood.
SSKFHBI3835	3/8" x 3 1/2"	Standard Standoffs (SSK 1 1/2" & 2" dia. in 1 1/2", 1 3/4" & 2" lengths) into Wood.
HZ38312VP	3/8" x 3 1/2" (Zinc) 50/Box	Standard Standoffs (SSK 1 1/2" & 2" dia. in 1 1/2", 1 3/4" & 2" lengths) into Wood.
SSKFHBI384	3/8" x 4"	Standard Standoffs (SSK 1 1/2" & 2" dia. in 1 1/2", 1 3/4" & 2" lengths) into Wood.
HZ383VP	3/8" x 3" (Zinc) 50/Box	Standard Standoffs (SSK 1 1/2" & 2" dia. in 1 1/2", 1 3/4" & 2" lengths) into Wood.
HZ384VP	3/8" x 4" (Zinc) 50/Box	Standard Standoffs (SSK 1 1/2" & 2" dia. in 1 1/2", 1 3/4" & 2" lengths) into Wood.
 SSKFHB384	3/8" x 4"	Standard Standoffs (SSK 1 1/2" dia. in 1/2" & 2" lengths & 2" dia. in 3/4" & 2" lengths) into Wood.
 SSJHB124SS	1/2" x 4"	Adjustable Standoffs (SSJ 2" dia.) into Wood.
 HBD38	3/8"	Hanger Bolt Driver for 3/8" Hanger Bolts.
 HBD12	1/2"	Hanger Bolt Driver for 1/2" Hanger Bolts.
 HBDS34	3/4"	Hex Socket Wrench for 1/2" Bolts.





Hanger Bolts Metric

PART #	Description	Uses
 HBM850	M8 x 50mm	
HBM880	M8 x 80mm	Wall Brackets into Wood.
HBM8100	M8 x 100mm	Wall Brackets into Wood.
 HBM1050	M10 x 50mm	
HBM1080	M10 x 80mm	Wall Brackets into Wood.
HBM10100	M10 x 100mm	Wall Brackets into Wood.
HBM12120	M12 x 120mm	Adjustable Standoffs (SSJ 2" dia.) into Wood.


Torpedo Bolts (Zinc)

PART #	Description	Uses
 UTB14214BX	1/4" x 2 1/4" (100/box)	
UTB143BX	1/4" x 3" (100/box)	
UTB38212	3/8" x 2 1/2" (50/box)	
UTB384	3/8" x 4" (50/box)	Posts, Standard Spigots 6" & 8", and SSJ112 into concrete.

Lag Bolts

	PART #	Description	Uses
	LAG383	3/8" x 3" (Zinc)	Posts and Standard Spigots 6" & 8" into Wood.
	LAG383SS	3/8" x 3"	Posts and Standard Spigots 6" & 8" into Wood.
	LAG384	3/8" x 4" (Zinc)	Posts and Standard Spigots 6" & 8" into Wood.
	HLZ384L	3/8" x 4" (50/box) (Zinc)	Posts and Standard Spigots 6" & 8" into Wood.
	LAG384SS	3/8" x 4"	Posts and Standard Spigots 6" & 8" into Wood.
	HLS384CT	3/8" x 4" (25/box)	Posts and Standard Spigots 6" & 8" into Wood.
	LAG385	3/8" x 5" (Zinc)	Posts and Standard Spigots 6" & 8" into Wood.
	HLZ385L	3/8" x 5" (50/box) (Zinc)	Posts and Standard Spigots 6" & 8" into Wood.
	LAG385SS	3/8" x 5"	Posts and Standard Spigots 6" & 8" into Wood.
	HLS385CT	3/8" x 5" (20/box)	Posts and Standard Spigots 6" & 8" into Wood.
	HLS385-BX	3/8" x 5" (200/box)	Posts and Standard Spigots 6" & 8" into Wood.
	LAG123SS	1/2" x 3"	Edge Mount Spigots & Side Mount Base Shoe into Wood.
	LAG124SS	1/2" x 4"	Edge Mount Spigots & Side Mount Base Shoe into Wood.
	LAG125	1/2" x 5" (Zinc)	Top Mount Adjustable Spigots, Top Mount Base Shoe into Wood.
	LAG125SS	1/2" x 5"	Top Mount Adjustable Spigots, Top Mount Base Shoe into Wood.

Wedge Anchors

	PART #	Description	Uses
	ISS12234	1/2" x 2 3/4"	Adjustable Standoffs (SSJ 2" dia.) into concrete.
	ISS12334	1/2" x 3 3/4"	
	ISS12412	1/2" x 4 1/2"	
	ISS12512	1/2" x 5 1/2"	Adjustable Standoffs (SSJ 2" dia.), Base Shoes, Top/Side/Edge Mount Adjustable Spigots into concrete.
	ISS34512	3/4" x 5 1/2"	Posts, Standard Spigots 6" & 8", & SSJ112 into concrete.
	ISS38214	3/8" x 2 1/4"	
	ISS38234	3/8" x 2 3/4"	
	ISS383	3/8" x 3"	Posts, Standard Spigots 6" & 8", & SSJ112 into concrete.
	ISS38334	3/8" x 3 3/4"	
	ISS385	3/8" x 5"	
	WED12234-BX	1/2" x 2 3/4" (50/box) (Zinc)	Adjustable Standoffs (SSJ 2" dia.) into concrete.
	WED12334-BX	1/2" x 3 3/4" (50/box) (Zinc)	
	WED12412-BX	1/2" x 4 1/2" (50/box) (Zinc)	
	WED12512-BX	1/2" x 5 1/2" (50/box) (Zinc)	Adjustable Standoffs (SSJ 2" dia.), Base Shoes, Heavy Duty Post, Top/Side/Edge Mount Adjustable Spigots into concrete.
	WED34512-BX	3/4" x 5 1/2" (20/box) (Zinc)	Posts, Standard Spigots 6" & 8", & SSJ112 into concrete.
	WED38214-BX	3/8" x 2 1/4" (50/box) (Zinc)	
	WED38234-BX	3/8" x 2 3/4" (50/box) (Zinc)	
	WED383-BX	3/8" x 3" (50/box) (Zinc)	Posts, Standard Spigots 6" & 8", & SSJ112 into concrete.
	WED38334-BX	3/8" x 3 3/4" (50/box) (Zinc)	
	WED385-BX	3/8" x 5" (100/box) (Zinc)	

Sleeve Anchors (Zinc)



PART #	Description	Uses
SLE12214-BX	1/2" x 2 1/4" (25/box)	
SLE123-BX	1/2" x 3" (25/box)	
SLE124-BX	1/2" x 4" (25/box)	Adjustable Standoffs (SSJ 2" dia.) into concrete.
SLE34414-BX	3/4" x 4 1/4" (10/box)	
SLE34614-BX	3/4" x 6 1/4" (10/box)	
SLE383-BX	3/8" x 3" (50/box)	Posts, Standard Spigots 6" & 8", & SSJ112 into concrete.
SLE384-BX	3/8" x 4" (50/box)	Posts, Standard Spigots 6" & 8", & SSJ112 into concrete.

Washers & Nuts

PART #	Description	Uses
--------	-------------	------

Washers



PWZ516VP	5/16" Flat (100/box) (Zinc)
PWS516VP	5/16" Flat (100/box)
PWZ14VP	1/4" Flat (100/box) (Zinc)
PWS14VP	1/4" Flat (100/box)
PWZ39VP	3/8" Flat (75/box) (Zinc)
PWS38VP	3/8" Flat (100/box)
PWZ12CT	1/2" Flat (75/box) (Zinc)
PWS12CT	1/2" Flat (100/box)

Nuts



SSNUT3816	3/8"-16 Hex Nut (50/box)
SSNUT1213	1/2"-13 Hex Nut (50/box)




SSRIVETM6	M6 Rivet Nut (50/box)	Polaris Hinges (Series 125) & hydraulic Hinges into Posts.
SSRIVETM8	M8 Rivet Nut (50/box)	Glass Clips & off-the-Post Handrail Brackets into Posts.
SSRIVET38	3/8"-16 Rivet Nut (50/box)	Double Arm Glass Connector, Straight Arm Spider, and Glass Clip into Blank Heavy Duty Posts.

Tools



PART #	Description	Uses
SSRIVET	Hand Rivet Nut Gun	Inserting Rivet Nut into Posts.



SSRIVETCM6	M6 Rivet Nut Collet (Metric)	Inserting Rivet Nut into Posts.
SSRIVETCM8	M8 Rivet Nut Collet (Metric)	Inserting Rivet Nut into Posts.
SSRIVETC38	3/8" Rivet Nut Collet (Imperial)	Inserting Rivet Nut into Posts.



Stub Drill - Drill Press

PART #	Description	Uses
134-648	1 1/64"	For SSPH12X34 Stainless Steel / Steel.
134-656	5.0mm M6 x 1	Stainless Steel / Steel.
134-679	6.8mm M8 x 1.25	Stainless Steel / Steel.
134-416	8.5mm M10 x 1.5	Stainless Steel / Steel.
134-700	8.5mm M10 x 1.5	Stainless Steel / Steel.
128346	#7 0.2010	(Use with TAP1/4-20-3) Steel.



Jobber Drill - Hand Tool

PART #	Description	Uses
133-993	#7 for 1/4-20 Tap	(Also for Drill Press) Stainless Steel / Steel.
134-502	13/64" for 1/4" Tap	Stainless Steel / Steel.
134-517	1/4"	Stainless Steel / Steel.

Jobber Drill - Drill Press

PART #	Description	Uses
128136	#7 0.2010	(Use with TAP1/4-20-3) Steel.
144-110	6.8mm for M8	Steel.
118-011	7/32" HSS & Cobalt general purpose Drill Bit	(Use with TAP1/4-20-3) Steel.




Taps - Drill Press

PART #	Description	Uses
123-116	Hand Tap 1/4 - 20	Stainless Steel / Steel.
123-498	Hand Tap 4 Flute M6 x 1	Stainless Steel / Steel.
123-499	Hand Tap 4 Flute M8 x 1.25	Stainless Steel / Steel.
123-500	Hand Tap 4 Flute M10 x 1.25	Stainless Steel / Steel.
124-675	Hss Roll Form Tap 1/4 - 20	Stainless Steel / Steel.
124-765	Hss Roll Form Tap M6 x 1	Stainless Steel / Steel.
124-770	Hss Roll Form Tap M8 x 1.25	Stainless Steel / Steel.
TAP1/4-20-3	Hsse-V3 Spiral Flute Tap 1/4 20 x 3	Steel.

Metal Machinery / Tools & Accessories






Saws



Grinding Tools



Polishing Tools



Flow Drill









Femi NG120XL Professional Benchtop Mitring Bandsaw

Part # 69908030047

"NG" SYSTEM: Opposite Blade Rotation Direction provides a more efficient & cleaner cut than traditional blade cutting systems. Up to **60% faster** cutting using this patented reverse cutting technology.

NG120XL Technical Data

 WATT	 mm	 Z/h°	 m/min	 a x b x h (mm)	 Kg
1300 [1~]	1440 x 13 x 0.65	14*	35 ÷ 80	900 x 400 x 520	18

*Standard bimetal cobalt blade [1~] 110 Volt - Hz 50 single-phase motor



BB4825121014
Bandsaw Blades
available. Contact us
to inquire.



Scan QR code to see
our demo video.

NG120XL Cutting Capacity

			
@ 0°	120 x 102 mm	120mm	112 x 112mm
@ 45°	78 x 78 mm	80mm	78 x 78mm
@ 60°	50 x 43 mm	50mm	48 x 48mm



G4510WA-2 EAC 4" Portable Bandsaw

Part # G4510WA-2

G4510WA-2 Technical Data

 WATT	 mm	 Z/h°	 m/min	 a x b x h (mm)	 Kg
370	1440 x 13 x 0.65	14*	45@50HZ 54@60HZ	730 x 360 x 450	27

*Standard bimetal cobalt blade [1~] 110 Volt - Hz 50 single-phase motor



BB4978121014
Bandsaw Blades
available. Contact us
to inquire.



Scan QR code to see
our demo video.

G4510WA-2 Cutting Capacity

		
@ 90°	100 x 150 mm	100mm
@ 45°	60 x 100 mm	60mm



Special Order Only

7 1/4" Metal Cutting Saw

Includes: Case, Wrench, 7 1/4" Mild Steel Blade, Guide, Internal Laser Guide, Safety Protection.

PART #	Motor HP	Input Power	Max RPM	Max Depth Of Cut
69908120000	1.9	12A(1,400W)	3,800	2 3/8" (60mm)

7 1/4" Saw Blades

PART #	Used For	Capacity
63502007200	Mild Steel	5/16" (8mm)
63502007210	Aluminum	3/8" (9.5mm)
63502007220	Stainless Steel	1/4" (6mm)
69908120450	Thin Steel	1/4" (6mm)



Special Order Only

9" Metal Cutting Saw

Includes: Case, Wrench, 9" Mild Steel Blade, Guide, Internal Laser Guide, Safety Protection.

PART #	Motor HP	Input Power	Max RPM	Max Depth Of Cut
69908120001	2.4	15A(1,400W)	2,300	3 1/8" (80mm)

9" Saw Blades

PART #	Used For	Capacity
63502009540	Mild Steel	1/2" (12.7mm)
63502009550	Aluminum	5/8" (15.9mm)
63502009560	Stainless Steel	5/16" (8mm)
69908120448	Thin Steel	1/4" (6mm)



Special Order Only

14" Metal Cutting Saw

Features: Unique Auto-retracting Blade Guard, Quick release vise, & Ability to Bevel up to 45 degrees.

Includes: Case, Wrench, 14" Mild Steel Blade, Guide, Internal Laser Guide, Safety Protection.

PART #	Motor HP	Input Power	Max RPM	Max Depth Of Cut
72905361120	3.0	15A (1,800 W)	1,300	5 1/8" (130mm) Round 4 3/4" (120mm) Square

14" Saw Blades

PART #	Used For	Capacity
63502014600	Mild Steel	1/2" (12.7mm)
63502014610	Aluminum	5/8" (15.9mm)
63502014620	Stainless Steel	5/16" (8mm)
63502014630	Thin Steel	1/4" (6mm)



BOSCH

Invented for life



Bosch 1375A Electric Grinder

Wheel Diameter: 4 1/2"

Amps: 6

RPM: 11,000



Fein WSG11-125 Electric Grinder

Wheel Diameter: 5"

Watts: 11,000

RPM: 11,000



Einhell



Einhell 4431122 Cordless Grinder

Wheel Diameter: 4 1/2"

RPM: 8,500

2.5 Ah Battery recommended.
Batteries sold separately.



Einhell 4512131 2.5 Ah Battery & Charger Kit



Cut Off Wheel Zip Cut (25Pcs/Pack)

PART #	Dimensions	Peripheral Speed (m/s)	Max RPM (l/min)
SS412116	4 1/2" x 1/16" x 7/8"	80	13,300
SS412132U	4 1/2" x 1/32" x 7/8"	80	13,300
SS5116	5" x 1/16" x 7/8"	80	12,250
SS5132U	5" x 1/32" x 7/8"	80	12,250
SS6116	6" x 1/16" x 7/8"	80	10,200
SS7116	7" x 1/16" x 7/8"	80	8,500



Cut Off Wheel Zip Cut Depressed (25Pcs/Pack)

PART #	Dimensions	Peripheral Speed (m/s)	Max RPM (l/min)
SS412116DP	4 1/2" x 1/16" x 7/8"	80	13,300
SS5116DP	5" x 1/16" x 7/8"	80	12,250
SS7116DP	7" x 1/16" x 7/8"	80	8,500



Fine Finishing Disc

PART #	Dimensions	Peripheral Speed (m/s)	Max RPM (l/min)
POL412F	4 1/2" x 7/8"	80	13,300
POL512F	5" x 7/8"	80	12,200



Medium Finishing Disc

PART #	Dimensions	Peripheral Speed (m/s)	Max RPM (l/min)
POL412M	4 1/2" x 7/8"	80	13,300
POL512M	5" x 7/8"	80	12,200



Fein Pipe Polisher/Sander Professional Set

RS12-70E

Includes:

- 1 RS12-70E Pipe Polisher/Sander.
- Sanding Belts 20 x 815mm - 120 Grit (x10) + 180 Grit (x10).
- Sanding Belts 40 x 815mm - 120 Grit (x10) + 180 Grit (x10).
- Fleece Belts 20 x 815mm - 280 Grit (x5).
- 1 Carrying Case.

Additional Accessories Sold Separately



Sanding Belts (Sold in packs of 10)

- 69908034025** 20 x 815mm 80 Grit ★
- 63714050015** 20 x 815mm 120 Grit
- 63714051014** 20 x 815mm 180 Grit
- 63714052017** 20 x 815mm 320 Grit
- 63714053011** 20 x 815mm 400 Grit
- 69908034234** 20 x 815mm 600 Grit
- 69908034253** 40 x 815mm 60 Grit
- 69908036109** 40 x 815mm 80 Grit ★
- 63714054019** 40 x 815mm 120 Grit
- 63714055013** 40 x 815mm 180 Grit
- 69908034235** 40 x 815mm 280 Grit ★



Fleece Belts (Sold in packs of 5)

- 63714056016** 40 x 815mm 80 Grit ★
- 63714057010** 40 x 815mm 120 Grit
- 63714058018** 40 x 815mm 280 Grit
- 69908034252** 40 x 815mm Coarse
- 69908036110** 40 x 815mm Medium
- 69908036135** 40 x 815mm Fine



Ceramic Belts (Sold in packs of 10)

- 63714130010** 20 x 815mm 80 Grit ★
- 63714131010** 40 x 815mm 80 Grit



Polishing Belts (Sold in packs of 3)

- 63726010018** 20 x 815mm

★ SPECIAL ORDER ITEMS

For Technical Specifications, visit our Website.



FEIN WP014-25E Metal finisher

69908030010

High performance Metal Finisher for processing of Stainless Steel surfaces.

Features:

- Soft-start.
- Soft-start lock.
- FEIN high-performance motor.
- Spindle lock.
- 1,200 Watts.
- 2,500 Max RPM.
- 9" (230mm) Polishing Disc.



Fein SS Finishing Kit

63721050020

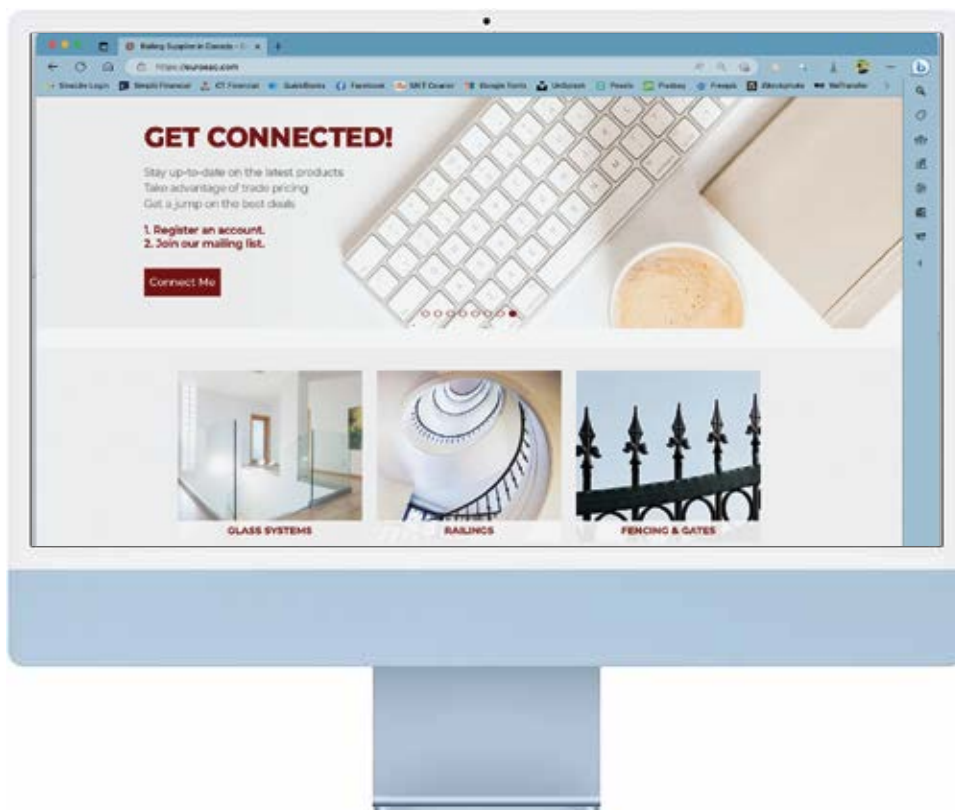
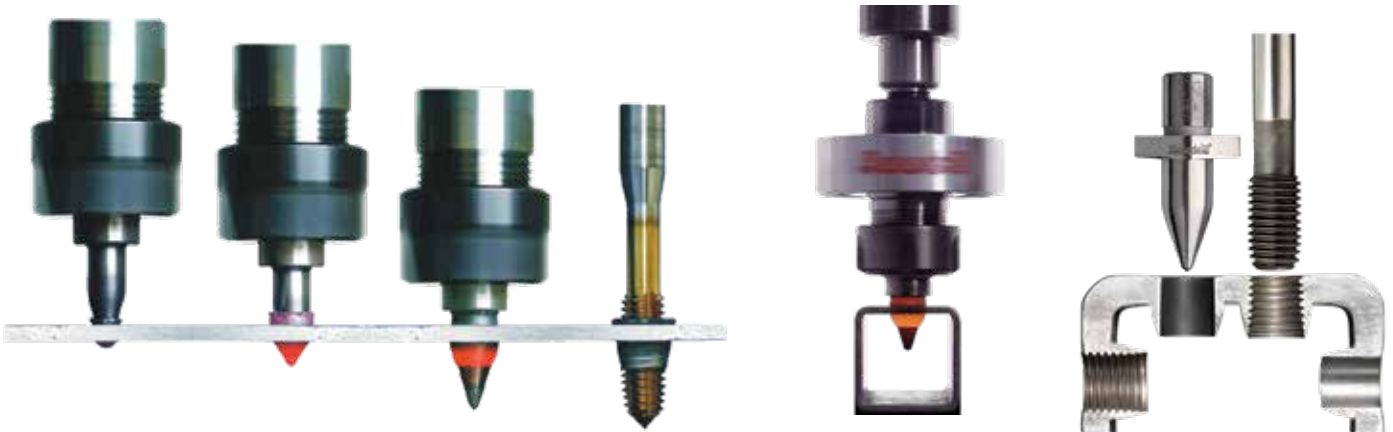
Perfect, blemish-free Satin finishing with extremely low head build-up.

Includes:


- 60 Grit medium gum wheel (1pc).
- 180 Grit fine gum wheel (1pc).
- 180 Grit fine sinus fleece wheel (1pc).



A Flowdrill is a lobed, conical tungsten carbide tool. When rotated at high speed and pressed with high axial force into sheet Metal or thin Walled Tube, generated heat softens the Metal and allows the Drill to feed forward, produce a hole and simultaneously form a Bushing from the displaced material. Contact us for more information.



Please scan the code to see more machinery, tools, and hardware on our Website.



Cleaners, Protectors, & Silicone





**Sprayway
Glass
Cleaner**

GCCLEANER
539g / 16 fl.oz.



**Richelieu
Stainless Steel
Cleaner**

SSCLEANER
425g / 15 fl.oz.



**Weicon
Stainless Steel
Spray Paint**

SSSPRAYPAINT
500mL



**Weicon
2-Part
Adhesive Kit**

SSRK-1500
60g



**Scotch-Brite
Scouring Pads**

3MASB7447B
Sold in packs of 5.



Silicone



General Purpose

G.E. Silicone

GESCS1200
299mL Clear.

GESCS1200W
299mL White.



CS Silicone

SILICONE1
300mL Clear.



Mold &
Mildew
Resistant.

Sanitary

G.E. Silicone

GESCS1700
299mL Clear.



Richelieu Silicone

SILICONE2
300mL Clear.

DEEP CLEAN YOUR GLASS.



Glass Scrub®

Water Spot & Stain Remover

GGCLEANER2 (500 mL / 16 fl. oz.)

Glass SCRUB® removes the toughest Stains, Soap Scum, Rust, and Hard Water Mineral Deposits in Kitchens, Baths, and throughout the home.

Glass SCRUB® deep cleans Sinks, Tubs, Showers, and Counters to a sparkling shine without scratching or dulling the surface. Perfect for Glass, Porcelain, Ceramics, and other hard surfaces such as Granite and Tile.

Used by professionals. The ultimate stain and build-up remover... guaranteed!

Properties

- Active Ingredients: Finely-divided Crystalline Silica, Soap, and Detergent.
- Flash Point: Non-flammable – Water-based.
- Odour: Mild (Wintergreen).
- Colour: White to Off-white.
- pH: 3.0.
- Viscosity: Consistency of Cream.
- Specific Gravity: 1.15.
- Storage Stability: Minimum 2 years.
- Weight per Gallon: 4.34 kg / 9.56 lbs.
- Freeze/Thaw Stability: Good.

PROTECT YOUR GLASS.



Invisible Shield®

Protective Glass & Surface Coating

GGCLEANER3 (500 mL / 16 fl. oz.)

INVISIBLE SHIELD® seals, polishes, and protects Glass Windows, Patio Doors, Shower Doors & Enclosures, Porcelain Sinks & Bathtubs, and Ceramic Tile Walls & Counters.

INVISIBLE SHIELD® protects surfaces with a water, soil, and stain repellent finish that dramatically reduces the adhesion and build-up of Dirt, Grime, Water Spots, Limescale, Rust, Soap Scum, and Hard Water Minerals for easier next-time cleaning.

Long-lasting and resists Soaps, Solvents, and Detergents. Infinitely renewable!

Properties

- Active Ingredient: Dimethyl Polysiloxanes.
- Flash Point: 19°C / 66°F (TAG Open Cup).
- Odour: Mild (Ethyl Alcohol).
- Colour: Clear, colourless liquid.
- Acid Number: About 1.
- Viscosity: Consistency of Alcohol.
- Specific Gravity: 0.802.
- Abrasives: None.
- Storage Stability: Minimum 5 years.
- Weight per Gallon: 3.5 kg / 7.7 lbs.

Index

PART#	PAGE#	PART#	PAGE#	PART#	PAGE#	PART#	PAGE#
128136	208	144-110	208	GGT124172	169	ISS38234	206
128346	208	3MASB7447	224	GGT124624	169	ISS383	206
4431122	213	683RSS58G	162	GGT124628	169	ISS38334	41, 206
4512131	213	683RSS58GB	162	GGT124632	169	ISS385	206
63502007200	212	683RSS58SB	162	GGT124632G1	169	LAG123SS	206
63502007210	212	BB4825121014	211	GGT124632G2	169	LAG124SS	206
63502007220	212	BB4978121014	211	GGT124636	169	LAG125	206
63502009540	212	FKAS1234VP	203	GGT124640	169	LAG125SS	206
63502009550	212	FR5-10MX	39,41,204	GGT124642	169	LAG383	206
63502009560	212	G4510WA-2	211	GGT124644	169	LAG383SS	206
63502014600	212	GESCSI200	224	GGT124646	169	LAG384	206
63502014610	212	GESCSI200W	224	GGT124648	169	LAG384SS	206
63502014620	212	GESCSI700	224	GGT124648G1	169	LAG385	206
63502014630	212	GGCLEANER	170, 224	GGT124648G2	169	LAG385SS	206
63714050015	215	GGCLEANER2	170, 225	GGT124650	169	MLSPS2L	177,178
63714051014	215	GGCLEANER3	170, 226	GGT124652	169	PA100	46, 204
63714052017	215	GGCS5324896	169	GGT124654	169	POL412F	214
63714053011	215	GGT123530	169	GGT124654G2	169	POL412M	214
63714054019	215	GGT123532	169	GGT124656	169	POL512F	214
63714055013	215	GGT123534	169	GGT124658	169	POL512M	214
63714056016	215	GGT123536	169	GGT124660	169	PSMC112SSSG	161
63714057010	215	GGT123538	169	GGT124660G2	169	PSMC112SSSGB	161
63714058018	215	GGT123540	169	GGT124662	169	PSMC112SSSSB	161
63714130010	215	GGT123542	169	GGT124664	169	PWS12CT	41,207
63714131010	215	GGT123544	169	GGT124666	169	PWS14VP	207
63721050020	215	GGT123546	169	GGT124668	169	PWS38VP	41, 207
63726010018	215	GGT123548	169	GGT124670	169	PWS516VP	207
69908030010	215	GGT123550	169	GGT124672	169	PWZ12CT	207
69908030047	211	GGT123554	169	GGTTROLLEY	170	PWZ14VP	207
69908034025	215	GGT123560	169	GGTTROLLEYS	170	PWZ39VP	207
69908034234	215	GGT123572	169	HB12312	205	PWZ516VP	207
69908034235	215	GGT124112	169	HB124SS	205	ROCKITE	204
69908034252	215	GGT124116	169	HB125	205	RS12-70E	215
69908034253	215	GGT124118	169	HB125SS	205	SILICONE1	224
69908036109	215	GGT124120	169	HBD12	205	SILICONE2	224
69908036110	215	GGT124122	169	HBD38	205	SLE12214-BX	207
69908036135	215	GGT124124	169	HBD534	39, 205	SLE123-BX	207
69908120000	212	GGT124126	169	HBM10100	205	SLE124-BX	207
69908120001	212	GGT124128	169	HBM1050	205	SLE34414-BX	207
69908120448	212	GGT124130	169	HBM1080	205	SLE34614-BX	207
69908120450	212	GGT124132	169	HBM12120	205	SLE383-BX	207
72905361120	212	GGT124134	169	HBM8100	205	SLE384-BX	207
118-011	208	GGT124136	169	HBM850	205	SS412116	214
123-116	208	GGT124138	169	HBM880	205	SS412116DP	214
123-498	208	GGT124140	169	HLS384CT	206	SS412132U	214
123-499	208	GGT124142	169	HLS385-BX	206	SS5116	214
123-500	208	GGT124144	169	HLS385CT	206	SS5116DP	214
124-675	208	GGT124146	169	HLZ384L	206	SS5132U	214
124-765	208	GGT124148	169	HLZ385L	206	SS6116	214
124-770	208	GGT124150	169	HZ38212VP	46, 205	SS7116	214
133-993	208	GGT124152	169	HZ38312VP	46, 205	SS7116DP	214
134-416	207	GGT124154	169	HZ383VP	46, 205	SSB5844TG	162
134-502	208	GGT124156	169	HZ384VP	46, 205	SSB5844TGB	162
134-517	208	GGT124158	169	ISS12234	206	SSB5844TSB	162
134-648	208	GGT124160	169	ISS12334	39, 41, 206	SSBSQ1244TG	161
134-656	208	GGT124162	169	ISS12412	39, 41, 206	SSBSQ1244TGB	161
134-679	208	GGT124164	169	ISS12512	206	SSBSQ1244TSB	161
134-700	208	GGT124166	169	ISS34512	206	SSCB18100	148
1375A	208	GGT124168	169	ISS38214	206	SSCB18250	148

PART#	PAGE#	PART#	PAGE#	PART#	PAGE#	PART#	PAGE#
SSCBW3834	142, 148	SSDRAPCB	157	SSEBREC502	119	SSFPM8TOM10	204
SSCBW93234	142, 148	SSDRAPCTB	157	SSEBREC503	119	SSFSRND100	84
SSCBCONBIW	150	SSDRARCLVL	157	SSEBREC504	119	SSGC014XX16S	95
SSCBCONBWS	150	SSDRARCSTR	157	SSEP0010216S	115	SSGC015XX16S	95
SSCBCONCRKIT	150	SSDRKIN36	155	SSEP001021B	115	SSGC101XX16S	89
SSCBCONCRT	150	SSDRKIN42	155	SSEP0012416S	115	SSGC103XX16S	89
SSCBCONECBL	150	SSDRKINS36	156	SSEP0012516S	115	SSGC106XX16S	89
SSCBCONECSS	150	SSDRKLR36	156	SSEP0020216S	115	SSGC201XX16S	89
SSCBCONFWL	150	SSDRKLR42	156	SSEP0022404S	115	SSGC201XXZMS	89
SSCBCONKIT10	150	SSDRKNL36	156	SSEP0030216S	115	SSGC203XX16S	89
SSCBCONKIT20	150	SSDRKNL42	156	SSEP0032416S	115	SSGC203XXZMS	89
SSCBCONKIT25	150	SSDRKNP36	156	SSEP0032504S	115	SSGC206XX16S	89
SSCBCONKIT30	150	SSDRKNP42	156	SSEP0070216S	115	SSGC206XXZMS	89
SSCBCONKIT5	150	SSDRKNR36	156	SSEP0072416S	115	SSGC207XX16S	89
SSCBCONSTAR	150	SSDRKNR42	156	SSEP0072516S	115	SSGC207XXZMS	89
SSCBECBL	141, 148	SSDRKQC36	155	SSEPREC11212	118	SSGC301XX16B	90
SSCBECSSCH	141, 148	SSDRKQC42	155	SSEPREC21B	118	SSGC301XX16S	54, 90
SSCBECSSDO	141, 148	SSDRKQCS36	156	SSEPREC21S	118	SSGC301XXZMB	90
SSCBIB14516	142	SSDRKSC36	155	SSEPREC212	118	SSGC301XXZMS	90
SSCBIB31614	142	SSDRKSC42	155	SSEPREC501	119	SSGC303XX16S	90
SSCBIB381532	142	SSDRKSR36	156	SSEPREC502	119	SSGC306XX16S	90
SSCBKIT41410	141	SSDRKTT36	155	SSEVACC1	223	SSGC411XX16B	91
SSCBKIT41415	141	SSDRKTT42	155	SSEVACC5	223	SSGC411XX16S	91
SSCBKIT41420	141	SSDRKTT536	156	SSEVACC6	223	SSGC411XXZMB	91
SSCBKIT41425	141	SSDS110	195	SSEVACC7	223	SSGC411XXZMS	91
SSCBKIT41430	141	SSDS111	195	SSEVDOOR1	222	SSGC413XX16S	91
SSCBKIT41440	141	SSDS112	196	SSEVDOOR2	222	SSGC417XX16S	91
SSCBKIT4145	141	SSDS113	196	SSEVEVER1	219	SSGC4314516B	91
SSCBKIT41450	141	SSEBI020116S	113	SSEVEVER2	219	SSGC4314516S	91
SSCBKIT41470	141	SSEBI040316S	113	SSEVEVER2S	219	SSGC431XX16B	58, 90
SSCBKIT71210	141	SSEBI320116S	113	SSEVEVER3	219	SSGC431XX16S	58, 90
SSCBKIT71215	141	SSEBI340316S	113	SSEVEVER4	219	SSGC431XXSET	90
SSCBKIT71220	141	SSEBI350316S	113	SSEVEVER6	219	SSGC431XXZMB	90
SSCBKIT71225	141	SSEB2020116S	113	SSEVPROCOAT1	221	SSGC431XXZMS	90
SSCBKIT71230	141	SSEB2040316S	113	SSEVPROCOAT2	221	SSGC433XX16S	90
SSCBKIT71240	141	SSEB3020116S	113	SSEVPROCOAT3	221	SSGC437XX16S	90
SSCBKIT7125	141	SSEB3021116S	113	SSEVPROTECT1	220	SSGC451XX16S	92
SSCBKIT71250	141	SSEB3040316S	113	SSEVPROTECT2	220	SSGC461XX16S	92
SSCBNE18	142	SSEB3050316S	113	SSEVPROTECT3	220	SSGCH40116S	92
SSCBQC18	148	SSEB4020116S	114	SSEVPROTECT4	220	SSGF0010016B	129
SSCBQCCLAG	148	SSEB4040304S	114	SSEVPROTECT6	220	SSGF0010016G	129
SSCBQCCLAG1	148	SSEB4120116S	114	SSEVPROTECT8	220	SSGF0010016S	129
SSCBQCPI8	148	SSEB4140316S	114	SSEVSSKIT1	222	SSGF001001GB	129
SSCBQCPT18	148	SSEB7020104S	114	SSEVSSKIT2	222	SSGF0020016S	130
SSCBRC18	142	SSEB7040304S	114	SSFB0012216S	124	SSGF100X16B	129
SSCBRT18	142	SSEB8020116S	114	SSFB0022216S	124	SSGF100X16G	129
SSCBSL1478	142	SSEB8040316S	114	SSFB0032216S	124	SSGF100X16GB	129
SSCBTG	142	SSEB8050316S	114	SSFB212304	112	SSGF10GM16S	128
SSCBTT	142	SSEB9020116S	116	SSFL8X1	203	SSGF10GX16S	128
SSCBWCUT18	142	SSEB9040316S	116	SSFLPK1	41, 203	SSGF11GM16B	128
SSCLEANER	143, 145, 224	SSEB9050316S	116	SSFLPK2	41, 203	SSGF11GM16GB	128
SSDRAIBINT	157	SSEBLNDFLUSH	114	SSFLPK3	203	SSGF11GM16S	127, 128
SSDRAIBQC	157	SSEBLNDLEFT	114	SSFLPK32	203	SSGF11GM17B	128
SSDRAIBQCS	157	SSEBLNDRIGHT	114	SSFP0012116S	124	SSGF11GM17S	128
SSDRAIBSCIS	157	SSEBREC2101	118	SSFP0012216S	124	SSGF11GM18B	128
SSDRAIBTT	157	SSEBREC211B	118	SSFP0022116S	124	SSGF11GM18S	128
SSDRAIBTTS	157	SSEBREC212B	118	SSFP0022216S	124	SSGF12GM16B	131
SSDRAIPAD	157	SSEBREC213B	118	SSFP0112216S	124	SSGF12GM16S	131
SSDRAPAINTB	157	SSEBREC501	119	SSFPM6TOM8	204	SSGF13GM16B	131

Index

PART#	PAGE#	PART#	PAGE#	PART#	PAGE#	PART#	PAGE#
SSGFI3GM16S	131	SSGWPF90	181, 182	SSHPSQR50X4	78	SSKCAP112GAS	44
SSGFI4GM16B	131	SSGWPFNH	181, 182	SSHPSQR50X5	78	SSKCAP112GAX	44
SSGFI4GM16S	131	SSGWPFPIVOT	181	SSHPSQR50X6	78	SSKCAP1146S	44
SSGF200X16S	130	SSGWPFSTOP	182, 183	SSHPZAC01	78	SSKCAP114GAS	44
SSGR10001RBN	89	SSGWPFX1	181, 182	SSHPZAC02	78	SSKCAP24B	44
SSGR10002RBN	89	SSGWPFX2	181, 182	SSHPZAC03	66, 78	SSKCAP26GB	44
SSGR10003RBN	89	SSGWPFX3	181, 182	SSHPZAC04	66, 78	SSKCAP26S	44
SSGR20001RBN	89	SSGWPFX4	181, 182	SSHPZAC05	66, 78	SSKCAP2GAS	44
SSGR20002RBN	89	SSGWPFX5	182, 183	SSHPZAC06	66, 78	SSKCAP2GAX	44
SSGR20003RBN	89, 95	SSGWPFX5B	182, 183	SSHPZAC07	80	SSKFI21	46, 204
SSGR20004RBN	89, 95	SSGWPFX5SA	182, 183	SSHPZAC08	80	SSKF381	41, 46, 204
SSGR30001RBN	90	SSGWPFX5SS	182, 183	SSHPZAC09	79, 80	SSKF382	46, 204
SSGR30002RBN	90	SSGWPFX6	181	SSHPZAC10	80	SSKF383	44, 46, 204
SSGR30003RBN	90	SSGWPFX7B	183	SSHPZAC11	80	SSKF384	44, 46, 204
SSGR41001RBN	90, 91	SSGWPFX7SA	183	SSHPZAC12	79	SSKF5161	46, 204
SSGR41001RBN	90, 91	SSGWPFX7SS	183	SSHPZAC13	79	SSKFHB38212	46, 205
SSGR41002RBN	90, 91	SSGWPFX8B	183	SSHPZAC14	79	SSKFHB38314	46, 205
SSGR41002RBN	90, 91	SSGWPFX8SA	183	SSJ112112	40, 41	SSKFHB384	46, 205
SSGR41003RBN	90, 91	SSGWPFX8SS	183	SSJ112112T	39	SSKFHB5161	46, 205
SSGR41003RBN	90, 91	SSGWPFX9B	183	SSJ112114	40, 41	SSKFHB13835	46, 205
SSGR41004RBN	90, 91	SSGWPFX9SA	183	SSJ1122	40, 41	SSKFHB1384	46, 205
SSGR513RBN	92	SSGWPFX9SS	183	SSJ1122T	39	SSKFW382	46, 204
SSGR515RBN	92	SSGWPFY12B	184	SSJ2112	40, 41	SSKFW38234	41, 46, 204
SSGR517RBN	92	SSGWPFY12S	184	SSJ22	40, 41	SSLIKIT	166
SSGR519RBN	92	SSGWPFY24B	184	SSJHB124SS	41, 205	SSL1WB100GB	166
SSGR521RBN	92	SSGWPFY24S	184	SSJQ112	40, 41	SSL1WB100S	166
SSGS0010016S	129	SSGWPFY36B	184	SSJT1	39, 40, 42	SSL1WB101GB	166
SSGWCHI12B	191	SSGWPFY36S	184	SSK1121124B	44	SSL1WB101S	166
SSGWCHI12BN	191	SSGWPFY48B	184	SSK1121126GB	44	SSL2KITELEC	166
SSGWCHI12CA	191	SSGWPFY48S	184	SSK1121126S	44	SSL2LED1	166
SSGWCHI12CP	191	SSGWPFY60B	184	SSK1121146S	44	SSL2LED2	166
SSGWCHI12E	191	SSGWPFY60S	184	SSK112126S	44	SSL2LED3	166
SSGWCHI1B	191	SSGWPFY72B	184	SSK1121346S	44	SSL2LED4	166
SSGWCHI1BN	191	SSGWPFY72S	184	SSK11214B	44	SSL2LED5	166
SSGWCHI1CA	191	SSGWPFZ48S	184	SSK11216GB	44	SSLIFTELITE	170
SSGWCHI1CP	191	SSHD0010404S	136	SSK11216S	44	SSLIFTELITE2	170
SSGWCHI1E	191	SSHD0030404S	136	SSK11224B	44	SSM10100SET	204
SSGWCHI2B	191	SSHD0060404S	136	SSK11226GB	44	SSM1060SET	204
SSGWCHI2BN	191	SSHDADJUST	136	SSK11226S	44	SSM1080SET	204
SSGWCHI2CA	191	SSHDEND12	136	SSK1125QR	45	SSM10ROD	204
SSGWCHI2CP	191	SSHDGLASS	136	SSK1125QRB	45	SSM12ROD	204
SSGWCHI2E	191	SSHDSQR04S	136	SSK1125QRGB	45	SSM4	203
SSGWCH200A	188	SSHPRND50B	78	SSK114126S	44	SSM505	204
SSGWCH200B	188	SSHPRND50C	78	SSK21124B	44	SSM612BX	203
SSGWCH200ECA	189	SSHPRND50E	78	SSK21126GB	44	SSM616BX	203
SSGWCH200ECB	189	SSHPRND50L	78	SSK21126S	44	SSM620BX	203
SSGWCH5834	191	SSHPRND50X1	80	SSK21146S	44	SSM625	203
SSGWCHSEAL1	192	SSHPRND50X2	78	SSK2126S	44	SSM8100SET	204
SSGWCHSEAL2	192	SSHPRND50X3	78	SSK21346S	44	SSM812	203
SSGWCHSEAL3	192	SSHPRND50X4	78	SSK214B	44	SSM816	203
SSGWFL34	191	SSHPRND50X5	78	SSK216GB	44	SSM820	203
SSGWLEGG	186	SSHPRND50X6	78	SSK216S	44	SSM850SET	204
SSGWLEGW	186	SSHPSQR50B	78	SSK224B	44	SSM8ROD	204
SSGWLM1	185	SSHPSQR50C	78	SSK226GB	44	SSNUT1213	41, 207
SSGWLM2	185	SSHPSQR50E	78	SSK226S	44	SSNUT3816	41, 207
SSGWLM3	185	SSHPSQR50L	78	SSK2346S	44	SSPC0600116S	84
SSGWLM4	185	SSHPSQR50X1	80	SSKCAP1124B	44	SSPC0761316S	84
SSGWLM5	185	SSHPSQR50X2	78	SSKCAP1126GB	44	SSPC0850416S	84
SSGWLM6	185	SSHPSQR50X3	78	SSKCAP1126S	44	SSPC1050116S	84

PART#	PAGE#	PART#	PAGE#	PART#	PAGE#	PART#	PAGE#
SSPC1050216S	84	SSPFEBADJ2	94	SSRIVETCM8	207	SSSM3GAP	12
SSPC1051316S	84	SSPFEBADJB	93	SSRIVETM6	207	SSSM3GRIPS	12
SSPC1051416S	84	SSPFEBADJG	93	SSRIVETM8	207	SSSM3JOINPIN	8, 12, 16, 20
SSPC1251416S	84	SSPFEBADJGB	93	SSRK-1500	224	SSSM3SHIM1	12
SSPE36BPPEB	54, 55, 56	SSPFEBADJS	93	SSRODI2304	112	SSSM3SHIM2	12
SSPE36BPEF	54, 55, 56	SSPFEBTS	93	SSRODSQ12304	112	SSSM3SHOE10	10
SSPE36BPPEM	54, 55, 56	SSPFEBWALL1	94	SSSH1239G	161	SSSM3SHOE10A	10
SSPE36LNDB	54, 56	SSPFEBWALL2	94	SSSH1239GB	161	SSSM3SHOE10B	10
SSPE36LNDNC	54, 55, 56	SSPFEBWALLB	93	SSSH1239SB	161	SSSM3SHOE10S	10
SSPE36LNDE	54, 55, 56	SSPFEBWALLG	93	SSSHRD58G	162	SSSM3SHOE20	10
SSPE36LNDL	54, 55, 56	SSPFEBWALLGB	93	SSSHRD58GB	162	SSSM3SHOE20A	10
SSPE36STBB	54, 56	SSPFEBWALLS	93	SSSHRD58SB	162	SSSM3SHOE20S	10
SSPE36STBF	54, 56	SSPFGL1801FB	177	SSSM2CCKITA	7	SSSM3SIDE10A	10
SSPE36STBM	54, 56	SSPFGL1801FS	177	SSSM2CCKITB	7	SSSM3SIDE10B	10
SSPE36STEB	54, 55, 56	SSPFGL601G	170, 177	SSSM2CCKITS	7	SSSM3TCC10A	11, 15, 19
SSPE36STEF	54, 55, 56	SSPFGL601GB	170, 177	SSSM2CCSHOEI	7	SSSM3TCC10B	7, 11, 15, 19
SSPE36STEM	54, 55, 56	SSPFGL601GS	170, 177	SSSM2CCSHOEIO	7	SSSM4CCSHOEI	15
SSPE36STLB	54, 55, 56	SSPFGL601IW	170, 177	SSSM2CLADA	7	SSSM4CCSHOEIO	15
SSPE36STLF	54, 55, 56	SSPFGL601WB	170, 177	SSSM2CLADB	7	SSSM4DRAINT	16
SSPE36STLM	54, 55, 56	SSPFGL601WS	170, 177	SSSM2CLADS	7	SSSM4ENDCAP1	16
SSPE42LNDE	54, 56	SSPFGLWFB	177	SSSM2DRAINT	7	SSSM4ENDCAP2	16
SSPE42LNDL	54, 56	SSPFGLWFS	177	SSSM2ENDCAP1	8	SSSM4ENDCAP3	16
SSPEFT36LNC	62, 63	SSPFH155GB	174	SSSM2ENDCAP2	8	SSSM4GAP	16
SSPEFT36LNE	62, 63	SSPFH155CS	174	SSSM2ENDCAP3	8	SSSM4GLASS1	14
SSPEFT36LNL	62, 63	SSPFH155WB	174	SSSM2ENDCPIX	8	SSSM4GLASS2	14
SSPEFT36SBE	62, 63	SSPFH155WS	174	SSSM2ENDCP2X	8	SSSM4GLASS3	14
SSPEFT36SL	62, 63	SSPFH156B	174	SSSM2ENDCP3X	8	SSSM4GRIPS	16
SSPEFT36T42	62, 64	SSPFHHGGS	170, 173	SSSM2GAP	8	SSSM4SHIM1	16
SSPEFT36TL	62, 64	SSPFHHGWS	170, 173	SSSM2GRIPS	8	SSSM4SHIM2	16
SSPEFT36TR	62, 64	SSPFHSLGGS	174	SSSM2SHIM	8	SSSM4SHOE10	14
SSPEFT42BL	62, 64	SSPFHSLGWS	174	SSSM2SHOE10	6	SSSM4SHOE10A	14
SSPEFT42LNC	62, 64	SSPFSTOPIB	178	SSSM2SHOE10A	6	SSSM4SHOE10B	14
SSPEFT42LNE	62, 64	SSPFSTOPIB	178	SSSM2SHOE10B	6	SSSM4SHOE10S	14
SSPEFT42LNL	62, 64	SSPG16642	71	SSSM2SHOE10S	6	SSSM5CCSHOEI	19
SSPEXS36LNC	58, 59	SSPG166X42E	72	SSSM3CCKITA	11, 15, 19	SSSM5CCSHOEIO	19
SSPEXS36LNE	58, 59	SSPG166X42L	72	SSSM3CCKITB	11, 15, 19	SSSM5DRAINT	20
SSPEXS36LNL	58, 59	SSPH12X34PK	203	SSSM3CCKITS	11, 15, 19	SSSM5ENDCAP1	20
SSPEXS36SBE	58, 59	SSPH620X38	203	SSSM3CCSHOEI	11, 19	SSSM5ENDCAP2	20
SSPEXS36SL	58, 59, 60	SSPL0800616S	83	SSSM3CCSHOEIO	11, 19	SSSM5ENDCAP3	20
SSPEXS36T42	58, 60	SSPL1000116S	83	SSSM3CLADA	11, 15, 19	SSSM5GAP	20, 21, 22
SSPEXS36TL	58, 60	SSPR166L36	71	SSSM3CLADA1	11, 15, 19	SSSM5GLASS1	18
SSPEXS36TR	58, 60	SSPSQ4042	73	SSSM3CLADB	11, 15, 19	SSSM5GLASS2	18
SSPEXS42BL	58, 60	SSPSQ4048	73	SSSM3CLADC	11, 15, 19	SSSM5GRIPS	20
SSPEXS42LNC	58, 60	SSPSQ4044B	73	SSSM3CLADM	11, 15, 19	SSSM5SHIM1	20
SSPEXS42LNE	58, 60	SSPSQ40X36L	74	SSSM3CLADS	11, 15, 19	SSSM5SHIM2	20
SSPEXS42LNL	58, 60	SSPSQ40X42E	74	SSSM3CLADS1	11, 15, 19	SSSM5SHOE10	18
SSPFEB1801	94	SSPSQ5042	73	SSSM3CLADXA	11	SSSM5SHOE10A	18
SSPFEB1802	94	SSPW0581516S	83	SSSM3CLADXB	11	SSSM5SHOE10B	18
SSPFEB180B	93	SSPW0701516S	83	SSSM3DRAINS	11	SSSM5SHOE10S	18
SSPFEB180G	93	SSPW0801116S	83	SSSM3DRAINT	11	SSSM6DRAINL	21
SSPFEB180GB	93	SSPW1001216S	83	SSSM3ENDCAP1	12	SSSM6DRAINY	22
SSPFEB180S	93	SSPW1001616S	83	SSSM3ENDCAP2	12	SSSM6GLASS1	21, 22
SSPFEB901	94	SSPW1071316N	83	SSSM3ENDCAP3	12	SSSM6GLASS2	21, 22
SSPFEB902	94	SSPW44216S	83	SSSM3ENDCAP5	12	SSSM6GLASS3	21, 22
SSPFEB90B	93	SSPW45016S	83	SSSM3ENDCAP7	12	SSSM6GLASS4	21, 22
SSPFEB90G	93	SSRIVET	207	SSSM3ENDCPIX	12	SSSM6SHIM1	21, 22
SSPFEB90GB	93	SSRIVET38	207	SSSM3ENDCP2X	12	SSSM6SHIM2	21, 22
SSPFEB90S	93	SSRIVETC38	207	SSSM3ENDCP3X	12	SSSM6SHOELA	21
SSPFEBADJ1	94	SSRIVETCM6	207	SSSM3ENDCP4X	12	SSSM6SHOELB	21

Index

PART#	PAGE#	PART#	PAGE#	PART#	PAGE#	PART#	PAGE#
SSSM6SHOELS	21	SSTREC212	112, 118	SSUTALS2SB	105	SSUTSQ404	100
SSSM6SHOEYA	22	SSTREC21B	112, 118	SSUTALTICA	106	SSUTSQ405	100
SSSM6SHOEYB	22	SSTREC5010	112, 119	SSUTALT2CA	106	SSUTSQ401B	100
SSSM6SHOEYS	22	SSTS0030016S	125	SSUTALT3CA	106	SSWB0100016B	127
SSSMCLADTAPE	7, 11, 15, 19	SSTS1060016S	125	SSUTALT4CA	106	SSWB0100016S	127
SSSP0012116S	124	SSTS1070004S	125	SSUTALT5	106	SSWB010001GB	127
SSSP0012216S	124	SSTS2030016S	125	SSUTCHI00	107	SSWB0100116B	131
SSSP0022116S	124	SSTS2050016S	125	SSUTCHI01	107	SSWB0100116S	131
SSSP0122016S	124	SSTS2060016S	125	SSUTCHI02	107	SSWB0100216B	131
SSSPANNER1	46	SSTSQ1215304	112	SSUTCHI03	107	SSWB0100216S	131
SSSPANNER2	46	SSTSQ123048	137	SSUTCHI04	107	SSWB0100316B	131
SSSPANNER3	46	SSTSQ22304	112, 117	SSUTCHI05	107	SSWB0100316S	131
SSSPANNER4	46	SSTSQ3415304	112	SSUTCHI06	107	SSWB1109016S	127
SSSPIGOT10B	36	SSTSQ402304	112, 117	SSUTCHI07	107	SSWB111216B	128
SSSPIGOT10GB	36	SSTSQ402304B	112, 117	SSUTCHI08	107	SSWB111216GB	128
SSSPIGOT10S	36	SSTSQ402316	112, 117	SSUTCHI09	107	SSWB111216S	128
SSSPIGOTADJ	29	SSUA0010116B	123	SSUTCH212	110	SSWB111416B	128
SSSPIGOTADJB	29	SSUA0010116G	123	SSUTCH217	110	SSWB111416GB	128
SSSPIGOTADJN	30	SSUA0010116S	123	SSUTCH221	110	SSWB111416S	128
SSSPIGOTADJP	30	SSUA001011GB	123	SSUTCH230A	110	SSWB111426S	128
SSSPIGOTAGB	29	SSUA0010316B	123	SSUTCH230B	110	SSWB1301116S	127
SSSPIGOTBOLT	29, 31, 203	SSUA0010316S	123	SSUTCH231A	110	SSWB2311116S	127
SSSPIGOTEDB	29	SSUA001031GB	123	SSUTCH231B	110	SSWB3116B	128
SSSPIGOTEDGE	31	SSUA0010616B	123	SSUTCH232A	110	SSWB3116GB	128
SSSPIGOTEGB	31	SSUA0010616S	123	SSUTCH232B	110	SSWB3116S	128
SSSPIGOTS6B	33	SSUA001061GB	123	SSUTCH233A	110	SSWB3216B	128
SSSPIGOTS6G	33	SSUA0010716S	123	SSUTCH233B	110	SSWB3216GB	128
SSSPIGOTS6GB	33	SSUA0012116B	123	SSUTCH300	108	SSWB3216S	128
SSSPIGOTS6S	33	SSUA0012116G	123	SSUTCH301	108	SSWB3316S	128
SSSPIGOTS8B	34	SSUA0012116S	123	SSUTCH302	108	SSWF0010016B	129
SSSPIGOTS8C	34	SSUA001211GB	123	SSUTCH303	108	SSWF0010016G	129
SSSPIGOTS8GB	34	SSUA0012316S	123	SSUTGASKET1	102, 108	SSWF0010016S	129
SSSPIGOTS8P	35	SSUA0012616S	123	SSUTGASKET2	102, 108	SSWF001001GB	129
SSSPIGOTS8S	34	SSUA0012716S	123	SSUTGASKET2A	102, 108	SSWF0020016S	130
SSSPIGOTSIDB	32	SSUC0010316S	84	SSUTGASKET3	102, 108	SSWF100X16B	129
SSSPIGOTSIDE	32	SSUC0010616S	84	SSUTGASKET3A	102, 108	SSWF100X16C	129
SSSPIGOTSIDT	32	SSUTALROB	104, 165	SSUTGASKET4	102, 108	SSWF100X16GB	129
SSSPIGOTSIGB	32	SSUTALROCA	104, 165	SSUTREC400	101, 165	SSWF100X16S	129
SSSPRAYPAINT	224	SSUTALR1B	105	SSUTREC401	101	SSWF20016B	130
SST11215304	112, 113	SSUTALR1CA	105	SSUTREC402	101	SSWF20016S	130
SST11215316	112, 113	SSUTALR2B	105	SSUTREC403	101	SSWF20116B	130
SST1215304	112, 113	SSUTALR2CA	105	SSUTREC404	101	SSWF20116S	130
SST1662304	112, 113	SSUTALRECOB	104	SSUTREC405	101	SSWF20216B	130
SST1662304B	112, 113	SSUTALRECOCA	104	SSUTREC406	101	SSWF20216S	130
SST1662316	112, 113	SSUTALRECOSB	104	SSUTREC407	101	SSWRENCH1	8, 12, 16, 20
SST215304	112, 113	SSUTALREC1B	105	SSUTREC600	165		
SST3415304	112, 113	SSUTALREC1CA	105	SSUTRND4240	99, 165		
SST5815304	112, 113	SSUTALREC1SB	105	SSUTRND4240B	99, 165		
SST583048	137	SSUTALREC2B	105	SSUTRND4241	99		
SSTF0030016S	125	SSUTALREC2CA	105	SSUTRND4242	99		
SSTF2030016S	125	SSUTALREC2SB	105	SSUTRND4243	99		
SSTF2050016S	125	SSUTALS0B	104, 165	SSUTRND4245	99		
SSTF2060016S	125	SSUTALS0CA	104, 165	SSUTRND4246	99		
SSTLMPAB	48	SSUTALS0SB	104, 165	SSUTRND4246B	99		
SSTLMPSS	48	SSUTALS1B	105	SSUTRND4247	99		
SSTLMPVAB	48	SSUTALS1CA	105	SSUTSQ400	100, 165		
SSTLMPVSS	48	SSUTALS1SB	105	SSUTSQ401	100		
SSTREC11212	112, 118	SSUTALS2B	105	SSUTSQ402	100		
SSTREC21	112, 118	SSUTALS2CA	105	SSUTSQ403	100		

GET CONNECTED!

Stay up-to-date on the latest products.

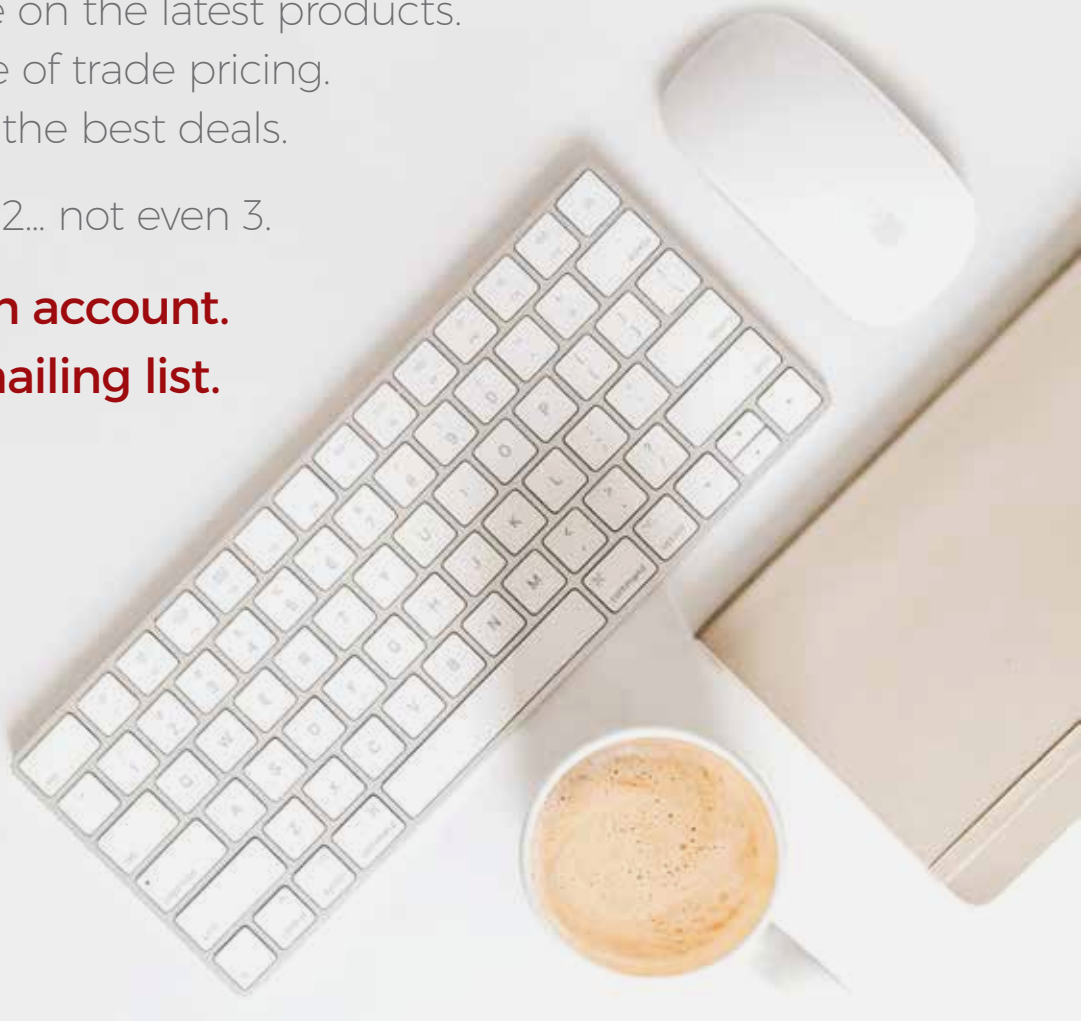
Take advantage of trade pricing.

Get a jump on the best deals.

It's as easy as 1, 2... not even 3.

1. Register an account.

2. Join our mailing list.



GLASS GUARD DESIGN INFORMATION

Glass forming a guard or used as a component of a guard is required to be designed for the loads and requirements specified in the Building Code and its referenced standards such as CAN/CGSB-12.20-M89 "Structural Design of Glass for Building" specified in the Sec. 4.3.6 of the Codes.

Free-standing glass guards are cantilevered glass panels supported at the bottom only. Glass panels secured by base shoes, spigots and standoffs are considered as cantilevered glass guard. Article 7.1 of CAN/CGSB-12.20-M89 requires all free-standing glass guards be capped by a rail which is continuous over two or more panels.

Specifying glass size and checking deflection is a site condition carried out by installers based on span, guard configuration, glass thickness, application, location, etc.

Consult with your local Building Code authority about specific requirements.



DISCLAIMER: Euro Architectural Components carefully reviewed to ensure that the content in this catalogue was accurate at the time of print. We are not responsible for misinformation due to human error. Images or colours may not be exact due to rendering, photographic, or printing procedures. Consult your local authorities to ensure your design complies with all building code requirements. For our complete terms & conditions scan here, or copy the following link: <https://euroeac.com/terms-conditions/>.