
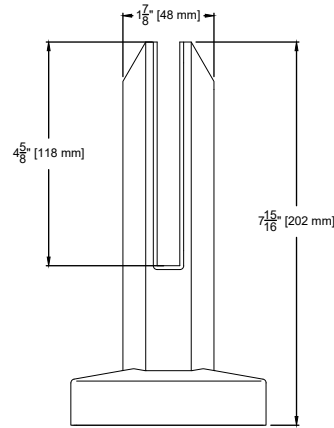


8" - STANDARD TOP MOUNT SPIGOT


Suits Stopper Pin to secure glass panel for stair applications

Dimensions


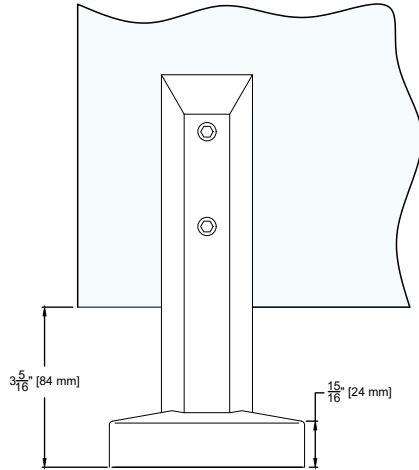


FINISH	CODE
Satin	SSSPIGOTS8S
Black	SSSPIGOTS8B
Graphite Black	SSSPIGOTS8GB


This drawing is the property of Euro Ornamental Forgings Inc. and may not be copied or reproduced in any way whatsoever without express written permission of said company.

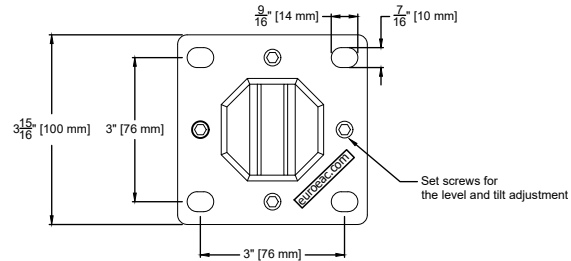

Components

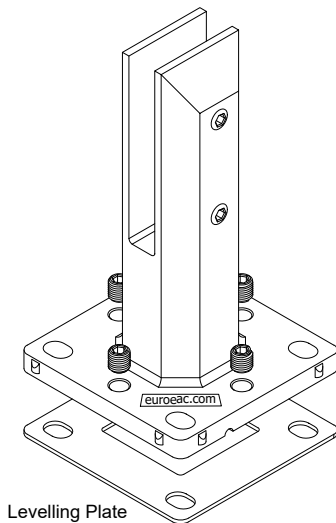

Gasket with
SS Pressure Plate


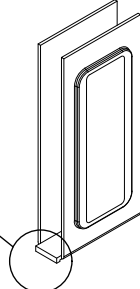


NOTE:
Install the Gasket after mounting the Plate Cover. Otherwise, small tabs at the bottom of the Gasket do not allow the Plate Cover to pass for installation.

Stopper Pin (Sold separately)
Prevents glass panel from sliding for stair applications. Glass panels require cut-out for the Stopper Pin.

Product Code:
SSSPIGOTSM8P
Patent pending.

NOTE:
Install the Stopper Pin before securing the spigot to the floor. Remove the Gasket, and put the Rectangular Washer into the slot. Then place the Stopper Pin and attach the nut at the bottom. Insert an Allen key #5 into the socket of the Stopper Pin and tighten to be secured.

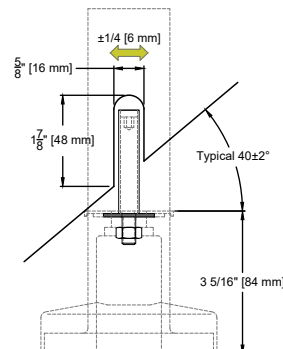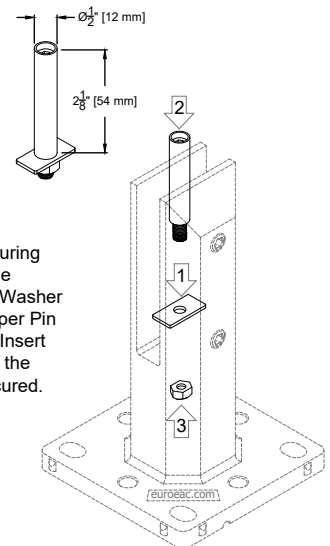

NOTE:
There is a possibility to adjust the Stopper Pin up to max of $\pm 1/4$ " [6 mm] sideways without removing the spigot. Insert an Allen key #5 into the socket of the Stopper Pin to loosen for adjustment, and tighten again to be secured.