

Glass Partition Systems

Modern Solutions for Innovative, Affordable, and Functional Workspaces




Glass Channel Kit



EAC Glass Channel Kit

The Glass Channel Kit creates a safe and clean, modern finish to your Glass Walls or Partitions.

- Packed as a 3,658mm (12ft) Kit, including top and bottom Channels, End Caps, and Gaskets.
- Designed for top and side mount applications.
- Easy installation with **removable Cover**.
- Full-frame glazing (4 sides) possible.
- Engineered based on the Building Code sec. 4.1.5.14 "**Loads on Guards**", and 4.1.5.16 "**Loads on Walls Acting as Guards**", and CAN/CGSB 12.20-M89.

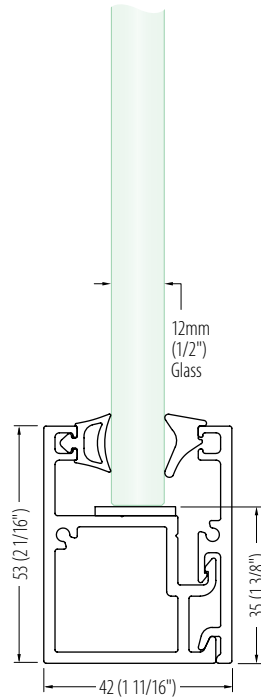

SSGWCH200A


Brushed Clear Anodized Aluminum

SSGWCH200B

Brushed Black Anodized Aluminum




EAC Glass Channel Kit Includes

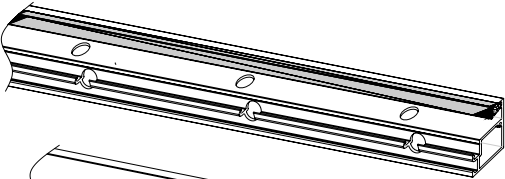


(A) (x2) 3,658mm (12ft) Profile with attached Gasket




(B) (x2) 3,658mm (12ft) Cover




(C) (x2) 3,658mm (12ft) Gasket for Cover



(D) (x1) 3,658mm (12ft) Setting Block



(E) (x4) End Cap (x8) Screw




(F) (x6) Holder Plate (x12) Screw



Need Extra End Caps?
Sold separately in packs of 2

Part #	Finish
SS6WCH200ECA	Brushed Clear Anodized Aluminum
SS6WCH200ECB	Brushed Black Anodized Aluminum

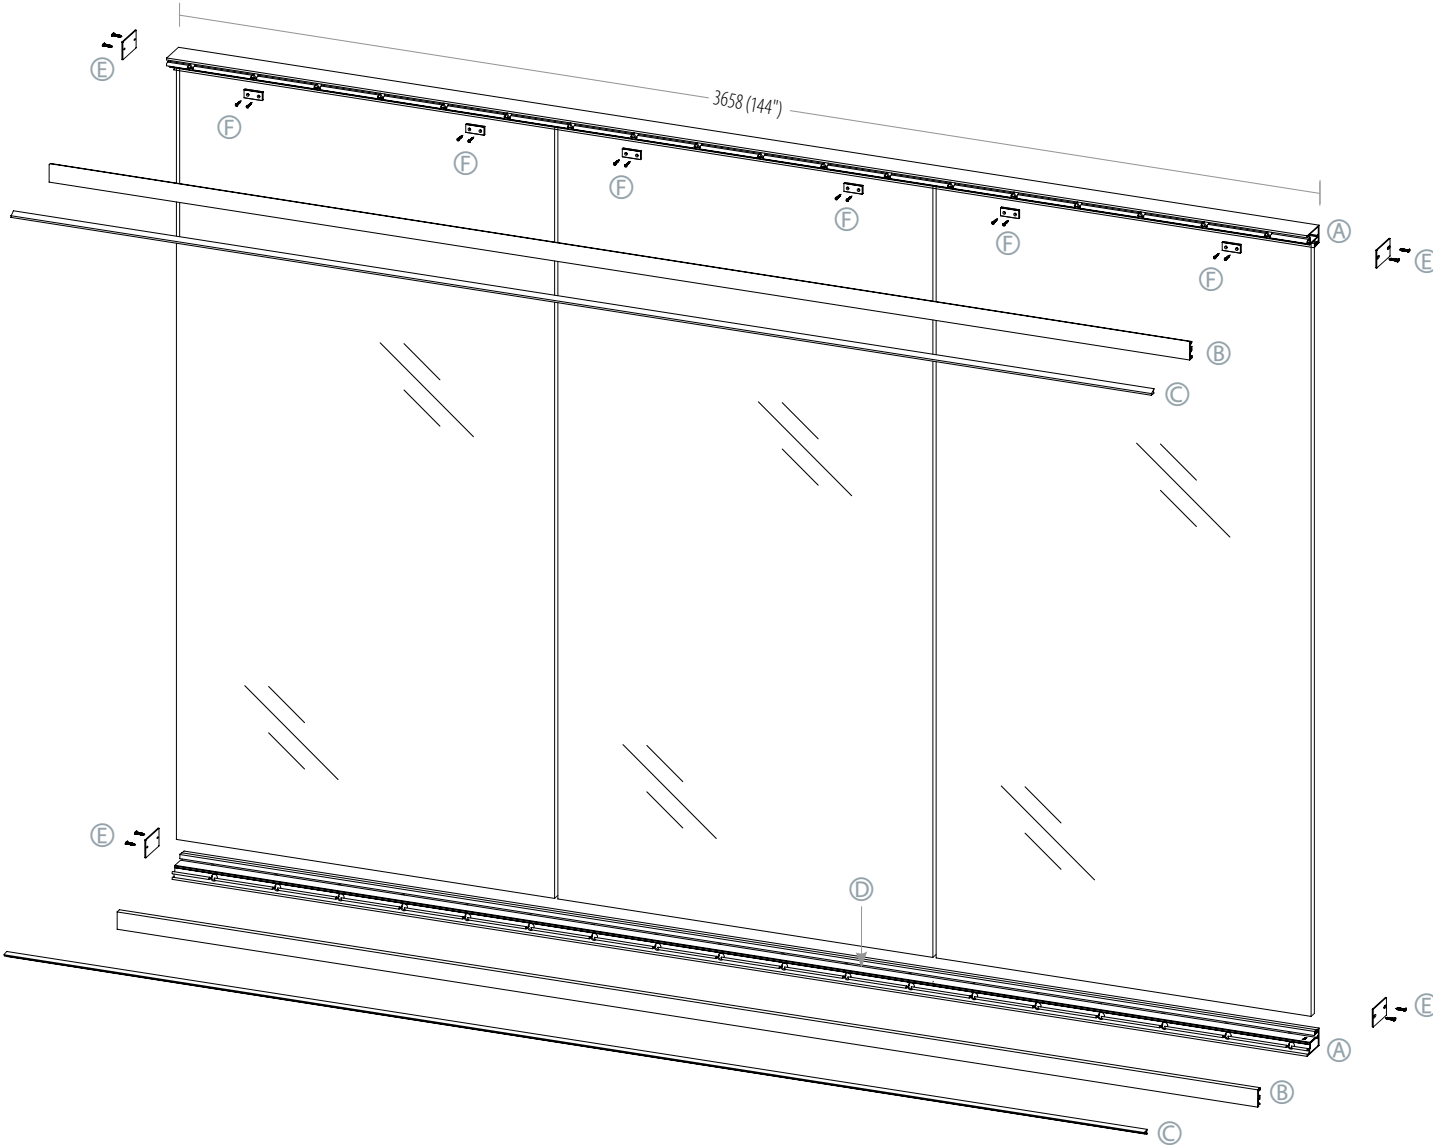

FIVE

EASY STEPS TO INSTALL



1

Install channels on top and bottom



2

Insert back-side gasket.



3

Place glass panel and tighten grip plate.



4

Clip on cladding and insert front-side gasket.



5

Screw in end caps.




Glass Channels



Standard Glass Channels

Our Glass Channels are designed to offer both function and style. Made from durable aluminum, these minimal C-channels are perfect for securing 12mm (1/2") glass, providing edge protection or decorative trim. They can be easily installed using silicone and come in a 3658mm (144") length. Available in four finishes: Clear Anodized, Brushed Nickel, Brushed Black, and Chrome Polished, each package contains 40 individually wrapped lengths, ensuring easy handling and installation.

We also offer compatible glazing rubber gaskets, a spline for easy installation, and rubber setting blocks to secure the glass. These versatile aluminum profiles are a reliable choice for enhancing both durability and appearance of any glass partition system.

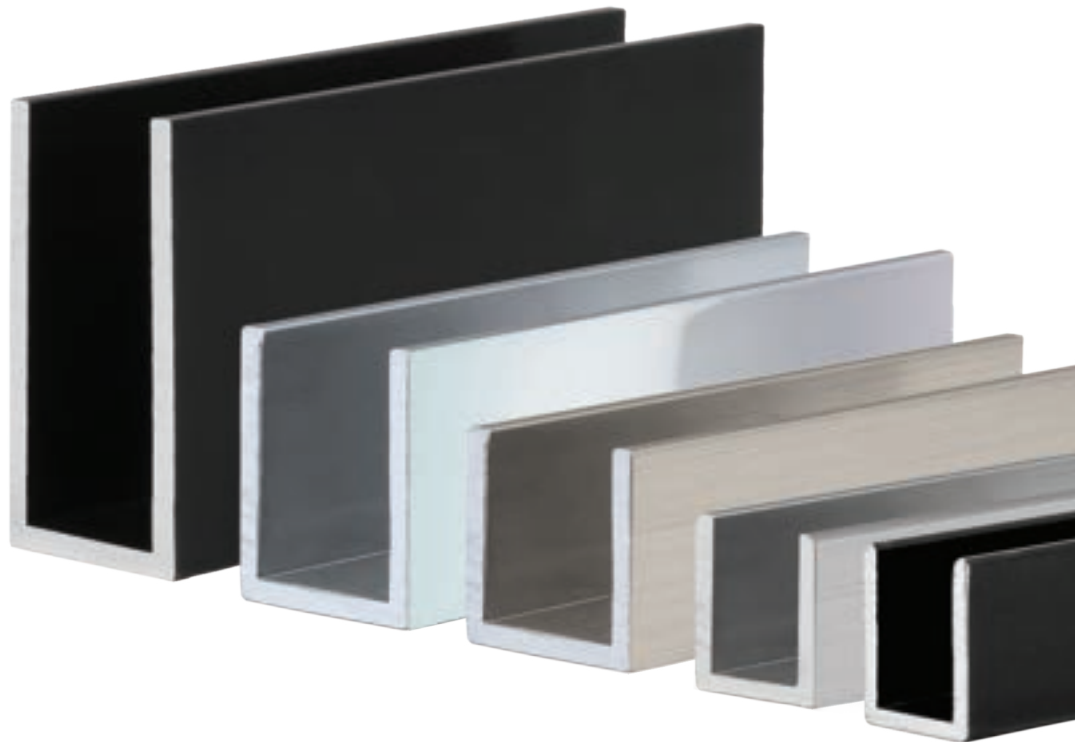


EAC Glass Channels

A
Brushed Clear
Anodized
Aluminum

B
Brushed Black
Anodized
Aluminum


BN
Brushed
Nickel

CP
Chrome Polish
Anodized
Aluminum



Shown in (B)
Brushed Black Anodized Aluminum

Available matching end cap
sold separately




9/16" x 3/4"

Part #	Finish
SSSFCH101	B, BN, CP
Available End Cap - Sold Separately	
Part #	Finish
SSSFCH101E	A, B, BN, CP



Shown in (A)
Brushed Clear Anodized Aluminum




11/16" x 3/4"

Part #	Finish
SSGWCH5834	A, B, BN, CP



Shown in (BN)
Brushed Nickel Anodized Aluminum

Available matching end cap
sold separately




1" x 1"

Part #	Finish
SSGWCH11	A, B, BN, CP
Available End Cap - Sold Separately	
Part #	Finish
SSGWCH11E	A, B, BN, CP



Shown in (CP)
Chrome Polish Anodized Aluminum

Available matching end cap
sold separately





1" x 1 1/2"

Part #	Finish
SSGWCH112	A, B, BN, CP
Available End Cap - Sold Separately	
Part #	Finish
SSGWCH112E	A, B, BN, CP



Shown in (B)
Brushed Black Anodized Aluminum

Available matching end cap
sold separately

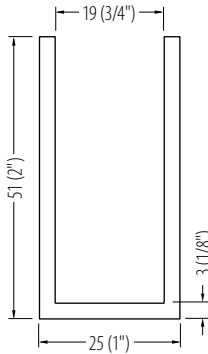


1" x 2"

Part #	Finish
SSGWCH12	A, B, BN, CP
Available End Cap - Sold Separately	
Part #	Finish
SSGWCH12E	A, B, BN, CP



Shown in (A)
Brushed Clear Anodized Aluminum




Aluminum Flat Bar
1/8" x 3/4" X 144"

Part #	Finish
SSGWFL34	A, B

Glazing Rubber Gaskets - Rolls of 30,480mm (100').

Use for Channels with a 19mm (3/4") inner dimension.

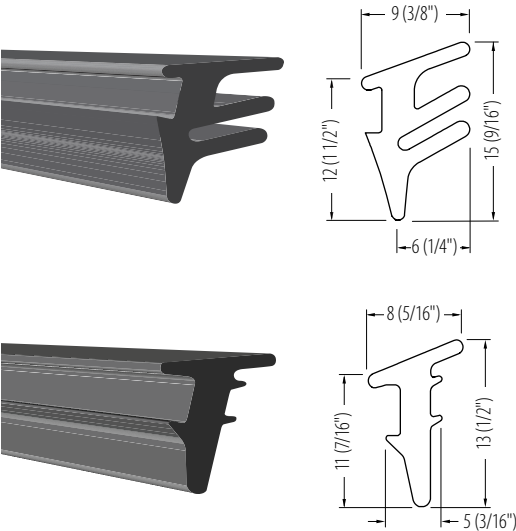


Part #	Glass Size
SSGWCHSEAL1	10 (3/8")

Part #	Glass Size
SSGWCHSEAL2	12 (1/2")

Glazing Rubber Setting Blocks - Packs of 10

Use for Channels with a 19mm (3/4") inner dimension.

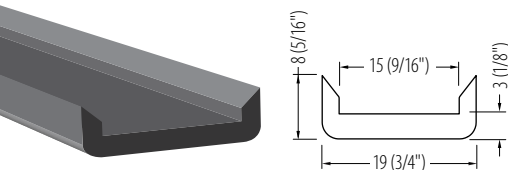

Part #	Glass Size
SSGWCHSEAL3	10 (3/8")

Clear PVC Setting Blocks - Packs of 100

Use with all Channels. Blocks are 50.8mm (2") long.

Clear setting blocks are used to level glass panels during installation.




Part #	Thickness
SSSFCHSET1	1 (1/32")
SSSFCHSET2	3.2 (1/8")
SSSFCHSET3	4 (5/32")
SSSFCHSET4	6.4 (1/4")
SSSFCHSET5	9.5 (3/8")

Spline to Install Gaskets



Part #
SSGWSPLINE

Glass Partition Configurations

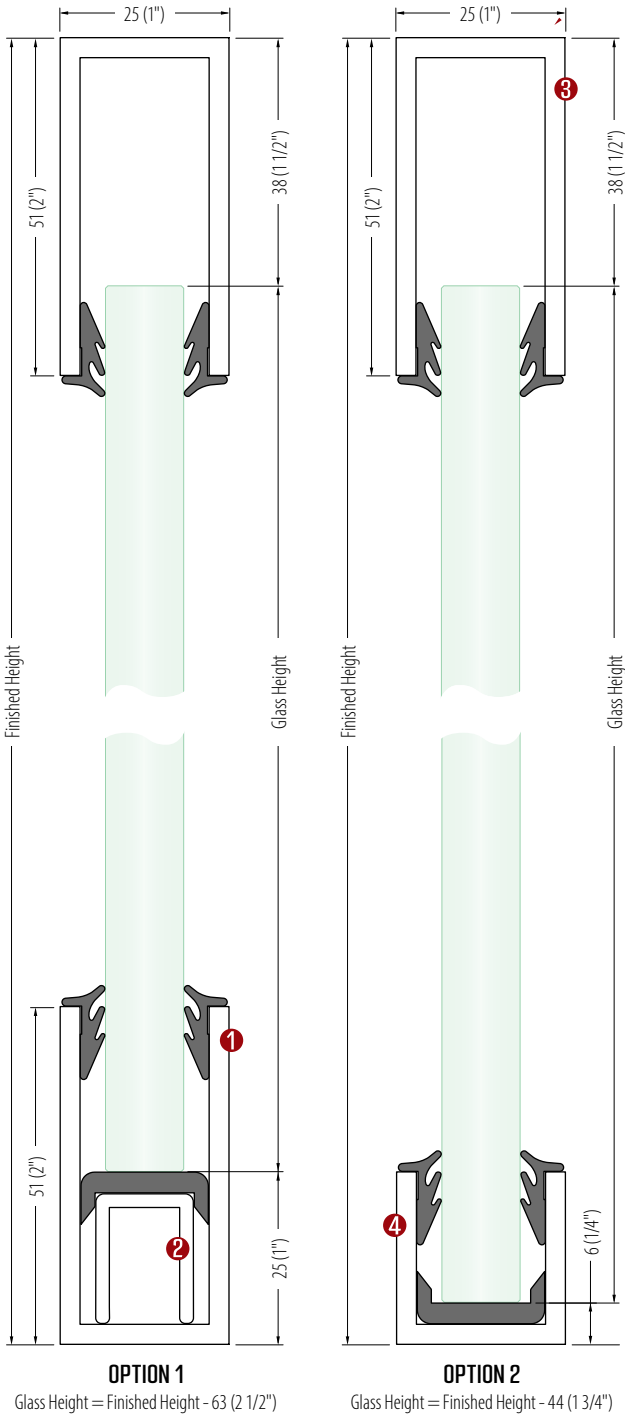

Referenced Parts

- OPTION 1:**
- ① Top/Bottom Channel: **SSGWCH12**
 - ② Inner Channel: **SSSFC101**
- OPTION 2:**
- ③ Top Channel: **SSGWCH12**
 - ④ Bottom Channel: **SSGWCH11**

Glass Door Hardware






EAC Glass Door Hardware



Our Glass Door Hardware collection is designed to bring strength, style, and versatility to any modern glass partition installation. From slim patch fittings and bold ladder handles to advanced magnetic and electronic locks, each product combines durability with a clean, contemporary look.

Patch fittings form the core of the system, offering secure solutions for doors, sidelites, and transoms with options like hydraulic door kits, pivot brackets, and wall-mounted patches. Matching accessories such as cladding plates, door stops, and patch locks complete the setup for a polished finish.

Complementing the fittings, our ladder-style glass door handles deliver both function and design impact, with lockable and non-lockable versions available in multiple sizes and finishes. For secure locking, M-Locks provide a sleek 31mm profile with a magnetic latch, while E-Locks bring wireless, keyless convenience for swing and sliding doors.

Available in a range of premium finishes, this collection offers a complete solution for creating elegant, functional, and reliable glass door systems.

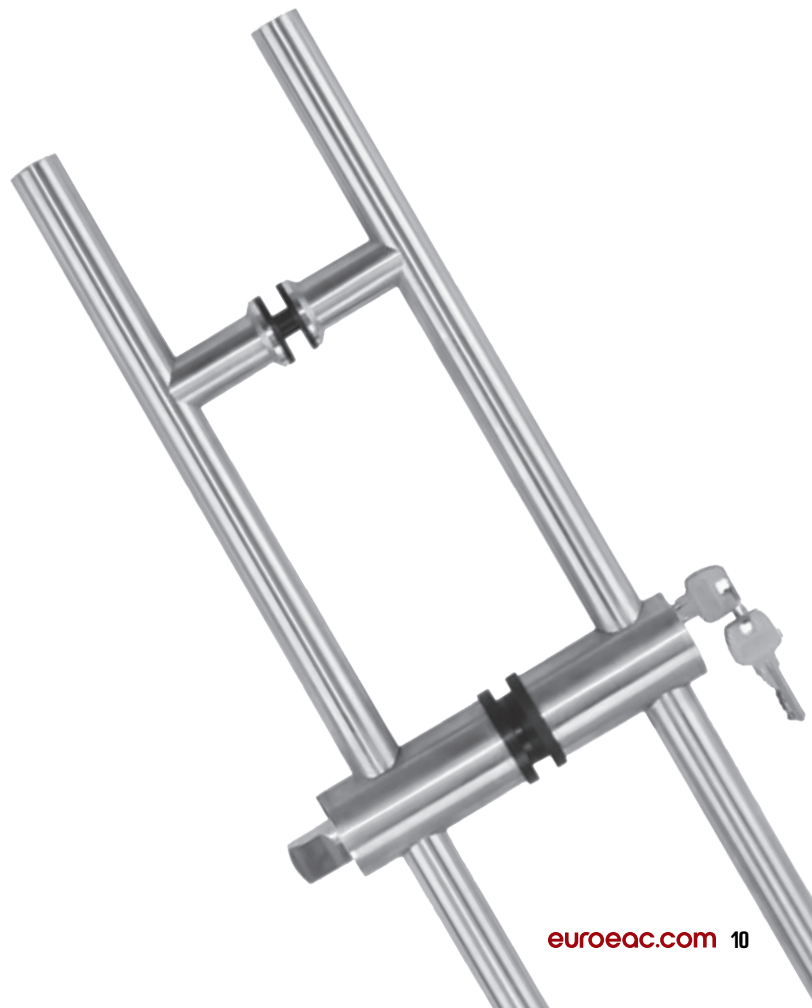

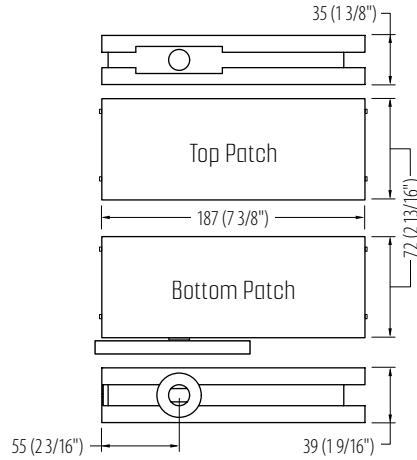


Hydraulic Patch Door Kit

Includes Bottom and Top Patch with Pivot Bracket.

SSGWPF90 90° Hold open.


SSGWPFNH Non-hold open.



Pivot Bracket for Top Patch


SSGWPFPIVOT

Used with all Finishes.




Top / Bottom Patch

SSGWPFX6




Sidelite Transom Patch

SSGWPFX1




Sidelite Transom Patch with Stopper

SSGWPFX2



Sidelite Mount Transom Patch with Pin


SSGWPFX3

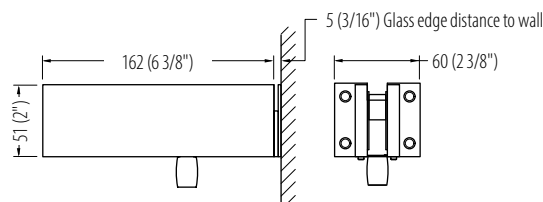


Wall Mount Transom Patch with Pin

SSGWPFX4

EAC Patch Fittings Configurations



1. **SSGWPF90** Hydraulic Patch Door Kit (90° Hold open), or
SSGWPFNH Hydraulic Patch Door Kit (Non-hold open).




Maximum
Door Width
1000mm (39 3/8")




Glass
Thickness
8-13mm (5/16"-1/2")



Maximum
Door Weight
100kg (220 lbs)



- 1a **SSGWPF90** Hydraulic Patch Door Kit (90° Hold open).
SSGWPFX5 Cladding Cover Plate for Top Patch. (Except for SA finish).
- 1b **SSGWPFNH** Hydraulic Patch Door Kit (Non-hold open).
SSGWPFX5 Cladding Cover Plate for Top Patch. (Except for SA finish).
- 2 **SSGWPFX4** Wall Mount Transom Patch.
- 3 **SSGWPFX4** Wall Mount Transom Patch.
SSGWPFSTOP Door Stop for Transom Patch (Optional - not included).




- 1a **SSGWPF90** Hydraulic Patch Door Kit (90° Hold open).
SSGWPFX5 Cladding Cover Plate for Top Patch. (Except for SA finish).
- 1b **SSGWPFNH** Hydraulic Patch Door Kit (Non-hold open).
SSGWPFX5 Cladding Cover Plate for Top Patch. (Except for SA finish).
- 2 **SSGWPFX4** Wall Mount Transom Patch.
- 3a **SSGWPFX1** Sidelite Transom Patch, or
SSGWPFX2 Sidelite Transom Patch with Stopper.
- 3b **SSGWPFX3** Sidelite Mount Transom Patch.
SSGWPFSTOP Door Stop for Transom Patch (Optional - not included).




(3a)



(3b)



- 1a **SSGWPF90** Hydraulic Patch Door Kit (90° Hold open).
SSGWPFX5 Cladding Cover Plate for Top Patch. (Except for SA finish).
- 1b **SSGWPFNH** Hydraulic Patch Door Kit (Non-hold open).
SSGWPFX5 Cladding Cover Plate for Top Patch. (Except for SA finish).
- 2 **SSGWPFX4** Wall Mount Transom Patch.
- 3 **SSGWPFX4** Wall Mount Transom Patch.
SSGWPFSTOP Door Stop for Transom Patch (Optional - not included).




- 1a **SSGWPF90** Hydraulic Patch Door Kit (90° Hold open).
SSGWPFX5 Cladding Cover Plate for Top Patch. (Except for SA finish).
- 1b **SSGWPFNH** Hydraulic Patch Door Kit (Non-hold open).
SSGWPFX5 Cladding Cover Plate for Top Patch. (Except for SA finish).
- 2 **SSGWPFX4** Wall Mount Transom Patch.
- 3a **SSGWPFX1** Sidelite Transom Patch, or
SSGWPFX2 Sidelite Transom Patch with Stopper.
- 3b **SSGWPFX3** Sidelite Mount Transom Patch.
SSGWPFSTOP Door Stop for Transom Patch (Optional - not included).



(3a)





(3b)

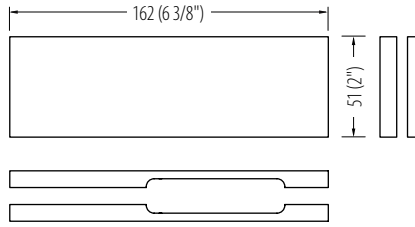

Cladding Cover Plate for Top Patch

Fits **SS6WPFX6**.


- SS6WPFX5SA** Brushed Clear Anodized Aluminum.
- SS6WPFX5SS** Satin Stainless Steel.
- SS6WPFX5B** Powder Coated Satin Black.

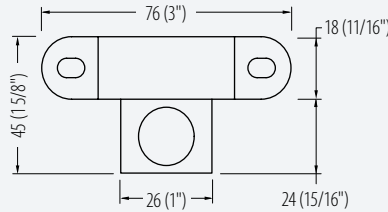

Door Stop for Transom Patch

Used for all finishes.


SS6WPFSTOP

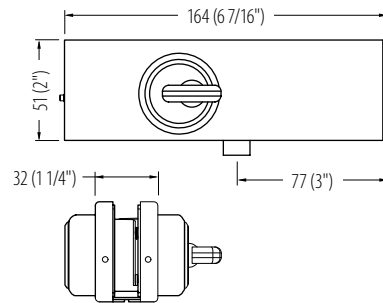

Bottom Mount Patch Lock with Strike Plate

- Installed at the bottom corner of the Glass Door.
- Glass-to-Floor applications.
- American type cylinder.
- Stainless Steel Cover with Aluminum Cast Body.


- SS6WPFX7SA** Brushed Clear Anodized Aluminum.
- SS6WPFX7SS** Satin Stainless Steel.
- SS6WPFX7B** Powder Coated Satin Black.

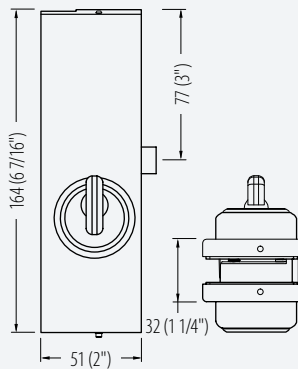

Center Mount Patch Lock with Strike Plate

- Glass-to-Wall applications.
- Installed vertically at the side of the Glass Door.
- American type Cylinder.
- Stainless Steel Cover with Aluminum Cast Body.

- SS6WPFX8SA** Brushed Clear Anodized Aluminum.
- SS6WPFX8SS** Satin Stainless Steel.
- SS6WPFX8B** Powder Coated Satin Black.

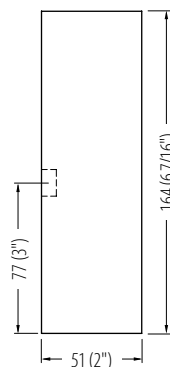


Strike Box for Patch Lock

- Used with Center Mount Patch Lock.
- Installed on Sidelite for Glass-to-Glass Patch Lock applications.

- SS6WPFX9SA** Brushed Clear Anodized Aluminum.
- SS6WPFX9SS** Satin Stainless Steel.
- SS6WPFX9B** Powder Coated Satin Black.


EAC Glass Door Round Ladder Handles

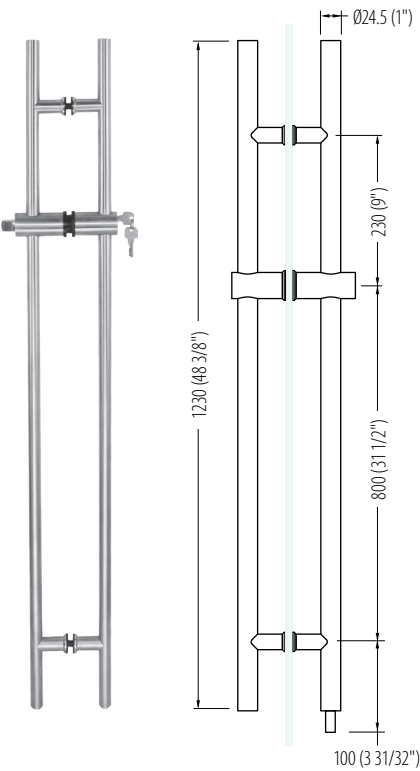

Lockable

- Modern and elegant design for office and commercial settings.
- Lockable Ladder Handle with 25.4mm (1") diameter available in 1228.7mm (48 3/8") height.
- Suitable for **10-12mm (3/8" - 1/2")** Glass.
- Glass hole size is 14mm (9/16").

Part #	Height (H)	Hole Space (C)	Tube Diameter	Finish
SSGWPfZ48S	1230 (48 3/8")	230 (9") top 800 (31 1/2") bottom	24.4 (1")	S

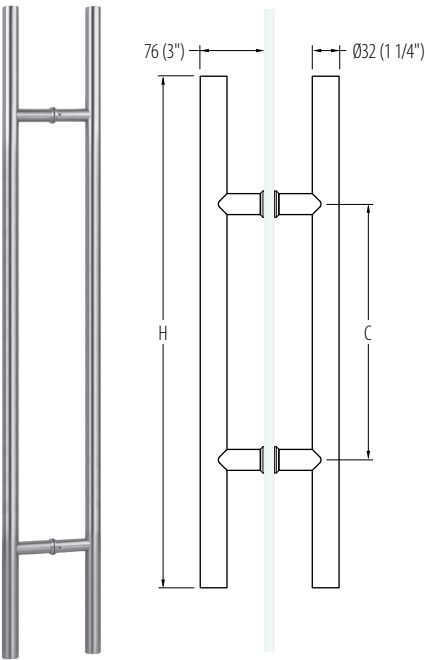

Standard Non-Lockable









- Modern and elegant design for office and commercial settings.
- Non-Lockable Ladder Handles with 31.8mm (1 1/4") diameter available in 6 heights.
- SS316 material with accompanying 31.8mm (1 1/4") Washers.
- Suitable for **8-12mm (3/8" - 1/2")** Glass.
- Glass hole size is 14mm (9/16").

Part #	Height (H)	Hole Space (C)	Tube Diameter	Finish
SSGWPfY12S	305 (12")	152 (6")	32 (1 1/4")	S
SSGWPfY12B	305 (12")	152 (6")	32 (1 1/4")	B
SSGWPfY24S	609 (24")	305 (12")	32 (1 1/4")	S
SSGWPfY24B	609 (24")	305 (12")	32 (1 1/4")	B
SSGWPfY36S	914 (36")	610 (24")	32 (1 1/4")	S
SSGWPfY36B	914 (36")	610 (24")	32 (1 1/4")	B
SSGWPfY48S	1220 (48")	914 (36")	32 (1 1/4")	S
SSGWPfY48B	1220 (48")	914 (36")	32 (1 1/4")	B
SSGWPfY60S	1520 (60")	1219 (48")	32 (1 1/4")	S
SSGWPfY60B	1520 (60")	1219 (48")	32 (1 1/4")	B
SSGWPfY72S	1828 (72")	1524 (60")	32 (1 1/4")	S
SSGWPfY72B	1828 (72")	1524 (60")	32 (1 1/4")	B

Looking for Shower Style Door Handles? View our full collection online.



This series of M-Locks incorporates a Magnetic Lock/Latch at its core. With only 31mm thickness, this sleek, stylish, and quiet Lock Set is a superior choice to traditional Lock Sets. The Lock Set material is Aluminum with options for Single Action and Dual Action. There are 3 designs, including Lockable, Non-Lockable, and with Knob. Available in 2 finishes: Brushed Clear Anodized Aluminum (A), and Brushed Black Anodized Aluminum (B).









Part #	Description
 SS6WLM1	Lockable, Single Action Key, Thumbturn, and Handles included.   Other side
 SS6WLM2	Non-lockable, Single Action Handles included. 
 SS6WLM3	With Knob, Single Action Thumbturn and Handles included.   Other side

M-Lock Single Action

The M-Lock Single Action Lock Set is for doors that only swing in one direction. The design of the Wall Strike has a ledge to prevent the door from swinging in both directions. Also, the indentation on the M-Lock Single Action sits against the ledge of the Wall Strike. Only Wall Strike is included with the Single Action Lock Set.

SPECIFICATIONS

- Door Type: Glass.
- Usage: Hinge Door.
- Handing Position / Opening Side: Reversible for Left or Right.
- Strike Plate Type: Wall Strike.
- Dimensions (L x W x H): 120 x 31 x 70mm (4 23/32" x 1 17/32" x 2 3/4").
- Door Thickness: 8-12.76mm (5/16" - 1/2").
- Material: Aluminum.

Part #	Description
 SS6WLM4	Lockable, Dual Action Key, Thumbturn, and Handles included.   Other side
 SS6WLM5	Non-lockable, dual Action Handles included. 
 SS6WLM6	With Knob, Dual Action Thumbturn and Handles included.   Other side

M-Lock Dual Action

The M-Lock Dual Action Lock Set is for doors that can swing freely in both directions. The Wall Strike does not have a ledge on it, and the lock does not have the same indentation as the M-Lock Single Action. Both Wall and Glass Strikes are included with the Dual Action Lock Set.

SPECIFICATIONS

- Door Type: Glass.
- Usage: Hinge Door.
- Handing Position/Opening Side: Reversible for Left or Right.
- Strike Plate Type: Wall Strike and Glass Strike.
- Dimensions (L x W x H): 120 x 31 x 70mm (4 23/32" x 1 17/32" x 2 3/4").
- Door Thickness: 8-12.76mm (5/16" - 1/2").
- Material: Aluminum.



This E-Lock is a Wireless Electronic Lock for Swing and Sliding Glass Doors that combines functionality with versatility. Keyless entry and no wiring needed. Available in Black.



E-Lock

FEATURES

- No Glass processing is required.
- Easy to install.
- Battery powered with 4 x AA 6V batteries required (not included).
- 4 locking/unlocking modes:
 1. Bluetooth via a downloadable smartphone app.
 2. Fingerprint.
 3. Numerical code.
 4. FOB badge.
- Possibility to generate timed entrance and unlocking codes.
- Record of access available via downloadable app.

SPECIFICATIONS

- Door Type: Glass.
- Usage: Hinge Door, Sliding Door.
- Handing Position/Opening Side: Reversible for Left or Right.
- Strike Plate Type: Glass Strike.
- Dimensions (W x H): 63 x 162mm (2 1/2" x 6 3/8").
- Door Thickness: **10-12mm (3/8" - 1/2")**.
- Working Temperature: -25°C-60°C.
- Working Humidity: 20%-90%.
- Material: Metal.

Part #	Description
SSGWLEGG	Glass-to-Glass Applications.
SSGWLEGW	Glass-to-Wall Applications.


Sliding Glass Door Kits



EAC Sliding Glass Door Kit

Our Sliding Glass Door Kits are Single Sliders that combine a sleek and simple look with easy functionality. Perfect for use in smaller spaces to avoid swinging doors and bulky Hinges, and can be mounted to a Wall or Glass. The SS316 Stainless Steel hardware is finished in Clear Satin, and SS304 Stainless Steel is finished in Powder Coated Satin Black.

Our Kits feature an extra security advantage where the Ball Bearing Rollers are equipped with Anti-lift mechanisms to prevent the door from lifting off of the Track. With the 6 Glass Mount Clamps securely fastened to the Glass Wall, the door remains stable during handling. The addition of 2 Floor Mount Door Stops, together with the left and right Track Stops ensure no recoil if the door is moved suddenly.

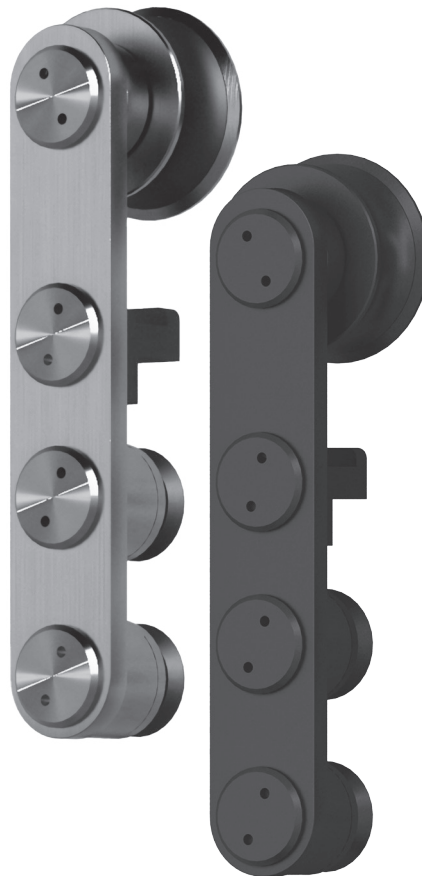

Sliding Glass Door for Wall Mount

Glass Thickness
10-12mm

A
Brushed Clear
Anodized
Aluminum

B
Powder
Coated
Satin Black



Single Sliding Glass Door Kit Wall Mount

- Suitable for 10-12mm (3/8"-1/2") Glass.
- Track is 25mm (1") dia. and 2650mm (104") long.
- Maximum Door weight: 100kg (220 lbs).

KIT INCLUDES: 1 Top Track, 6 Wall Mount clamps, 2 Sliding Door Rollers, 2 Top Track/Door Stops (left and right side), 2 Floor Mount Door Stops, 1 Floor Guide, Allen Key, Wrench, Fasteners.

- SSDS110** Satin Stainless Steel (SS316).
SSDS111 Powder Coated Satin Black (SS304).





Single Sliding Glass Door Kit Glass Mount

- Suitable for 10-12mm (3/8"-1/2") Glass.
- Track is 25mm (1") dia. and 2650mm (104") long.
- Maximum Door weight: 100kg (220 lbs).

KIT INCLUDES: 1 Top Track, 6 Glass Mount Clamps (including Surface and Flush Mount Fittings), 2 Top Track/Door Stops (left and right side), 2 Floor Mount Door Stops, 1 Floor Guide, Allen Key, Wrench, Fasteners.

- SSDS112** Satin Stainless Steel (SS316).
SSDS113 Powder Coated Satin Black (SS304).





Mold & Mildew Resistant

General Purpose Silicone

G.E. SILICONE

GESCS1200 - 299mL Clear.
GESCS1200W - 299mL White.

CS SILICONE

SILICONE1 - 300mL Clear.

Sanitary

G.E. SILICONE

GESCS1700 - 299mL Clear.

RICHELIEU SILICONE

SILICONE2 - 300mL Clear.



Planning a wine cellar? Explore our complete Wine Cellar Collection featuring Wine Pegs, Wood Racks, and Under Cabinet Stemware Holders.



Follow us on social media @euroeac YouTube: Euro Architectural Components





DISCLAIMER: Euro Architectural Components carefully reviewed to ensure that the content in this catalogue was accurate at the time of print. We are not responsible for misinformation due to human error. Images or colours may not be exact due to rendering, photographic, or printing procedures. Consult your local authorities to ensure your design complies with all building code requirements. For our complete terms & conditions scan here, or copy the following link: <https://euroeac.com/terms-conditions/>.

